

Mounting Instructions for SP1F and SP3F PressFIT Power Module

Introduction

This application note provides the main recommendations to appropriately connect the printed circuit board (PCB) to the SP1F and SP3F PressFIT power module and mount the power module to the heat sink. Follow the mounting instructions to limit both the thermal and mechanical stresses.

The PressFIT pin technology is a solderless connection method, with reliable mechanical and electrical contact that allows mounting the module on both sides of the PCB.

This application note does not cover each type of application and condition. The user is responsible for performing detailed qualification.

Figure 1. SP1F Power Module

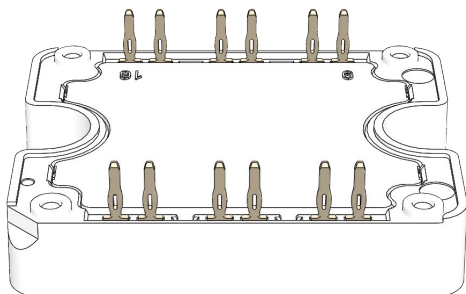


Figure 2. SP3F Power Module

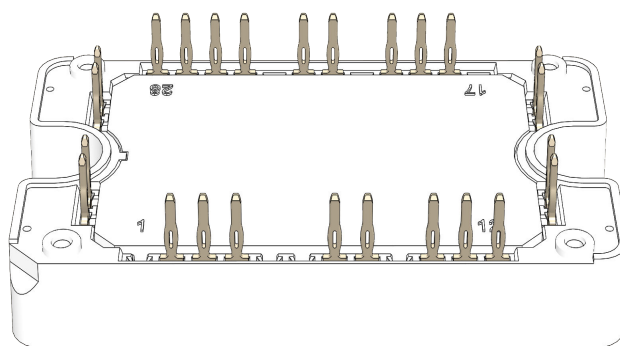


Table of Contents

Introduction.....	1
1. PCB Requirements.....	3
2. Components Next to Module Pins.....	4
3. Tools for Inserting the PressFIT Pin into the PCB.....	5
4. Using Plastite Screw.....	8
5. Heat Sink Characteristics.....	9
5.1. Thermal Grease Application.....	9
5.2. Mounting the Power Module to the Heat Sink.....	10
6. Tools for extracting the PressFIT Pin from the PCB.....	11
7. Revision History.....	13
The Microchip Website.....	14
Product Change Notification Service.....	14
Customer Support.....	14
Microchip Devices Code Protection Feature.....	14
Legal Notice.....	14
Trademarks.....	15
Quality Management System.....	16
Worldwide Sales and Service.....	17

1. PCB Requirements

The PressFIT technology is tested and qualified according to IEC60352-5 per the PCB requirements shown in the following table. If other processing or thickness technologies are used for PCB manufacturing, it must be tested, examined, and qualified.

The PressFIT technology is qualified for FR4 PCB material.

Figure 1-1. PCB Construction

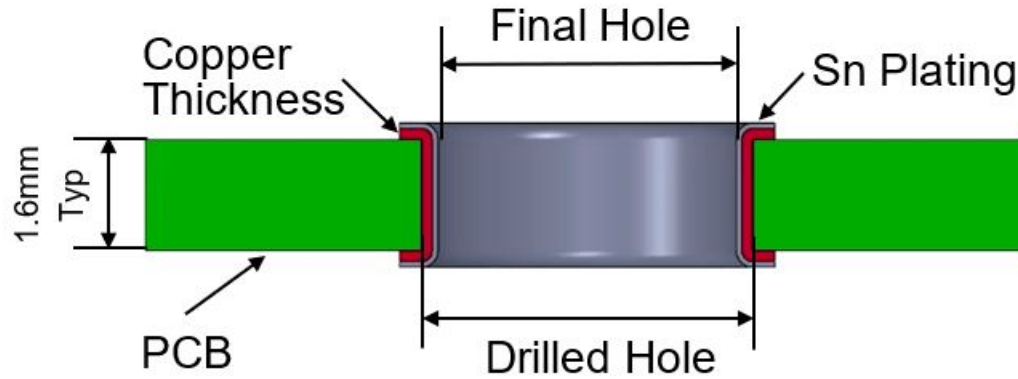


Table 1-1. PCB Requirements

Parameter	Minimum	Typical	Maximum	Unit
Drill hole diameter	1.5	1.55	1.6	mm
Final hole diameter	1.39	1.45	1.54	mm
Copper thickness in the hole	25	—	—	μm
Sn plating in the hole	4	—	10	μm
Copper thickness of the circuit board copper track	35	70	—	μm
PCB thickness	—	1.6	—	mm


2. Components Next to Module Pins

Design rules must be used to place the components such as resistors, diodes, or capacitors near the PressFIT pins. The SMD capacitor is the most sensitive component to mechanical stresses.

Microchip recommends to leave at least $A=4$ mm between the center of the PressFIT pin and the edge of the component on both sides of the PCB. This allows enough space for the pressing tool to avoid damaging the components while inserting or removing the PressFIT pins.

Holes in the PCB are necessary to insert and tighten the mounting screws that bolt down the power module to the heat sink. These access holes must be large for the screw head and washers to pass freely, allowing for standard tolerance in the PCB hole location. See the following figure, for more information.

Figure 2-1. Distance Between Components and the Middle of the Pins

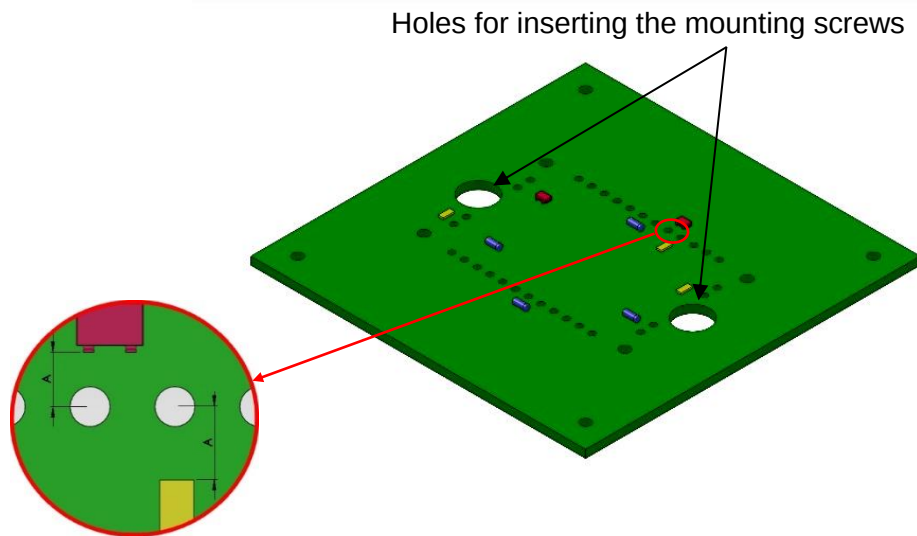

3. Tools for Inserting the PressFIT Pin into the PCB

Figure 3-1 shows the general mounting process for inserting the module in the PCB.

- The PCB is placed on the lower press-in tool. The PCB is well positioned with the help of spacers located on the lower press-in tool.
- The module is mounted on the PCB. See Figure 3-2.
- The machine exerts the force to push the PressFIT pins into the PCB. The module is well inserted when the module domes reach the PCB, see Figure 3-3.

The press process can be realized by an automatic machine. The insertion force per pin is 100N maximum and the recommended insertion speed is between 25 mm/min and 50 mm/min.

Figure 3-1. Tools for Inserting the PressFIT Pin into the PCB

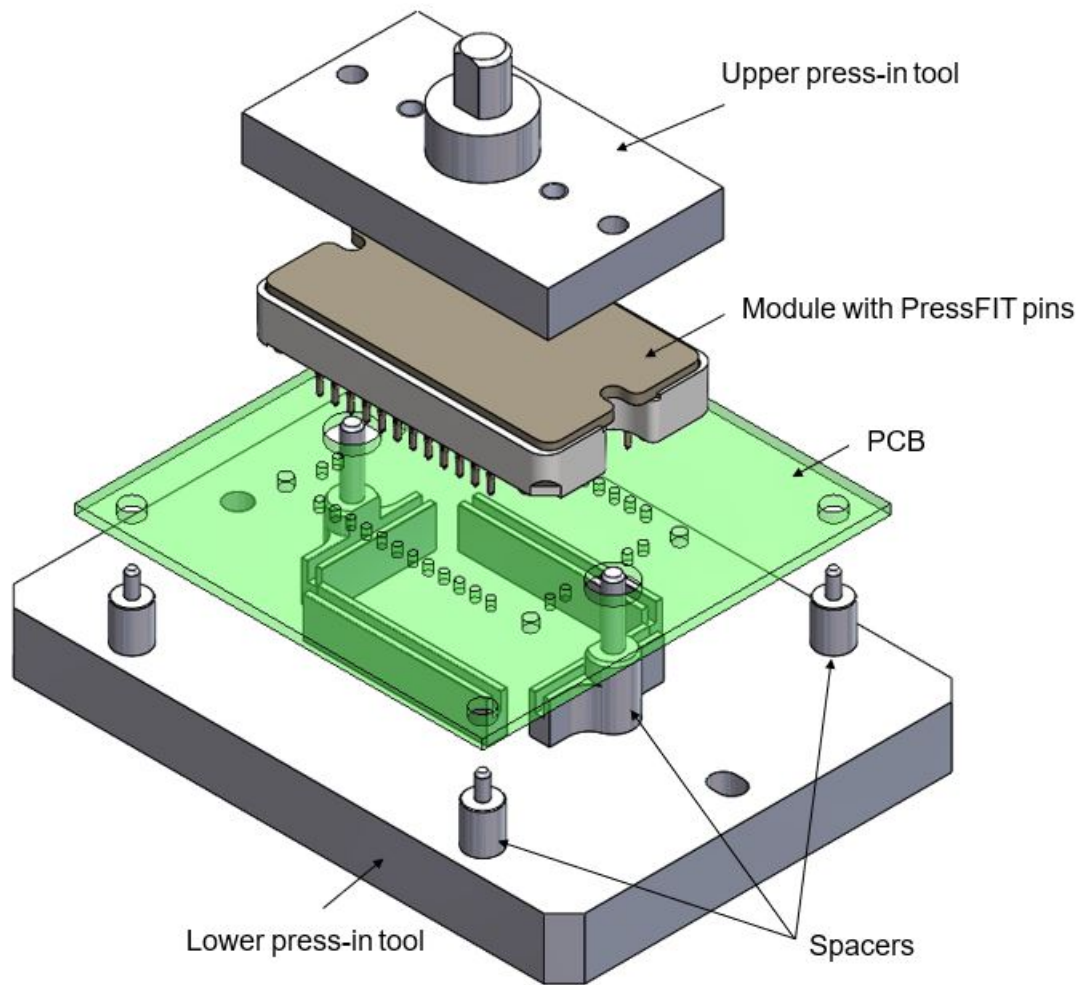


Figure 3-2. PCB with Module before the Insertion


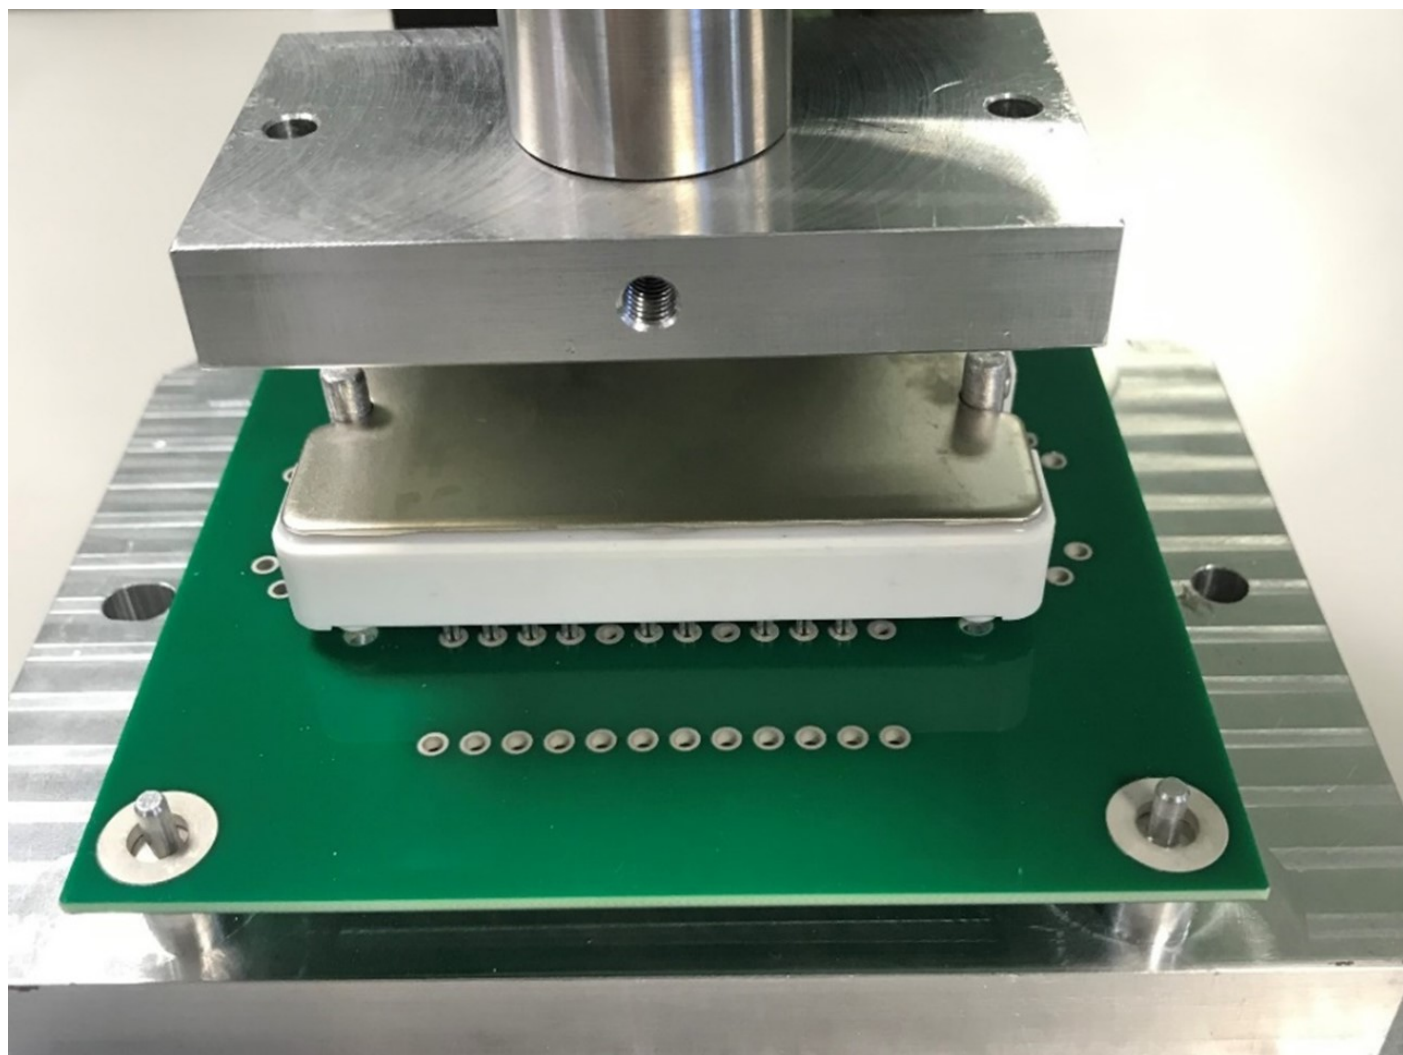



Figure 3-3. PressFIT Pins into the PCB

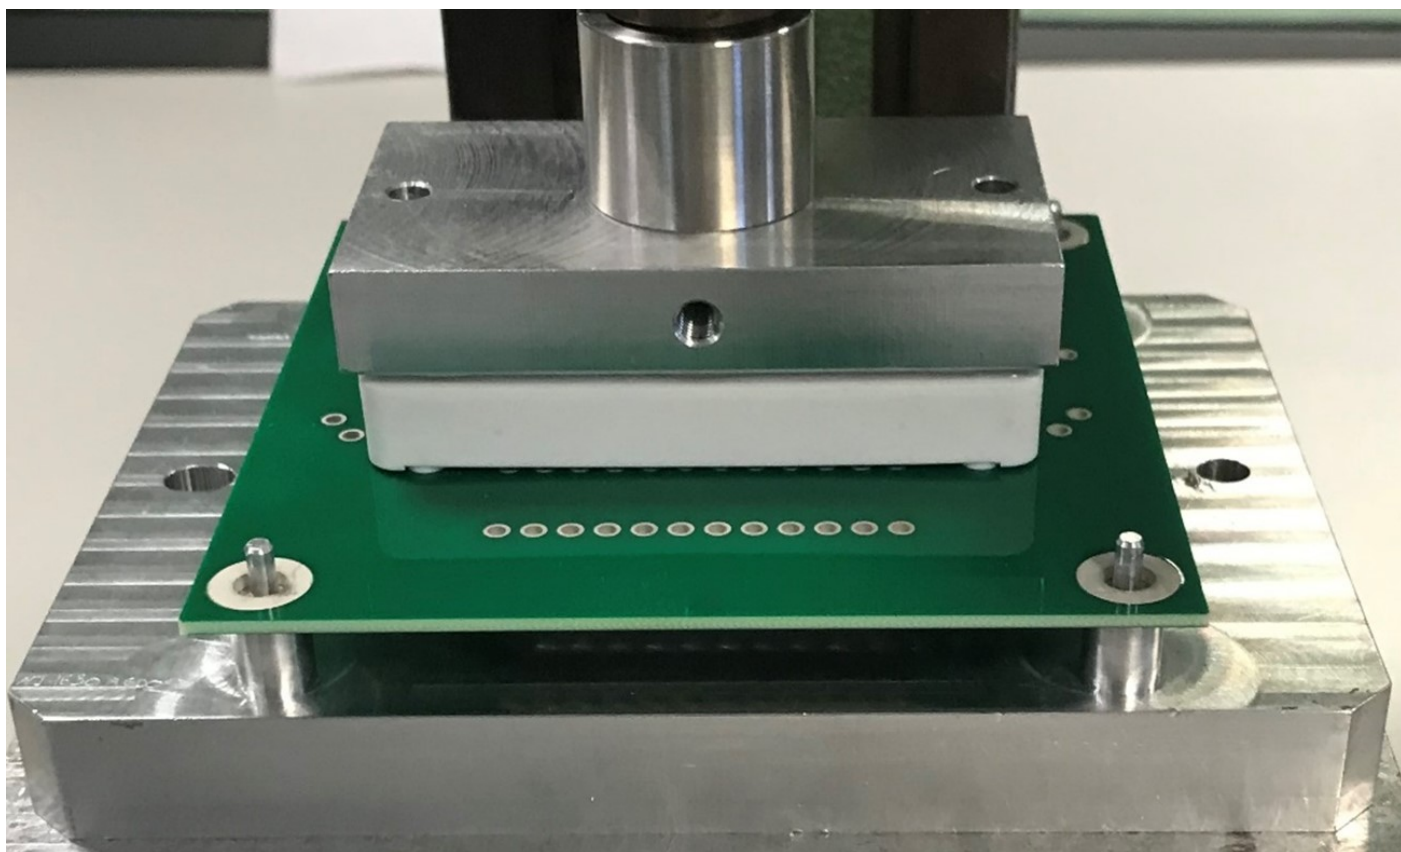

4. Using Plastite Screw

After the assembly process, the PressFIT contact between PCB and module must be mechanically relieved. Therefore, all the power modules must be screwed to the standoffs with plastite screws to reduce all mechanical stresses and minimize relative movements on the PressFIT contact. For more details, see the following figure.

Figure 4-1. Plastite Screws on Standoff

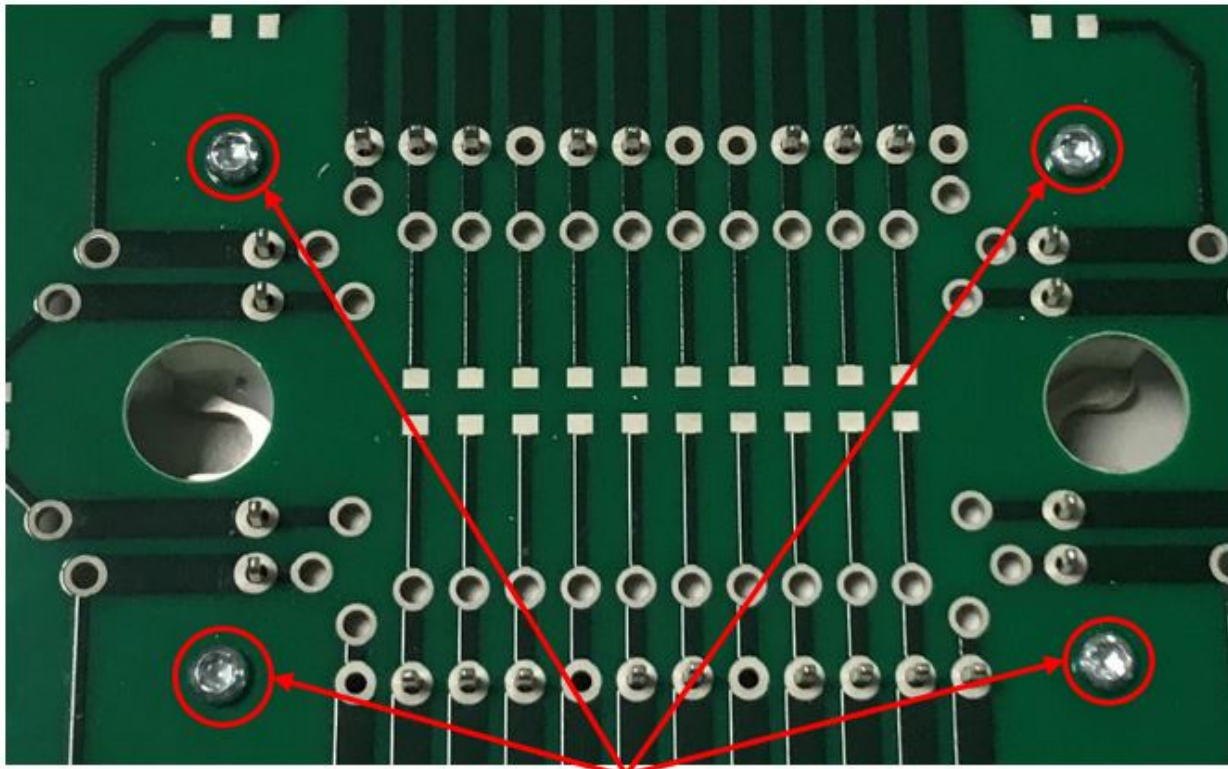

Plastite Screws

Microchip recommends a self-tapering plastite screw with a nominal diameter of 2.5 mm.

A plastite screw is a type of screw specifically designed for use with plastic and other low-density materials, see the following figure. The screw length depends on the PCB thickness. Use a plastite screw of 8 mm (0.32 inches) long on a PCB with a 1.6 mm (0.063 inches) thickness. Maximum mounting torque of 0.6 Nm (5 lbf*in) is recommended. The customer must check the integrity of the plastic post after screwing.

Figure 4-2. Example of Plastite Screw



5. Heat Sink Characteristics

Proper mounting of the module base plate to the heat sink is essential to guarantee good heat transfer. The heat sink and the power module contact surface must be flat and clean (no dirt, corrosion, or damage) to avoid mechanical stress when the power module is mounted, and to avoid an increase in thermal resistance.

Note: Recommended flatness is $<50\text{ }\mu\text{m}$ for 100 mm continuous and recommended roughness is Rz 10.


5.1 Thermal Grease Application

A thin layer of thermal grease must be applied between the power module and the heat sink to achieve the lowest case to heat sink thermal resistance.

Microchip recommends the use of screen printing technique to ensure uniform deposition of a minimum thickness of $60\text{ }\mu\text{m}$ (2.4 mils) on the heat sink, see the following figure.

The thermal interfacing between the module and the heat sink can be made with another type of conductive thermal interface material, such as a phase-change compound (screen-printed or adhesive layer).

Figure 5-1. Grease on the Heat Sink Prior to Assembling

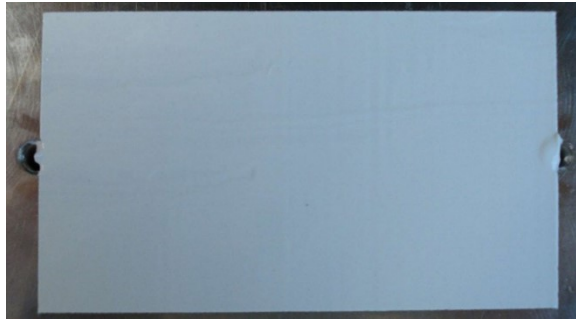

5.2 Mounting the Power Module to the Heat Sink

Place the power module above heat sink holes and apply slight pressure to it. Insert the M4 screw with lock and flat washers in each mounting hole (a #8 screw can be used instead of M4).

First, lightly tighten the mounting screws. Tighten the screws alternatively until their final torque value is reached. (See the *product datasheet* for the maximum torque allowed).


Microchip recommends the use of a screwdriver with controlled torque for this operation. If possible, screws can be tightened again after three hours.

The quantity of thermal grease is correct when a small amount of grease appears around the power module once it is bolted down into the heat sink with the appropriate mounting torque. In any case, the module bottom surface must be completely wet with thermal grease. See the following figure.

Figure 5-2. Grease on the Heat Sink After Removing the Module



Figure 5-3. Grease on the Module after Disassembling

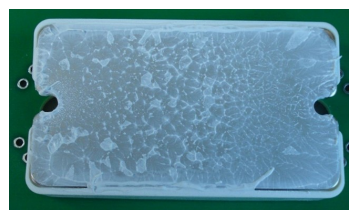

Note: The gap between the screws top height and the nearest terminal must be checked to maintain safe insulation spacing.

6. Tools for extracting the PressFIT Pin from the PCB

Figure 6-1 show the general process for removing the module from the PCB.

1. Remove the plastite screws from the PCB.
2. Place the Module and the PCB on the lower press-out tool, as shown in Figure 6-2.
3. The machine exerts the force on the PressFIT pins in to push out the module from the PCB, see Figure 6-2 and Figure 6-3.

The press process can be realized by an automatic machine. The insertion force per pin is 100N maximum and the recommended insertion speed is between 25 mm/min and 50 mm/min.

Figure 6-1. Tools for Extracting the PressFIT Pin from the PCB

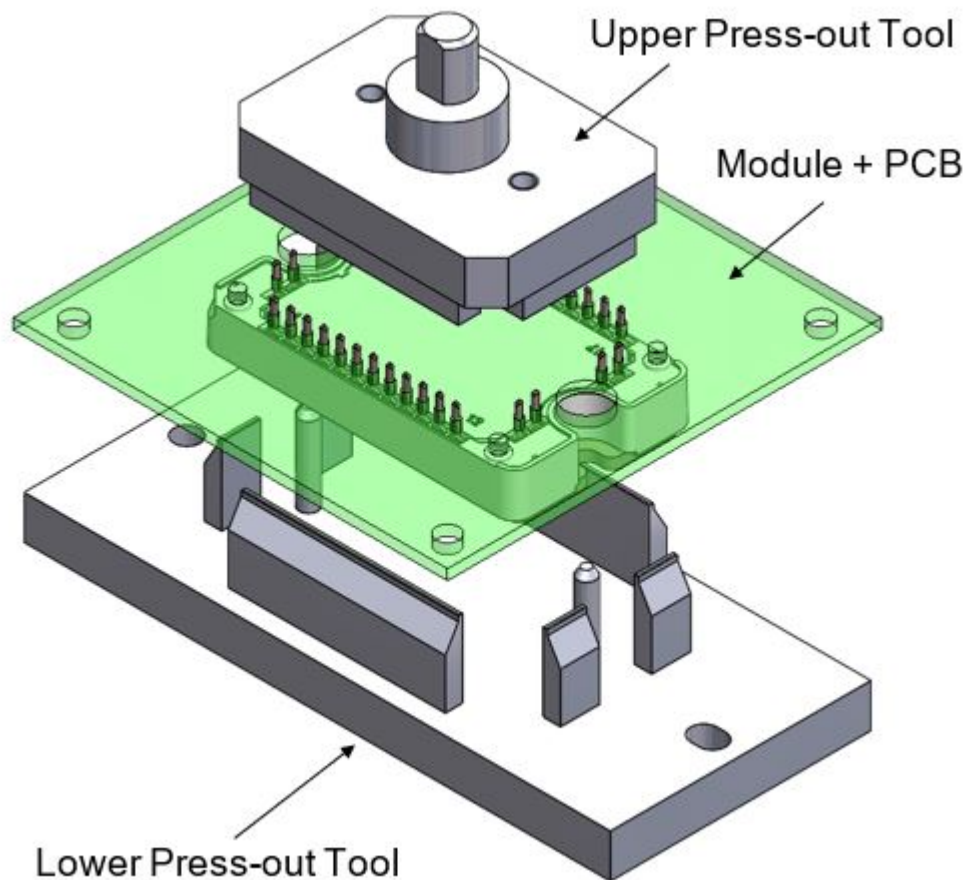
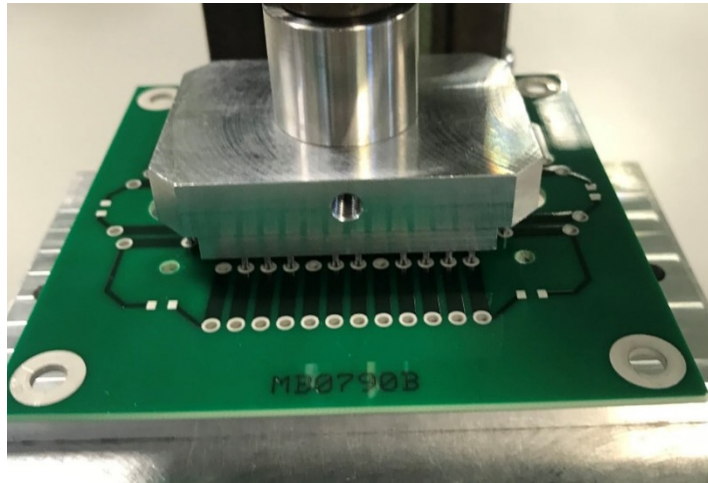
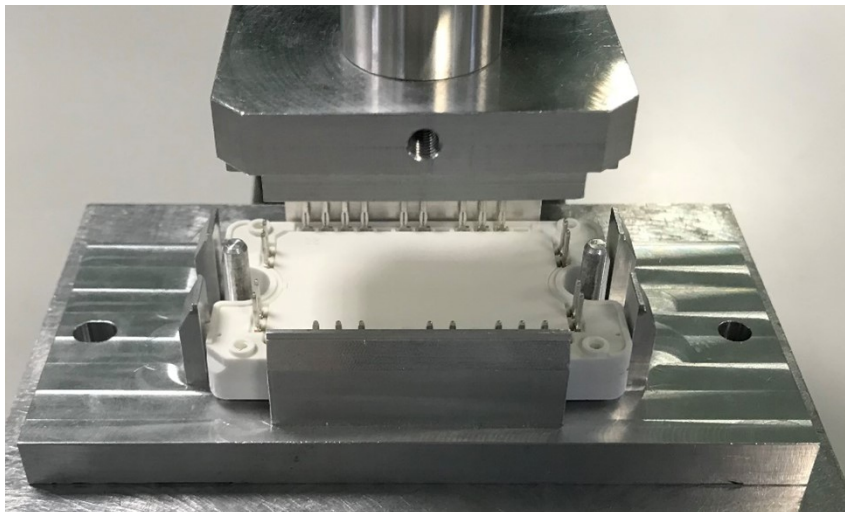


Figure 6-2. PCB with Module Before the Extraction**Figure 6-3. Module Removed****Conclusion**

This application note provides main recommendations regarding the PressFIT mounting and dismounting instructions. Applying these instructions helps decrease the mechanical stress both on the PCB and the power module and therefore ensures the long-term operation of the system. Mounting instructions to the heat sink must also be followed to achieve the lowest thermal resistance from the power chips down to the cooling section. These operations are essential to guarantee the best system reliability and achieve the highest mean time between failure (MTBF).

After the PressFIT Power Module is pressed out and if it is electrically and mechanically good, this module can only be refitted by soldering to the PCB.

7. Revision History

Revision	Date	Description
A	12/2021	The following changes are made in this revision: • Updated the document as per Microchip standards. • The document number was updated to DS00004322. • Application note number was updated to AN4322.

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable". Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, KleeR, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet- Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVM Express, NVMe, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2021, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-5224-9406-5

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com	Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040	India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820