


## 3M™ Specialty Bagged Terminals: 3M™ Standard Forks

## Vinyl Insulated Butted Seam Standard Fork, Bag

Terminal Type Fork  
 Terminal Style Standard  
 Insulation Material Vinyl  
 Barrel Style Butted  
 RoHS 2011/65/EU Yes  
 Agency Approval 

Manufacturing Origin

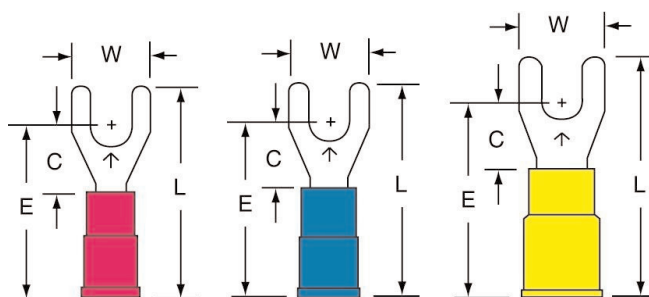


| Product No. | UPC          | Description | Conductor Size | Stud Size | (W)   | (C)   | (L)   | (E)   | Thickness | Barrel I.D. | Max. Insul. Dia. | Qty./Bag |
|-------------|--------------|-------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|----------|
| 94769       | 054007-94769 | 31-6-P      | 22 - 18 AWG    | 6         | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94771       | 054007-94771 | 31-8-P      | 22 - 18 AWG    | 8         | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94767       | 054007-94767 | 31-10-P     | 22 - 18 AWG    | 10        | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94775       | 054007-94775 | 32-6-P      | 16 - 14 AWG    | 6         | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.090"      | 0.170"           | 100      |
| 94777       | 054007-94777 | 32-8-P      | 16 - 14 AWG    | 8         | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.090"      | 0.170"           | 100      |
| 94773       | 054007-94773 | 32-10-P     | 16 - 14 AWG    | 10        | 0.34" | 0.29" | 0.90" | 0.74" | 0.030"    | 0.090"      | 0.170"           | 100      |
| 94783       | 054007-94783 | 33-8-P      | 12 - 10 AWG    | 8         | 0.38" | 0.29" | 1.03" | 0.84" | 0.030"    | 0.135"      | 0.250"           | 100      |
| 94779       | 054007-94779 | 33-10-P     | 12 - 10 AWG    | 10        | 0.38" | 0.29" | 1.03" | 0.84" | 0.030"    | 0.135"      | 0.250"           | 100      |

## Nylon Insulated with Insulation Grip Standard Fork, Bag

Terminal Type Fork  
 Terminal Style Standard  
 Insulation Material Nylon with Insulation Grip  
 Barrel Style Butted  
 RoHS 2011/65/EU Yes  
 Agency Approval 

Manufacturing Origin

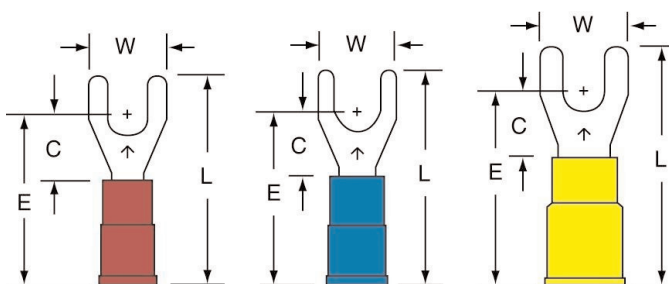

| Product No. | UPC          | Description | Conductor Size | Stud Size | (W)   | (C)   | (L)   | (E)   | Thickness | Barrel I.D. | Max. Insul. Dia. | Qty./Bag |
|-------------|--------------|-------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|----------|
| 94768       | 054007-94768 | 31-6-NB     | 22 - 18 AWG    | 6         | 0.34" | 0.29" | 0.89" | 0.73" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94770       | 054007-94770 | 31-8-NB     | 22 - 18 AWG    | 8         | 0.34" | 0.29" | 0.89" | 0.73" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94774       | 054007-94774 | 32-6-NB     | 16 - 14 AWG    | 6         | 0.34" | 0.29" | 0.91" | 0.75" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94776       | 054007-94776 | 32-8-NB     | 16 - 14 AWG    | 8         | 0.34" | 0.29" | 0.91" | 0.75" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94772       | 054007-94772 | 32-10-NB    | 16 - 14 AWG    | 10        | 0.34" | 0.29" | 0.91" | 0.75" | 0.030"    | 0.070"      | 0.145"           | 100      |
| 94780       | 054007-94780 | 33-6-NB     | 12 - 10 AWG    | 6         | 0.38" | 0.29" | 1.03" | 0.84" | 0.040"    | 0.135"      | 0.250"           | 50       |
| 94778       | 054007-94778 | 33-10-NB    | 12 - 10 AWG    | 10        | 0.38" | 0.29" | 1.03" | 0.84" | 0.040"    | 0.135"      | 0.250"           | 50       |