

## Features

- Programmable 4,194,304 x 1 and 8,388,608 x 1-bit Serial Memories Designed to Store Configuration Programs for Field Programmable Gate Arrays (FPGAs)
- 3.3V Output Capability
- 5V Tolerant I/O Pins
- Program Support using the Atmel ATDH2200E System or Industry Third Party Programmers
- In-System Programmable (ISP) via 2-wire Bus
- Simple Interface to SRAM FPGAs
- Compatible with Atmel AT40K and AT94K Devices, Altera® FLEX®, Excalibur™, Stratix™, Cyclone™ and APEX™ Devices
- Cascadable Read-back to Support Additional Configurations or Higher-density Arrays
- Low-power CMOS FLASH Process
- Available in 20-lead PLCC and 32-lead TQFP Packages
- Emulation of Atmel's AT24CXXX Serial EEPROMs
- Low-power Standby Mode
- Single Device Capable of Holding 4 Bit Stream Files Allowing Simple System Reconfiguration
- Fast Serial Download Speeds up to 33 MHz
- Endurance: 5,000 Write Cycles Typical
- LHF Package Available (Lead and Halide Free)

## 1. Description

The AT17FxxxA Series of In-System Programmable Configuration PROMs (Configurators) provide an easy-to-use, cost-effective configuration memory for Field Programmable Gate Arrays. The AT17FxxxA Series device is packaged in the 20-lead PLCC and 32-lead TQFP, see [Table 1-1](#). The AT17FxxxA Series Configurator uses a simple serial-access procedure to configure one or more FPGA devices.

The AT17FxxxA Series Configurators can be programmed with industry-standard programmers, Atmel's ATDH2200E Programming Kit or Atmel's ATDH2225 ISP Cable.

**Table 1-1.** AT17FxxxA Series Packages

| Package      | AT17F040A | AT17F080A |
|--------------|-----------|-----------|
| 8-lead LAP   | Yes       | Yes       |
| 20-lead PLCC | Yes       | Yes       |
| 32-lead TQFP | Yes       | Yes       |



## FPGA Configuration Flash Memory

**AT17F040A**  
**AT17F080A**




## 2. Pin Configuration


### 8-lead LAP

|          |   |   |            |
|----------|---|---|------------|
| DATA     | 1 | 8 | VCC        |
| DCLK     | 2 | 7 | SER_EN     |
| RESET/OE | 3 | 6 | (A2) nCASC |
| nCS      | 4 | 5 | GND        |


### 20-lead PLCC

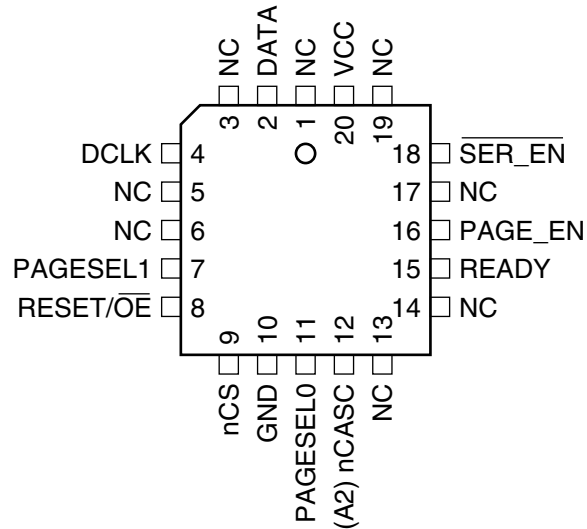

### 32-lead TQFP

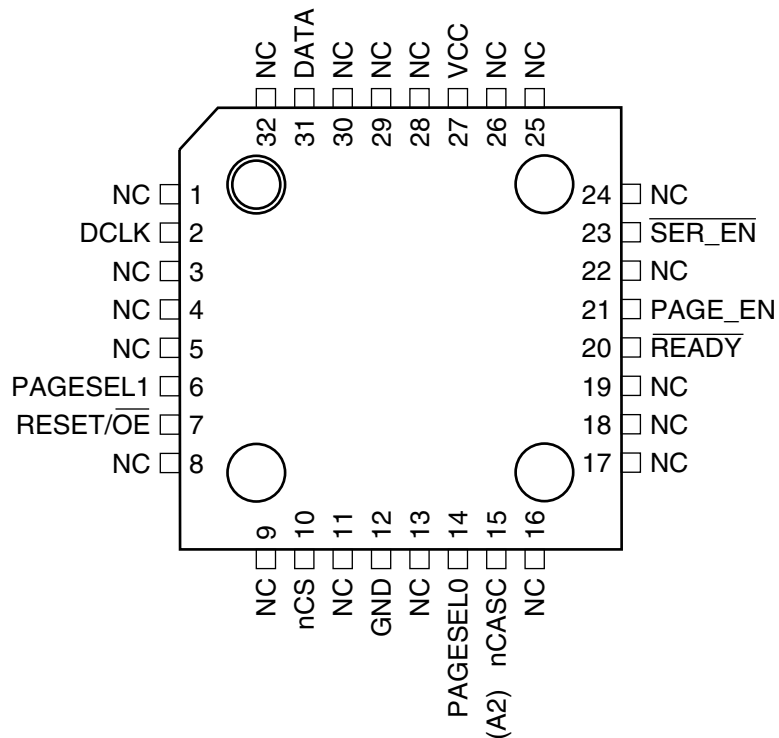

### 3. Block Diagram

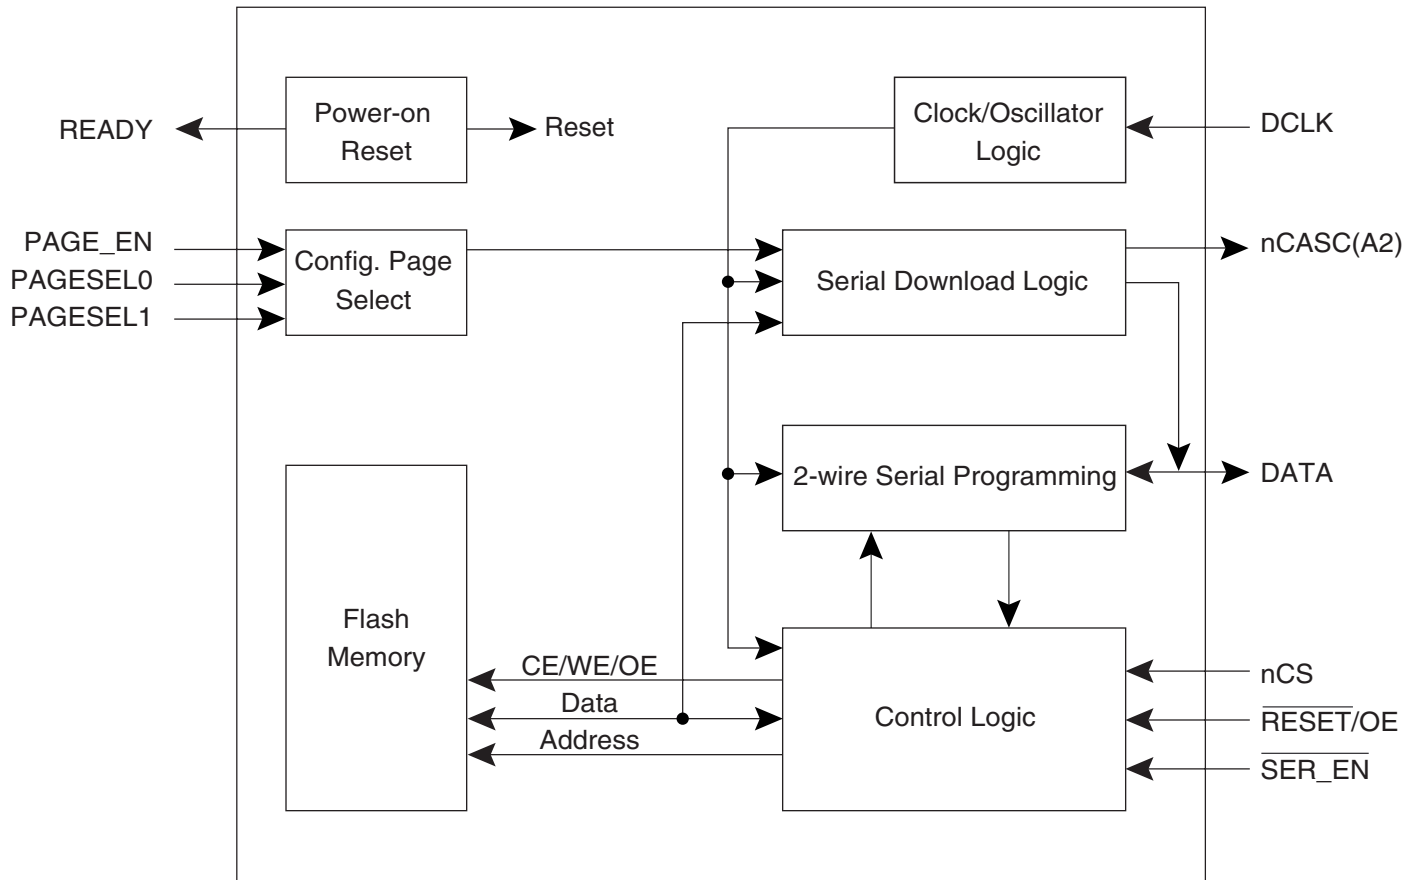

### 4. Device Description

The control signals for the configuration memory device (**nCS**, **RESET/OE** and **DCLK**) interface directly with the FPGA device control signals. All FPGA devices can control the entire configuration process and retrieve data from the configuration device without requiring an external intelligent controller.

The **RESET/OE** and **nCS** pins control the tri-state buffer on the **DATA** output pin and enable the address counter. When **RESET/OE** is driven Low, the configuration device resets its address counter and tri-states its **DATA** pin. The **nCS** pin also controls the output of the AT17FxxxA Series Configurator. If **nCS** is held High after the **RESET/OE** reset pulse, the counter is disabled and the **DATA** output pin is tri-stated. When **OE** is subsequently driven High, the counter and the **DATA** output pin are enabled. When **RESET/OE** is driven Low again, the address counter is reset and the **DATA** output pin is tri-stated, regardless of the state of **nCS**.

When the configurator has driven out all of its data and **nCASC** is driven Low, the device tri-states the **DATA** pin to avoid contention with other configurators. Upon power-up, the address counter is automatically reset.

## 5. Pin Description

**Table 5-1.** Pin Description

| Name            | I/O | AT17F040A/080A |         |
|-----------------|-----|----------------|---------|
|                 |     | 20 PLCC        | 32 TQFP |
| DATA            | I/O | 2              | 31      |
| DCLK            | I   | 4              | 2       |
| PAGE_EN         | I   | 16             | 21      |
| PAGESEL0        | I   | 11             | 14      |
| PAGESEL1        | I   | 7              | 6       |
| RESET/OE        | I   | 8              | 7       |
| nCS             | I   | 9              | 10      |
| GND             | –   | 10             | 12      |
| nCASC           | O   | 12             | 15      |
| A2              | I   |                |         |
| READY           | O   | 15             | 20      |
| SER_EN          | I   | 18             | 23      |
| V <sub>CC</sub> | –   | 20             | 27      |

### 5.1 DATA<sup>(1)</sup>

Three-state DATA output for FPGA configuration. Open-collector bi-directional pin for configuration programming.

### 5.2 DCLK<sup>(1)</sup>

Three-state clock. Functions as an input when the Configurator is in programming mode (i.e. SER\_EN is Low) and as an output during FPGA configuration.

### 5.3 PAGE\_EN<sup>(2)</sup>

Input used to enable page download mode. When PAGE\_EN is high the configuration download address space is partitioned into 4 equal pages. This gives users the ability to easily store and retrieve multiple configuration bitstreams from a single configuration device. This input works in conjunction with the PAGESEL inputs. PAGE\_EN must remain low if paging is not desired. When SER\_EN is Low (ISP mode) this pin has no effect.

Notes: 1. This pin has an internal 20 K $\Omega$  pull-up resistor.  
2. This pin has an internal 30 K $\Omega$  pull-down resistor.

## 5.4 PAGESEL[1:0]<sup>(2)</sup>

Page select inputs. Used to determine which of the 4 memory pages are targeted during a serial configuration download. The address space for each of the pages is shown in [Table 5-2](#). When  $\overline{\text{SER\_EN}}$  is Low (ISP mode) these pins have no effect.

**Table 5-2.** Address Space

| Paging Decodes            | AT17F040A (4 Mbits) | AT17F080A (8 Mbits) |
|---------------------------|---------------------|---------------------|
| PAGESEL = 00, PAGE_EN = 1 | 00000 – 0FFFFh      | 00000 – 1FFFFh      |
| PAGESEL = 01, PAGE_EN = 1 | 10000 – 1FFFFh      | 20000 – 3FFFFh      |
| PAGESEL = 10, PAGE_EN = 1 | 20000 – 2FFFFh      | 40000 – 5FFFFh      |
| PAGESEL = 11, PAGE_EN = 1 | 30000 – 3FFFFh      | 60000 – 7FFFFh      |
| PAGESEL = XX, PAGE_EN = 0 | 00000 – 3FFFFh      | 00000 – 7FFFFh      |

## 5.5 $\overline{\text{RESET/OE}}$ <sup>(1)</sup>

Output Enable (active High) and RESET (active Low) when  $\overline{\text{SER\_EN}}$  is High. A Low level on  $\overline{\text{RESET/OE}}$  resets both the address and bit counters. A High level (with nCS Low) enables the data output driver.

## 5.6 nCS<sup>(1)</sup>

Chip Enable input (active Low). A Low level (with OE High) allows DCLK to increment the address counter and enables the data output driver. A High level on nCS disables both the address and bit counters and forces the device into a low-power standby mode. Note that this pin will *not* enable/disable the device in the 2-wire Serial Programming mode ( $\overline{\text{SER\_EN}}$  Low).

## 5.7 GND

Ground pin. A 0.2  $\mu\text{F}$  decoupling capacitor between  $V_{\text{CC}}$  and GND is recommended.

## 5.8 nCASC

Cascade Select Output (when  $\overline{\text{SER\_EN}}$  is High). This output goes Low when the internal address counter has reached its maximum value. If the PAGE\_EN input is set High, the maximum value is the highest address in the selected partition. The PAGESEL[1:0] inputs are used to make the 4 partition selections. If the PAGE\_EN input is set Low, the device is not partitioned and the address maximum value is the highest address in the device, see [Table 5-2 on page 5](#). In a daisy chain of AT17FxxxA Series devices, the nCASC pin of one device must be connected to the nCS input of the next device in the chain. It will stay Low as long as nCS is Low and OE is High. It will then follow nCS until OE goes Low; thereafter, nCASC will stay High until the entire EEPROM is read again.

## 5.9 A2<sup>(1)</sup>

Device selection input, (when  $\overline{\text{SER\_EN}}$  Low). The input is used to enable (or chip select) the device during programming (i.e., when  $\overline{\text{SER\_EN}}$  is Low). Refer to the AT17FxxxA Programming Specification available on the Atmel web site for additional details.

- Notes:
1. This pin has an internal 20 K $\Omega$  pull-up resistor.
  2. This pin has an internal 30 K $\Omega$  pull-down resistor.

## 5.10 READY

Open collector reset state indicator. Driven Low during power-up reset, released when power-up is complete. (recommended 4.7 k $\Omega$  pull-up on this pin if used).

## 5.11 SER\_EN<sup>(1)</sup>

The serial enable input must remain High during FPGA configuration operations. Bringing SER\_EN Low enables the 2-Wire Serial Programming Mode. For non-ISP applications, SER\_EN should be tied to V<sub>CC</sub>.

## 5.12 V<sub>CC</sub>

+3.3V ( $\pm 10\%$ ).

Notes: 1. This pin has an internal 20 K $\Omega$  pull-up resistor.

## 6. FPGA Master Serial Mode Summary

The I/O and logic functions of any SRAM-based FPGA are established by a configuration program. The program is loaded either automatically upon power-up, or on command, depending on the state of the FPGA mode pins. In Master mode, the FPGA automatically loads the configuration program from an external memory. The AT17FxxxA Serial Configuration PROM has been designed for compatibility with the Master Serial mode.

This document discusses the Atmel AT40K, AT40KAL and AT94KAL applications as well as Altera applications.

## 7. Control of Configuration

Most connections between the FPGA device and the AT17FxxxA Serial Configurator PROM are simple and self-explanatory.

- The DATA output of the AT17FxxxA Series Configurator drives DIN of the FPGA devices.
- The DCLK output of the AT17FxxxA device drives the DCLK input data of the FPGA.
- The nCASC output of a AT17FxxxA Series Configurator drives the nCS input of the next Configurator in a cascade chain of configurator devices.
- $\overline{\text{SER\_EN}}$  must be at logic High level (internal pull-up resistor provided) except during ISP.
- The READY pin is available as an open-collector indicator of the device's reset status; it is driven Low while the device is in its power-on reset cycle and released (tri-stated) when the cycle is complete.
- PAGE\_EN must REMAIN Low if download paging is not desired. If paging is desired, PAGE\_EN must be High and the PAGESEL pins must be set to High or Low such that the desired page is selected, see [Table 5-2 on page 5](#).

## 8. Cascading Serial Configuration Devices

For multiple FPGAs configured as a daisy-chain, or for FPGAs requiring larger configuration memories, cascaded configurators provide additional memory.

After the last bit from the first configurator is read, the clock signal to the configurator asserts its nCASC output Low and disables its DATA line driver. The second configurator recognizes the Low level on its nCS input and enables its DATA output.

After configuration is complete, the address counters of all cascaded configurators are reset if the  $\overline{\text{RESET/OE}}$  on each configurator is driven to its active (Low) level.

If the address counters are not to be reset upon completion, then the  $\overline{\text{RESET/OE}}$  input can be tied to its inactive (High) level.

## 9. Programming Mode

The programming mode is entered by bringing  $\overline{\text{SER\_EN}}$  Low. In this mode the chip can be programmed by the 2-wire serial bus. The programming is done at  $V_{CC}$  supply only. Programming super voltages are generated inside the chip. The AT17FxxxA parts are read/write at 3.3V nominal. Refer to the AT17FxxxA Programming Specification available on the Atmel web site ([www.atmel.com](http://www.atmel.com)) for more programming details. AT17FxxxA devices are supported by the Atmel ATDH2200 programming system along with many third party programmers.

## 10. Standby Mode

The AT17FxxxA Series Configurators enter a low-power standby mode whenever  $\overline{\text{SER\_EN}}$  is High and nCS is asserted High. In this mode, the AT17FxxxA Configurator typically consumes less than 1 mA of current at 3.3V. The output remains in a high-impedance state regardless of the state of the OE input.

## 11. Absolute Maximum Ratings\*

|                                                    |                          |
|----------------------------------------------------|--------------------------|
| Operating Temperature.....                         | -40°C to +85°C           |
| Storage Temperature .....                          | -65°C to +150°C          |
| Voltage on Any Pin<br>with Respect to Ground ..... | -0.5V to $V_{CC} + 0.5V$ |
| Supply Voltage ( $V_{CC}$ ) .....                  | -0.5V to +4.0V           |
| Maximum Soldering Temp. (10 sec. @ 1/16 in.).....  | 260°C                    |
| ESD ( $R_{ZAP} = 1.5K$ , $C_{ZAP} = 100$ pF).....  | 2000V                    |

\*NOTICE: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those listed under operating conditions is not implied. Exposure to Absolute Maximum Rating conditions for extended periods of time may affect device reliability.

## 12. Operating Conditions

| Symbol   | Description |                                                  | AT17FxxxA Series Configurator |      | Units |
|----------|-------------|--------------------------------------------------|-------------------------------|------|-------|
|          |             |                                                  | Min                           | Max  |       |
| $V_{CC}$ | Commercial  | Supply voltage relative to GND<br>-0°C to +70°C  | 2.97                          | 3.63 | V     |
|          | Industrial  | Supply voltage relative to GND<br>-40°C to +85°C | 2.97                          | 3.63 | V     |

## 13. DC Characteristics

| Symbol           | Description                                                                |            | AT17F040A |                 | AT17F080A |                 | Units |
|------------------|----------------------------------------------------------------------------|------------|-----------|-----------------|-----------|-----------------|-------|
|                  |                                                                            |            | Min       | Max             | Min       | Max             |       |
| V <sub>IH</sub>  | High-level Input Voltage                                                   |            | 2.0       | V <sub>CC</sub> | 2.0       | V <sub>CC</sub> | V     |
| V <sub>IL</sub>  | Low-level Input Voltage                                                    |            | 0         | 0.8             | 0         | 0.8             | V     |
| V <sub>OH</sub>  | High-level Output Voltage (I <sub>OH</sub> = -2.5 mA)                      | Commercial | 2.4       |                 | 2.4       |                 | V     |
| V <sub>OL</sub>  | Low-level Output Voltage (I <sub>OL</sub> = +3 mA)                         |            |           | 0.4             |           | 0.4             | V     |
| V <sub>OH</sub>  | High-level Output Voltage (I <sub>OH</sub> = -2 mA)                        | Industrial | 2.4       |                 | 2.4       |                 | V     |
| V <sub>OL</sub>  | Low-level Output Voltage (I <sub>OL</sub> = +3 mA)                         |            |           | 0.4             |           | 0.4             | V     |
| I <sub>CCA</sub> | Supply Current, Active Mode at Freq. Max.                                  |            |           | 50              |           | 50              | mA    |
| I <sub>L</sub>   | Input or Output Leakage Current (V <sub>IN</sub> = V <sub>CC</sub> or GND) |            | -10       | 10              | -10       | 10              | μA    |
| I <sub>CCS</sub> | Supply Current, Standby Mode                                               | Commercial |           | 3               |           | 3               | mA    |
|                  |                                                                            | Industrial |           | 3               |           | 3               | mA    |



## 16. AC Characteristics

| Symbol                          | Description                                                             |                           | AT17F040A/080A |     |     | Units |
|---------------------------------|-------------------------------------------------------------------------|---------------------------|----------------|-----|-----|-------|
|                                 |                                                                         |                           | Min            | Typ | Max |       |
| T <sub>OE</sub> <sup>(2)</sup>  | OE to Data Delay                                                        | Commercial                |                |     | 50  | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                |     | 55  | ns    |
| T <sub>CE</sub> <sup>(2)</sup>  | nCS to Data Delay                                                       | Commercial                |                |     | 55  | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                |     | 60  | ns    |
| T <sub>CAC</sub> <sup>(2)</sup> | DCLK to Data Delay                                                      | Commercial                |                |     | 30  | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                |     | 30  | ns    |
| T <sub>OH</sub>                 | Data Hold from nCS, OE, or DCLK                                         | Commercial                | 0              |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 0              |     |     | ns    |
| T <sub>DF</sub> <sup>(3)</sup>  | nCS or OE to Data Float Delay                                           | Commercial                |                |     | 15  | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                |     | 15  | ns    |
| T <sub>LC</sub>                 | DCLK Low Time                                                           | Commercial                | 15             |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 15             |     |     | ns    |
| T <sub>HC</sub>                 | DCLK High Time                                                          | Commercial                | 15             |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 15             |     |     | ns    |
| T <sub>SCE</sub>                | nCS Setup Time to DCLK<br>(to guarantee proper counting)                | Commercial                | 20             |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 25             |     |     | ns    |
| T <sub>HCE</sub>                | nCS Hold Time from DCLK<br>(to guarantee proper counting)               | Commercial                | 0              |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 0              |     |     | ns    |
| T <sub>HOE</sub>                | $\overline{\text{RESET}}$ /OE Low Time<br>(guarantees counter is reset) | Commercial                | 20             |     |     | ns    |
|                                 |                                                                         | Industrial <sup>(1)</sup> | 20             |     |     | ns    |
| F <sub>MAX</sub>                | Maximum Input Clock Frequency<br>$\overline{\text{SEREN}} = 0$          | Commercial                |                |     | 10  | MHz   |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                |     | 10  | MHz   |
| T <sub>WR</sub>                 | Write Cycle Time <sup>(4)</sup>                                         | Commercial                |                | 12  |     | μs    |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                | 12  |     | μs    |
| T <sub>EC</sub>                 | Erase Cycle Time <sup>(4)</sup>                                         | Commercial                |                | 13  |     | s     |
|                                 |                                                                         | Industrial <sup>(1)</sup> |                | 13  |     | s     |

- Notes:
1. Preliminary specifications for military operating range only.
  2. AC test lead = 50 pF.
  3. Float delays are measured with 5 pF AC loads. Transition is measured  $\pm 200$  mV from steady-state active levels.
  4. See the AT17FxxxA Programming Specification for procedural information.

## 16.1 AC Characteristics When Cascading

| Symbol          | Description                          |            | AT17F040A |     | AT17F080A |     | Units |
|-----------------|--------------------------------------|------------|-----------|-----|-----------|-----|-------|
|                 |                                      |            | Min       | Max | Min       | Max |       |
| $T_{CDF}^{(3)}$ | DCLK to Data Float Delay             | Commercial |           | 50  |           | 50  | ns    |
|                 |                                      | Industrial |           | 50  |           | 50  | ns    |
| $T_{OCK}^{(2)}$ | DCLK to nCASC Delay                  | Commercial |           | 50  |           | 50  | ns    |
|                 |                                      | Industrial |           | 55  |           | 55  | ns    |
| $T_{OCE}^{(2)}$ | $\overline{nCS}$ to nCASC Delay      | Commercial |           | 35  |           | 35  | ns    |
|                 |                                      | Industrial |           | 40  |           | 40  | ns    |
| $T_{OOE}^{(2)}$ | $\overline{RESET/OE}$ to nCASC Delay | Commercial |           | 35  |           | 35  | ns    |
|                 |                                      | Industrial |           | 25  |           | 35  | ns    |

- Notes: 1. AC test lead = 50 pF.  
 2. Float delays are measured with 5 pF AC loads. Transition is measured  $\pm 200$  mV from steady-state active levels.

## 17. Thermal Resistance Coefficients

| Package Type |                                       |                                          | AT17F040A | AT17F080A |
|--------------|---------------------------------------|------------------------------------------|-----------|-----------|
| 20J          | Plastic Leaded Chip Carrier (PLCC)    | $\theta_{JC} [^{\circ}\text{C/W}]$       |           | —         |
|              |                                       | $\theta_{JA} [^{\circ}\text{C/W}]^{(1)}$ |           | —         |
| 32A          | Thin Plastic Quad Flat Package (TQFP) | $\theta_{JC} [^{\circ}\text{C/W}]$       | 17        | 17        |
|              |                                       | $\theta_{JA} [^{\circ}\text{C/W}]^{(1)}$ | 62        | 62        |

- Note: 1. Airflow = 0 ft/min.




## 18. Ordering Information

| Memory Size | Ordering Code                    | Package                        | Operation Range                   |
|-------------|----------------------------------|--------------------------------|-----------------------------------|
| 4-Mbit      | AT17F040A-30JC<br>AT17F040A-30QC | 20J - 20 PLCC<br>32A - 32 TQFP | Commercial<br>(0°C to 70°C)       |
|             | AT17F040A-30JI<br>AT17F040A-30QI | 20J - 20 PLCC<br>32A - 32 TQFP | Industrial<br>(-40°C to 85°C)     |
| 4-Mbit      | AT17F040A-30CU<br>AT17F040A-30JU | 8CN4 -8 LAP<br>20J - 20 PLCC   | LHF Industrial<br>(-40°C to 85°C) |
| 8-Mbit      | AT17F080A-30JC<br>AT17F080A-30QC | 20J - 20 PLCC<br>32A - 32 TQFP | Commercial<br>(0°C to 70°C)       |
|             | AT17F080A-30JI<br>AT17F080A-30QC | 20J - 20 PLCC<br>32A - 32 TQFP | Industrial<br>(-40°C to 85°C)     |
| 8-Mbit      | AT17F080A-30CU<br>AT17F080A-30JU | 8CN4 -8 LAP<br>20J - 20 PLCC   | LHF Industrial<br>(-40°C to 85°C) |

| Package Type |                                                                                                          |
|--------------|----------------------------------------------------------------------------------------------------------|
| <b>8CN4</b>  | 8-lead, 6 mm x 6 mm x 1 mm, Leadless Array Package (LAP) - Pin-compatible with 8-lead SOIC/VOIC Packages |
| <b>20J</b>   | 20-lead, Plastic J-leaded Chip Carrier (PLCC)                                                            |
| <b>32A</b>   | 32-lead, Thin (1.0 mm) Plastic Quad Flat Package Carrier (TQFP)                                          |


## 19. Packaging Information

### 19.1 8CN4 – LAP

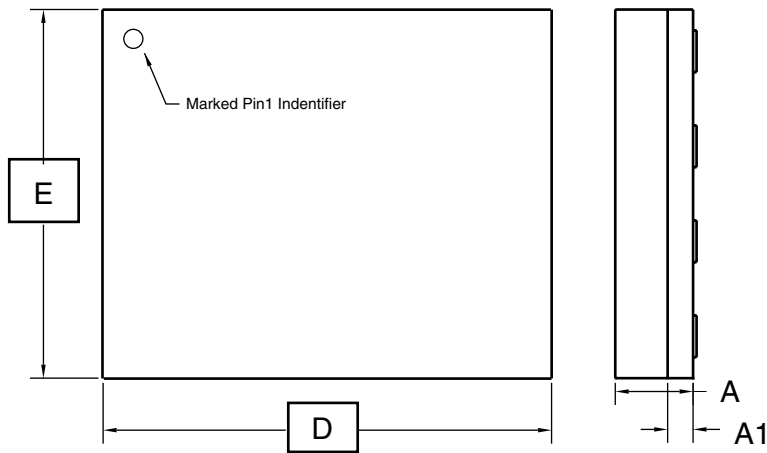

Top View

Side View

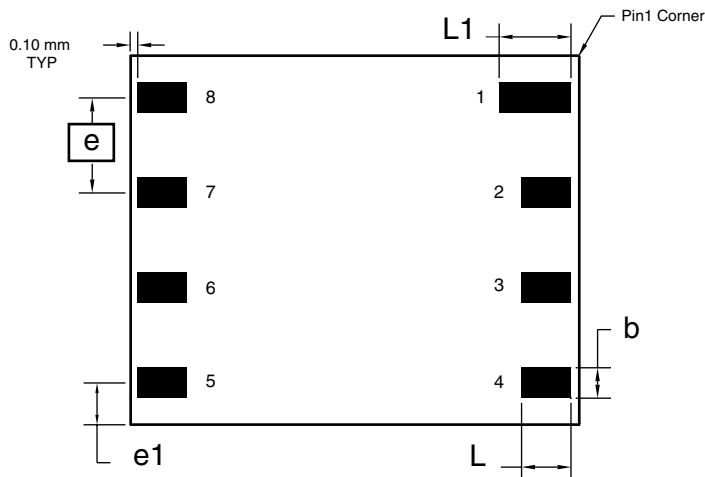

Bottom View

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM  | MAX  | NOTE |
|--------|----------|------|------|------|
| A      | 0.94     | 1.04 | 1.14 |      |
| A1     | 0.30     | 0.34 | 0.38 |      |
| b      | 0.45     | 0.50 | 0.55 | 1    |
| D      | 5.89     | 5.99 | 6.09 |      |
| E      | 4.89     | 5.99 | 6.09 |      |
| e      | 1.27 BSC |      |      |      |
| e1     | 1.10 REF |      |      |      |
| L      | 0.95     | 1.00 | 1.05 | 1    |
| L1     | 1.25     | 1.30 | 1.35 | 1    |

Note: 1. Metal Pad Dimensions.

11/14/01



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**8CN4**, 8-lead (6 x 6 x 1.04 mm Body), Lead Pitch 1.27 mm,  
Leadless Array Package (LAP)

**DRAWING NO.**


8CN4

**REV.**

A



## 19.2 20J – PLCC

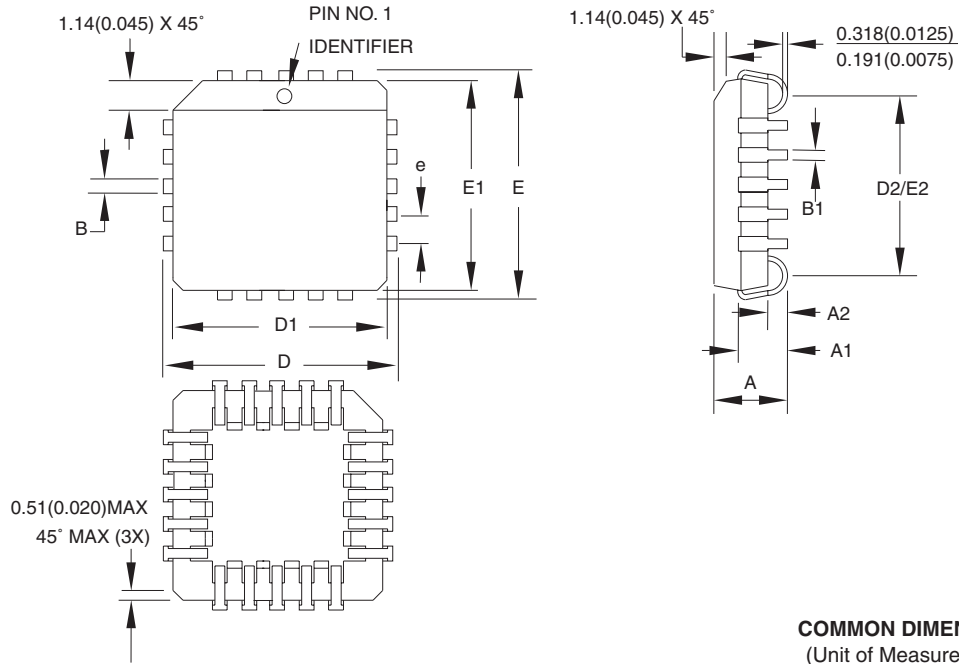

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | 4.191     | —   | 4.572  |        |
| A1     | 2.286     | —   | 3.048  |        |
| A2     | 0.508     | —   | —      |        |
| D      | 9.779     | —   | 10.033 |        |
| D1     | 8.890     | —   | 9.042  | Note 2 |
| E      | 9.779     | —   | 10.033 |        |
| E1     | 8.890     | —   | 9.042  | Note 2 |
| D2/E2  | 7.366     | —   | 8.382  |        |
| B      | 0.660     | —   | 0.813  |        |
| B1     | 0.330     | —   | 0.533  |        |
| e      | 1.270 TYP |     |        |        |

- Notes:
1. This package conforms to JEDEC reference MS-018, Variation AA.
  2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is .010" (0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
  3. Lead coplanarity is 0.004" (0.102 mm) maximum.

10/04/01



2325 Orchard Parkway  
San Jose, CA 95131

### TITLE

**20J**, 20-lead, Plastic J-leaded Chip Carrier (PLCC)


### DRAWING NO.

20J

### REV.

B

## 19.3 32A – TQFP

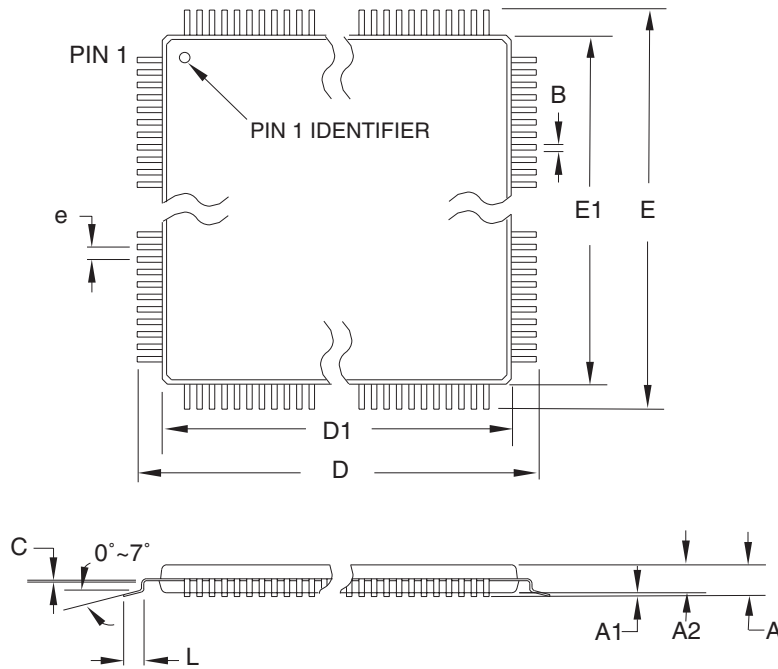

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM  | MAX  | NOTE   |
|--------|----------|------|------|--------|
| A      | —        | —    | 1.20 |        |
| A1     | 0.05     | —    | 0.15 |        |
| A2     | 0.95     | 1.00 | 1.05 |        |
| D      | 8.75     | 9.00 | 9.25 |        |
| D1     | 6.90     | 7.00 | 7.10 | Note 2 |
| E      | 8.75     | 9.00 | 9.25 |        |
| E1     | 6.90     | 7.00 | 7.10 | Note 2 |
| B      | 0.30     | —    | 0.45 |        |
| C      | 0.09     | —    | 0.20 |        |
| L      | 0.45     | —    | 0.75 |        |
| e      | 0.80 TYP |      |      |        |

- Notes:
1. This package conforms to JEDEC reference MS-026, Variation ABA.
  2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
  3. Lead coplanarity is 0.10 mm maximum.

10/5/2001



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**32A**, 32-lead, 7 x 7 mm Body Size, 1.0 mm Body Thickness,  
0.8 mm Lead Pitch, Thin Profile Plastic Quad Flat Package (TQFP)

**DRAWING NO.**

32A

**REV.**

B



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenalux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

## Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2005. All rights reserved. Atmel®, logo and combinations thereof, and others are registered trademarks, and Everywhere You Are<sup>SM</sup> and others are the trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.

2823C-CNFG-2/05