FEED-THROUGH FLAT BASE EUROSTRIPS®
300V - Panel Mount


For wire-to-wire connections in HVAC, appliance, equipment, power distribution and other industrial applications with strict budget and space requirements.

Easy to use double row terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. Simply strip the wire, insert, and tighten the screw.[a] Eurostrips® feature tubular screw clamps, with or without wire protectors, and recessed metal parts for finger protection. The wire protectors include an integral wire stop in the center of the terminal. The stainless steel wire protectors exhibit excellent memory and the wire stop insures the most effective connection.


Eurostrips® described on this and the following page are available with a flat base for minimum clearance applications. They can be panel mounted or left to free float. Offered in easy to cut standard 12 pole strips, they can also be ordered precut with the required number of poles.

- Tubular Screw Clamp
- With or Without Wire Protectors
- Panel Mount or Free Float
- Housing Material: Polyamide 6.6
- Color: Opaque White
- Marking Plates or Factory Imprinted



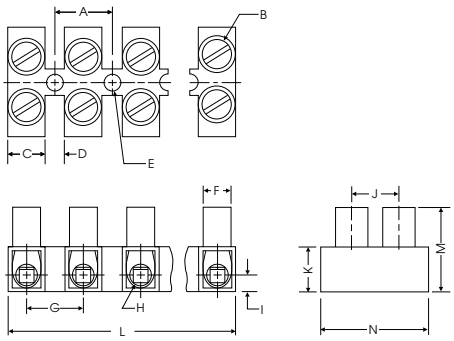



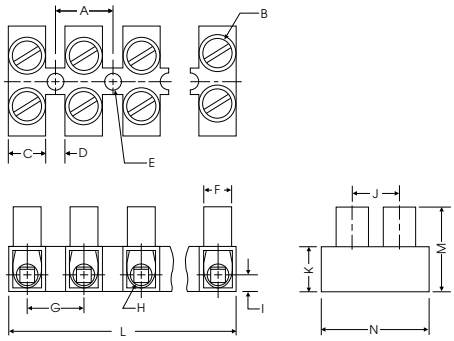

TS1.5

Flat Base
Pole Spacing 8mm (.315)
Mounting Hole Diameter 2.8mm (.110)
Stripping Length 5mm (.197)

TS2.5

Flat Base
Pole Spacing 10mm (.394)
Mounting Hole Diameter 3.5mm (.138)
Stripping Length 6mm (.236)

Ratings	**Wire Range**	**Current**	**Voltage**	**Wire Range**	**Current**	**Voltage**
IEC/VDE	1.5mm²	18A	380V	2.5mm²	26A	380V
(File No. E148805)	22-12 AWG	20A	300V	22-10 AWG	30A	300V
(File No. LR38962)	22-16 AWG	15A	300V	18-12 AWG	30A	300V

Ordering Information	**No. of Poles**	**Type**	**Cat. No.**	**Length (L) mm (in.)**	**Std. Pk.**	**Type**	**Cat. No.**	**Length (L) mm (in.)**	**Std. Pk.**
Eurostrip®, Flat Base with Wire Protector	**2**	TS1.5/2wp	**40.002**	13.6 (.53)	100	TS2.5/2wp	**40.202**	17.0 (.67)	100
	3	TS1.5/3wp	**40.003**	21.5 (.85)	100	TS2.5/3wp	**40.203**	27.0 (1.06)	100
	4	TS1.5/4wp	**40.004**	29.5 (1.16)	100	TS2.5/4wp	**40.204**	37.0 (1.46)	100
	5	TS1.5/5wp	**40.005**	37.4 (1.47)	100	TS2.5/5wp	**40.205**	47.0 (1.85)	100
	6	TS1.5/6wp	**40.006**	45.4 (1.79)	50	TS2.5/6wp	**40.206**	57.0 (2.24)	50
	7	TS1.5/7wp	**40.007**	53.3 (2.10)	50	TS2.5/7wp	**40.207**	67.0 (2.64)	50
	8	TS1.5/8wp	**40.008**	61.3 (2.41)	50	TS2.5/8wp	**40.208**	77.0 (3.03)	50
	9	TS1.5/9wp	**40.009**	69.2 (2.72)	50	TS2.5/9wp	**40.209**	87.0 (3.43)	50
	10	TS1.5/10wp	**40.010**	77.2 (3.04)	50	TS2.5/10wp	**40.210**	97.0 (3.82)	50
	11	TS1.5/11wp	**40.011**	85.1 (3.35)	50	TS2.5/11wp	**40.211**	107.0 (4.21)	50
	12	TS1.5/12wp	**40.012**	93.0 (3.66)	50	TS2.5/12wp	**40.212**	117.0 (4.61)	50
Eurostrip®, Flat Base without Wire Protector[b]	**2**	TS1.5/2	**40.052**	13.6 (.53)	100	TS2.5/2	**40.252**	17.0 (.67)	100
	3	TS1.5/3	**40.053**	21.5 (.85)	100	TS2.5/3	**40.253**	27.0 (1.06)	100
	4	TS1.5/4	**40.054**	29.5 (1.16)	100	TS2.5/4	**40.254**	37.0 (1.46)	100
	5	TS1.5/5	**40.055**	37.4 (1.47)	100	TS2.5/5	**40.255**	47.0 (1.85)	100
	6	TS1.5/6	**40.056**	45.4 (1.79)	50	TS2.5/6	**40.256**	57.0 (2.24)	50
	7	TS1.5/7	**40.057**	53.3 (2.10)	50	TS2.5/7	**40.257**	67.0 (2.64)	50
	8	TS1.5/8	**40.058**	61.3 (2.41)	50	TS2.5/8	**40.258**	77.0 (3.03)	50
	9	TS1.5/9	**40.059**	69.2 (2.72)	50	TS2.5/9	**40.259**	87.0 (3.43)	50
	10	TS1.5/10	**40.060**	77.2 (3.04)	50	TS2.5/10	**40.260**	97.0 (3.82)	50
	11	TS1.5/11	**40.061**	85.1 (3.35)	50	TS2.5/11	**40.261**	107.0 (4.21)	50
	12	TS1.5/12	**40.062**	93.0 (3.66)	50	TS2.5/12	**40.262**	117.0 (4.61)	50

For Accessories, please refer to pages 50, 51

Dimensions mm (in.)


A = 8.0 (.315)
B = M2.5 x 4.3
C = 5.6 (.221)
D = 2.4 (.095)
E = Ø2.8 (.110)
F = Ø5.35 (.211)
G = 8.0 (.315)
H = Ø3.0 (.118)
I = 2.5(.099)
J = 7.5 (.2.96)
K = 6.7 (.264)
M = 13.7 (.540)
N = 18.2 (.716)

Dimensions mm (in.)

A = 10.0 (.394)
B = M3 x 5.8
C = 6.4 (.252)
D = 3.5 (.138)
E = Ø3.5 (.137)
F = Ø5.7 (.225)
G = 10.0 (.394)
H = Ø3.6 (.142)
I = 3.0 (.118)
J = 9.5 (.374)
K = 8.0 (.315)
M = 15.5 (.611)
N = 21.8 (.858)

[a] Clamp screws are zinc chromated steel. Stainless steel or nickle plated brass screws are available, consult Altech for ordering information.
[b] Use for solid wire or wire with a ferrule.



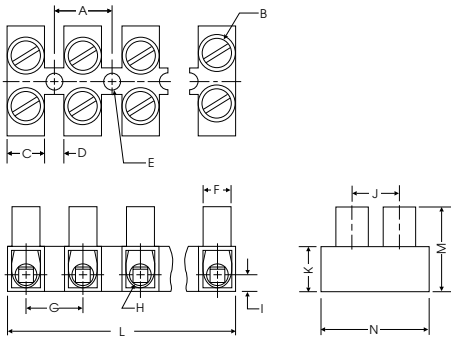

TS6

Flat Base
Pole Spacing 12mm (.472)
Mounting Hole Diameter 4.2mm (.165)
Stripping Length 7mm (.276)

Wire Range	Current	Voltage
6mm^2	44A	380V
20-8 AWG	40A	300V
18-10 AWG	40A	300V

Type	Cat. No.	Length (L) mm (in.)	Std. Pk.
TS6/2wp	**40.402**	20.0 (.79)	100
TS6/3wp	**40.403**	32.0 (1.26)	100
TS6/4wp	**40.404**	44.0 (1.73)	100
TS6/5wp	**40.405**	56.0 (2.21)	100
TS6/6wp	**40.406**	68.0 (2.68)	50
TS6/7wp	**40.407**	80.0 (3.15)	50
TS6/8wp	**40.408**	92.0 (3.62)	50
TS6/9wp	**40.409**	104.0 (4.10)	50
TS6/10wp	**40.410**	116.0 (4.57)	25
TS6/11wp	**40.411**	128.0 (5.03)	25
TS6/12wp	**40.412**	140.0 (5.51)	25
TS6/2	**40.452**	20.0 (.79)	100
TS6/3	**40.453**	32.0 (1.26)	100
TS6/4	**40.454**	44.0 (1.73)	100
TS6/5	**40.455**	56.0 (2.21)	100
TS6/6	**40.456**	68.0 (2.68)	50
TS6/7	**40.457**	80.0 (3.15)	50
TS6/8	**40.458**	92.0 (3.62)	50
TS6/9	**40.459**	104.0 (4.10)	50
TS6/10	**40.460**	116.0 (4.57)	25
TS6/11	**40.461**	128.0 (5.03)	25
TS6/12	**40.462**	140.0 (5.51)	25

Dimensions mm (in.)

A = 12.0 (.472)
B = M3.5 x 7
C = 7.6 (.299)
D = 4.3 (.169)
E = Ø4.4 (.173)
F = Ø6.8 (.268)
G = 12.0 (.472)
H = Ø4.2 (.165)
I = 4.3 (.169)
J = 9.5 (.374)
K = 9.0 (.354)
M = 17.7 (.697)
N = 23.0 (.906)

FEED-THROUGH EUROSTRIPS®

300V and 600V Standoff Feet Panel Mount


For wire-to-wire connections in HVAC, appliance, equipment, power distribution and other industrial applications with restricted budget and space requirements.

Easy to use double row terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. Simply strip the wire, insert, and tighten the screw.[a] Eurostrips® feature tubular screw clamps, with or without wire protectors, and recessed screws and contacts to prevent shocks and shorts. The wire protectors include an integral wire stop in the center of the terminal. The stainless steel wire protectors exhibit excellent memory and the wire stop insures the most efficient connection.

Eurostrips described on this and the following page are available with standoff feet for increased wiring efficiency. They can be panel mounted or left to free float. Offered in easy to cut 12 pole strips, they can also be ordered precut with the required number of poles.

- Tubular Screw Clamp
- With or Without Wire Protectors
- Panel Mount or Free Float
- Housing Material: Polyamide 6.6
- Color: Opaque White
- Marking Plates or Factory Imprinted




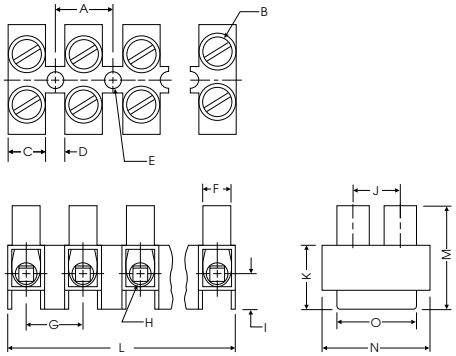

TSF1.5

Standoff Feet
Pole Spacing 8mm (.315)
Mounting Hole Diameter 2.8mm (.110)
Stripping Length 5mm (.197)



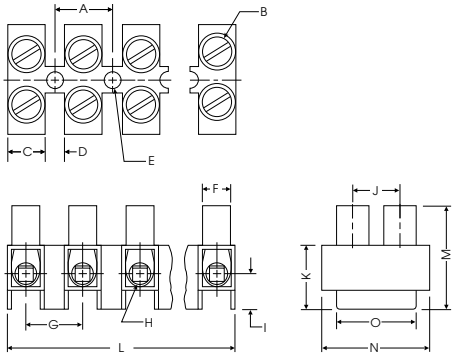

TSF2.5

Standoff Feet
Pole Spacing 10mm (.394)
Mounting Hole Diameter 3.5mm (.138)
Stripping Length 6mm (.236)

Ratings		Wire Range	Current	Voltage	Wire Range	Current	Voltage
IEC/VDE		1.5mm²	18A	380V	2.5mm²	26A	380V
(File No. E148805)		22-12 AWG	20A	600V	22-10 AWG	30A	600V
(File No. LR38962)		22-16 AWG	15A	300V	18-12 AWG	30A	600V

Ordering Information	No. of Poles	Type	Cat. No.	Length (L) mm (in.)	Std. Pk.	Type	Cat. No.	Length (L) mm (in.)	Std. Pk.
Eurostrip®, Standoff Feet with Wire Protector	**2**	TSF1.5/2wp	**40.102**	13.6 (.53)	100	TSF2.5/2wp	**40.302**	17.0 (.67)	100
	3	TSF1.5/3wp	**40.103**	21.5 (.85)	100	TSF2.5/3wp	**40.303**	27.0 (1.06)	100
	4	TSF1.5/4wp	**40.104**	29.5 (1.16)	100	TSF2.5/4wp	**40.304**	37.0 (1.46)	100
	5	TSF1.5/5wp	**40.105**	37.4 (1.47)	100	TSF2.5/5wp	**40.305**	47.0 (1.85)	100
	6	TSF1.5/6wp	**40.106**	45.4 (1.79)	50	TSF2.5/6wp	**40.306**	57.0 (2.24)	50
	7	TSF1.5/7wp	**40.107**	53.3 (2.10)	50	TSF2.5/7wp	**40.307**	67.0 (2.64)	50
	8	TSF1.5/8wp	**40.108**	61.3 (2.41)	50	TSF2.5/8wp	**40.308**	77.0 (3.03)	50
	9	TSF1.5/9wp	**40.109**	69.2 (2.72)	50	TSF2.5/9wp	**40.309**	87.0 (3.43)	50
	10	TSF1.5/10wp	**40.110**	77.2 (3.04)	50	TSF2.5/10wp	**40.310**	97.0 (3.82)	50
	11	TSF1.5/11wp	**40.111**	85.1 (3.35)	50	TSF2.5/11wp	**40.311**	107.0 (4.21)	50
	12	TSF1.5/12wp	**40.112**	93.0 (3.66)	50	TSF2.5/12wp	**40.312**	117.0 (4.61)	50
Eurostrip®, Standoff Feet without Wire Protector[b]	**2**	TSF1.5/2	**40.152**	13.6 (.53)	100	TSF2.5/2	**40.352**	17.0 (.67)	100
	3	TSF1.5/3	**40.153**	21.5 (.85)	100	TSF2.5/3	**40.353**	27.0 (1.06)	100
	4	TSF1.5/4	**40.154**	29.5 (1.16)	100	TSF2.5/4	**40.354**	37.0 (1.46)	100
	5	TSF1.5/5	**40.155**	37.4 (1.47)	100	TSF2.5/5	**40.355**	47.0 (1.85)	50
	6	TSF1.5/6	**40.156**	45.4 (1.79)	50	TSF2.5/6	**40.356**	57.0 (2.24)	50
	7	TSF1.5/7	**40.157**	53.3 (2.10)	50	TSF2.5/7	**40.357**	67.0 (2.64)	50
	8	TSF1.5/8	**40.158**	61.3 (2.41)	50	TSF2.5/8	**40.358**	77.0 (3.03)	50
	9	TSF1.5/9	**40.159**	69.2 (2.72)	50	TSF2.5/9	**40.359**	87.0 (3.43)	50
	10	TSF1.5/10	**40.160**	77.2 (3.04)	50	TSF2.5/10	**40.360**	97.0 (3.82)	50
	11	TSF1.5/11	**40.161**	85.1 (3.35)	50	TSF2.5/11	**40.361**	107.0 (4.21)	50
	12	TSF1.5/12	**40.162**	93.0 (3.66)	50	TSF2.5/12	**40.362**	117.0 (4.61)	50

For Accessories, please refer to pages 50, 51

Dimensions mm (in.)


A = 8.0 (.315)	E = Ø2.8 (.110)	J = 7.5 (.296)
B = M2.5 x 4.3	F = Ø5.35 (.211)	K = 10.1 (.398)
C = 5.6 (.221)	G = 8.0 (.315)	M = 17.0 (.670)
D = 2.4 (.095)	H = Ø3.0 (.118)	N = 18.2 (.716)
	I = 6.1 (.240)	O = 12.0 (.472)

Dimensions mm (in.)

A =10.0 (.394)	E = Ø3.5 (.138)	J= 9.5 (.374)
B = M3 x 5.8	F = Ø5.7 (.225)	K = 12.0 (.472)
C = 6.4 (.252)	G = 10.0 (.394)	M = 19.4 (.764)
D = 3.5 (.138)	H = Ø3.6 (.142)	N = 22.3 (.879)
	I = 7.4 (.292)	0 = 14.0 (.552)

[a]Clamp screws are zinc chromated steel. Stainless steel or nickle plated brass screws are available, consult Altech for ordering information.
[b]Use for solid wire or wire with a ferrule.



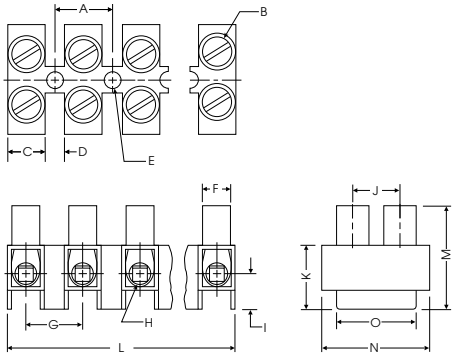

TSF6

Standoff Feet
Pole Spacing 12mm (.472)
Mounting Hole Diameter 4.2mm (.165)
Stripping Length 7mm (.276)


Wire Range	Current	Voltage
6mm²	44A	380V
20-8 AWG	40A	600V
18-10 AWG	40A	600V

Type	Cat. No.	Length (L) mm (in.)	Std. Pk.
TSF6/2wp	**40.502**	20.0 (.79)	100
TSF6/3wp	**40.503**	32.0 (1.26)	100
TSF6/4wp	**40.504**	44.0 (1.73)	100
TSF6/5wp	**40.505**	56.0 (2.21)	100
TSF6/6wp	**40.506**	68.0 (2.68)	50
TSF6/7wp	**40.507**	80.0 (3.15)	50
TSF6/8wp	**40.508**	92.0 (3.62)	50
TSF6/9wp	**40.509**	104.0 (4.10)	50
TSF6/10wp	**40.510**	116.0 (4.57)	25
TSF6/11wp	**40.511**	128.0 (5.03)	25
TSF6/12wp	**40.512**	140.0 (5.51)	25
TSF6/2	**40.552**	20.0 (.79)	100
TSF6/3	**40.553**	32.0 (1.26)	100
TSF6/4	**40.554**	44.0 (1.73)	100
TSF6/5	**40.555**	56.0 (2.21)	100
TSF6/6	**40.556**	68.0 (2.68)	50
TSF6/7	**40.557**	80.0 (3.15)	50
TSF6/8	**40.558**	92.0 (3.62)	50
TSF6/9	**40.559**	104.0 (4.10)	50
TSF6/10	**40.560**	116.0 (4.57)	25
TSF6/11	**40.561**	128.0 (5.03)	25
TSF6/12	**40.562**	140.0 (5.51)	25

Dimensions mm (in.)

A =12.0 (.472)	E = Ø4.4 (.173)	J = 9.6 (.378)
B = M3.5 x 7	F = Ø6.8 (.268)	K = 12.5 (.492)
C = 7.6 (.299)	G = 12.0 (.472)	M = 20.9 (.823)
D = 4.3 (.169)	H = 4.2 (.165)	N = 23.0 (.906)
	I = 8.5 (.335)	O = 15.8 (.622)



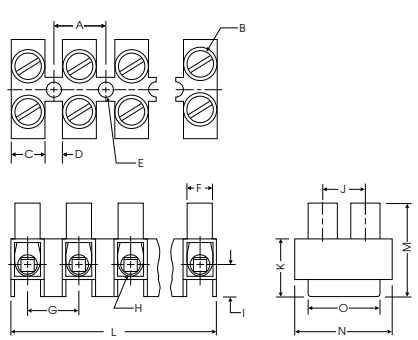

TSF16

Standoff Feet
Pole Spacing 15.1mm (.595)
Mounting Hole Diameter 4.0mm (.157)
Stripping Length 8mm (.315)

Wire Range	Current	Voltage
16mm²	82A	660V
14-6 AWG	63A	600V
18-6 AWG	65A	600V

Type	Cat. No.	Length (L) mm (in.)	Std. Pk.
TSF16/2wp	**40.702**	25.0 (.98)	40
TSF16/3wp	**40.703**	40.0 (1.58)	40
TSF16/4wp	**40.704**	55.0 (2.17)	40
TSF16/5wp	**40.705**	70.5 (2.28)	40
TSF16/6wp	**40.706**	86.0 (3.39)	20
TSF16/7wp	**40.707**	101.0 (3.98)	20
TSF16/8wp	**40.708**	116.0 (4.57)	20
TSF16/9wp	**40.709**	131.0 (5.16)	10
TSF16/10wp	**40.710**	146.0 (5.75)	10
TSF16/11wp	**40.711**	161.0 (6.34)	10
TSF16/12wp	**40.712**	176.0 (6.93)	10
TSF16/2	**40.752**	25.0 (.98)	40
TSF16/3	**40.753**	40.0 (1.58)	40
TSF16/4	**40.754**	55.0 (2.17)	40
TSF16/5	**40.755**	70.5 (2.28)	40
TSF16/6	**40.756**	86.0 (3.39)	20
TSF16/7	**40.757**	101.0 (3.98)	20
TSF16/8	**40.758**	116.0 (4.57)	20
TSF16/9	**40.759**	131.0 (5.16)	10
TSF16/10	**40.760**	146.0 (5.75)	10
TSF16/11	**40.761**	161.0 (6.34)	10
TSF16/12	**40.762**	176.0 (6.93)	10

Dimensions mm (in.)

A =15.1 (.595)	E = Ø4.2 (.165)	J = 11.0 (.433)
B = M5 x 8	F = Ø8.0 (.315)	K = 16.5 (.650)
C = 9.6 (.378)	G = 15.1 (.595)	M = 25.8 (1.017)
D = 5.4 (.213)	H = Ø6.0 (.236)	N = 26.3 (1.035)
	I = 10.4 (.410)	0 = 15.1 (.595)

PLUGGABLE EUROSTRIPS®
300 V - Panel Mount


For wire-to-wire connections in HVAC, appliance, equipment, power and other distribution applications. Pluggable Eurostrips® speed and simplify replacement of subassemblies, etc. They reduce downtime and misconnections.

Two-piece pluggable terminal strips feature tubular screw clamps, with or without wire protectors, and recessed metal parts for finger protection. A spring loaded contact prevents inadvertant unplugging.

The headers and plugs have standoff feet for increased accessibility and can be panel mounted or free float. Offered in easy to cut 12 pole strips, they can also be ordered precut with the required number of poles.

- Tubular Screw Clamp
- Copper Alloy Wire Protectors
- Panel Mount or Free Float
- Housing Material: Polyamide 6.6
- Color: Opaque White




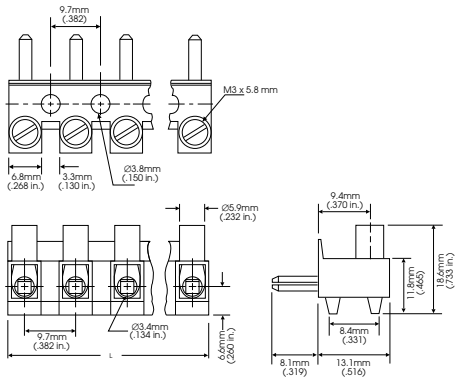

TSP2.5
PLUG

Standoff Feet
Pole Spacing 10mm (.394)
Mounting Hole Diameter 3.5mm (.138)
Stripping Length 6mm (.236)



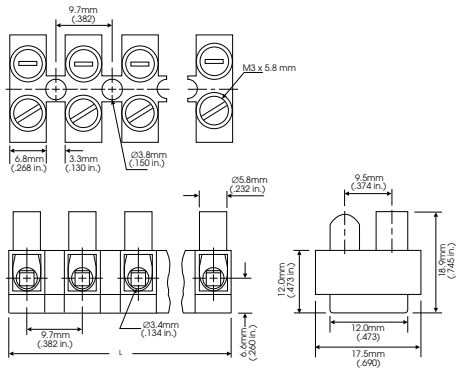

TSH2.5
HEADER

Standoff Feet
Pole Spacing 10mm (.394)
Mounting Hole Diameter 3.5mm (.138)
Stripping Length 6mm (.236)

Ratings	Wire Range	Current	Voltage	Wire Range	Current	Voltage
IEC/VDE	2.5mm²	16A	380V	2.5mm²	16A	380V
(File No. E103245)	20-12 AWG	13A	300V	20-12 AWG	13A	300V

Ordering Information	No. of Poles	Type	Cat. No.	Length (L) mm (in.)	Std. Pk.	Type	Cat. No.	Length (L) mm (in.)	Std. Pk.
Eurostrip® Plug with Wire Protector	**2**	TSP2.5/2wp	**40.802**	17.0 (.67)	50	TSH2.5/2wp	**40.902**	17.0 (.67)	50
	3	TSP2.5/3wp	**40.803**	27.0 (1.06)	50	TSH2.5/3wp	**40.903**	27.0 (1.06)	50
	4	TSP2.5/4wp	**40.804**	37.0 (1.46)	50	TSH2.5/4wp	**40.904**	37.0 (1.46)	50
Eurostrip® Header with Wire Protector	**5**	TSP2.5/5wp	**40.805**	47.0 (1.85)	50	TSH2.5/5wp	**40.905**	47.0 (1.85)	50
	6	TSP2.5/6wp	**40.806**	57.0 (2.24)	25	TSH2.5/6wp	**40.906**	57.0 (2.24)	25
	7	TSP2.5/7wp	**40.807**	67.0 (2.64)	25	TSH2.5/7wp	**40.907**	67.0 (2.64)	25
	8	TSP2.5/8wp	**40.808**	77.0 (3.03)	25	TSH2.5/8wp	**40.908**	77.0 (3.03)	25
	9	TSP2.5/9wp	**40.809**	87.0 (3.43)	25	TSH2.5/9wp	**40.909**	87.0 (3.43)	25
	10	TSP2.5/10wp	**40.810**	97.0 (3.82)	10	TSH2.5/10wp	**40.910**	97.0 (3.82)	10
	11	TSP2.5/11wp	**40.811**	107.0 (4.21)	10	TSH2.5/11wp	**40.911**	107.0 (4.21)	10
	12	TSP2.5/12wp	**40.812**	117.0 (4.61)	10	TSH2.5/12wp	**40.912**	117.0 (4.61)	10
Eurostrip® Plug without Wire Protector[a]	**2**	TSP2.5/2	**40.852**	17.0 (.67)	50	TSH2.5/2	**40.952**	17.0 (.67)	50
	3	TSP2.5/3	**40.853**	27.0 (1.06)	50	TSH2.5/3	**40.953**	27.0 (1.06)	50
	4	TSP2.5/4	**40.854**	37.0 (1.46)	50	TSH2.5/4	**40.954**	37.0 (1.46)	50
Eurostrip® Header without Wire Protector	**5**	TSP2.5/5	**40.855**	47.0 (1.85)	50	TSH2.5/5	**40.955**	47.0 (1.85)	50
	6	TSP2.5/6	**40.856**	57.0 (2.24)	25	TSH2.5/6	**40.956**	57.0 (2.24)	25
	7	TSP2.5/7	**40.857**	67.0 (2.64)	25	TSH2.5/7	**40.957**	67.0 (2.64)	25
	8	TSP2.5/8	**40.858**	77.0 (3.03)	25	TSH2.5/8	**40.958**	77.0 (3.03)	25
	9	TSP2.5/9	**40.859**	87.0 (3.43)	25	TSH2.5/9	**40.959**	87.0 (3.43)	25
	10	TSP2.5/10	**40.860**	97.0 (3.82)	10	TSH2.5/10	**40.960**	97.0 (3.82)	10
	11	TSP2.5/11	**40.861**	107.0 (4.21)	10	TSH2.5/11	**40.961**	107.0 (4.21)	10
	12	TSP2.5/12	**40.862**	117.0 (4.61)	10	TSH2.5/12	**40.962**	117.0 (4.61)	10



[a]Use for solid wire or wire with a ferrule.

EUROSTRIP® ACCESSORIES

Convenient options that facilitate installation and wire termination.

EXTERNAL JUMPERS

Bus potentials between poles on Eurostrip® Terminal Strips reducing wiring time and eliminating wire jumpers.
Jumper Pole positions may be removed to provide selective jumpering. When using external jumpers, the terminal's rated cross section is usually reduced one wire size. For Jumper maximum current ratings, refer to the corresponding Eurostrip® IEC/VDE current rating.
Material: Metal-Copper Alloy, Nickel Plate
Insulation: Polyamide 6.6
Color: Black.

ISOLATION PARTITIONS

Isolation Partition KA provides separation between adjacent poles of different potentials on 600V Eurostrips® with standoff feet. Visual separation between poles is also provided by an Isolation Partition, assisting circuit identification and increasing wiring efficiency.
Material: Polyamide 6.6; Color: Black.

MOUNTING PINS

Speed panel mounting of Eurostrips® with AH Mounting Pins. Simply match drill clearance hole in panel, position Eurostrip® and install Mounting Pin through hole and into mounting hole in Eurostrip® housing. Once pin passes beyond Eurostrip® housing, it automatically expands, securing housing to panel. Use two or more Mounting Pins per Eurostrip®.
Material: Polyacetal; Color: AH46 Black, AH 16 Gray

MARKING PLATES

Install Marking Plate MP under or on top of Eurostrip® housing to identify individual pole positions to increase wiring efficiency, save installation time and facilitate wire hook-up, system modification and trouble shooting. Select blank Marking Plate for hand marking or imprinted. Material: Self-extinguishing PVC; Color: White with Black Imprint.

IMPRINTING

Mark individual pole positions to save installation time and facilitate wire hook-up, system modification and trouble shooting. Choose turret or ledge marking for optimum identification. To order Imprinting specify consecutive, identical or custom character imprints; and marking location - Turret (T) or Ledge (L). Imprints: Rub-Resistant, Black Ink.

See examples on facing pages.



EQ EXTERNAL JUMPERS

Type	Cat. No.	No. of Poles[a], Pole Spacing	Use With Types
EQ1.5/2	**41.442**	2 pole, 8mm (.315)	TS1.5, TSF1.5
EQ1.5/3	**41.443**	3 pole, 8mm (.315)	
EQ1.5/4	**41.444**	4 pole, 8mm (.315)	
EQ1.5/12	**41.452**	12 pole, 8mm (.315)	
EQ2.5/2	**41.462**	2 pole, 10mm (.394)	TS2.5, TSF2.5, TSP2.5, TSH2.5
EQ2.5/3	**41.463**	3 pole, 10mm (.394)	
EQ2.5/4	**41.464**	4 pole, 10mm (.394)	
EQ2.5/12	**41.472**	12 pole, 10mm (.394)	
EQ6/2	**41.482**	2 pole, 12mm (.472)	TS6.0, TSF6.0
EQ6/3	**41.483**	3 pole, 12mm (.472)	
EQ6/4	**41.484**	4 pole, 12mm (.472)	
EQ6/12	**41.492**	12 pole, 12mm (.472)	
EQ16/2	**41.502**	2 pole, 15mm (.591)	TSF16
EQ16/3	**41.503**	3 pole, 15mm (.591)	
EQ16/4	**41.504**	4 pole, 15mm (.591)	
EQ16/12	**41.512**	12pole, 15mm (.591)	

Std. Pk.: 2 pole - 20
3 pole - 20
4 pole - 20
12 pole - 5


[a]Other pole positions available, consult Altech.




KA ISOLATION PARTITION

Type	Cat. No.	Thickness mm (in.)	Use With Types
KA46	**41.410**	3.4 (.134)	TSF2.5, TSF6

Std. Pk.: 5






AH
MOUNTING PINS

Type	Cat. No.	Panel Thickness mm (in.)	Use With Types
AH46	**41.420**	0.8 - 1.7 (.031-.067)	TSF2.5 TSF6
AH16	**41.421**	1.0 - 2.1 (.039 - .083)	TSF16

Std. Pk.: 50

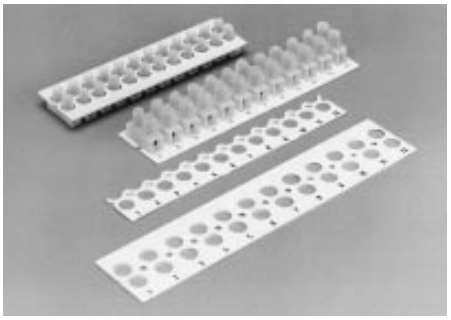

MP
MARKING PLATES

Type	Cat. No.	Description*	Use With Types
MPB2.5	**41.200**	Blank	TS2.5, TSF2.5
MPB6	**41.400**	Blank	TS6, TSF6
MPB10	**41.600**	Blank	TSF16
MPI2.5	**41.201**	Consecutive Nos. 1 - 12	TS2.5, TSF2.5
MPI6	**41.401**	Consecutive Nos. 1 - 12	TS6, TSF6
MPI10	**41.601**	Consecutive Nos. 1 - 12	TSF16
MPI2.5	**41.202**	Consecutive Nos. 13 - 24	TS2.5, TSF2.5
MPI6	**41.402**	Consecutive Nos. 13 - 24	TS6, TSF6
MPI10	**41.602**	Consecutive Nos. 13 - 24	TSF16

Std. Pk.: 25



Ledge Location



Turret Location

IMPRINTING


Type	Cat. No.

The following are listed as examples:

TS1.5/12wp-i(1-12)T **40.012i(1-12)T**
Marking Instruction: Consecutive, imprint 1 through 12, Turret Location

TS2.5/12wp-i(1)L **40.212i(1)L**
Marking Instruction: Identical, imprint 1, Ledge Location

Std. Pk.: 1000

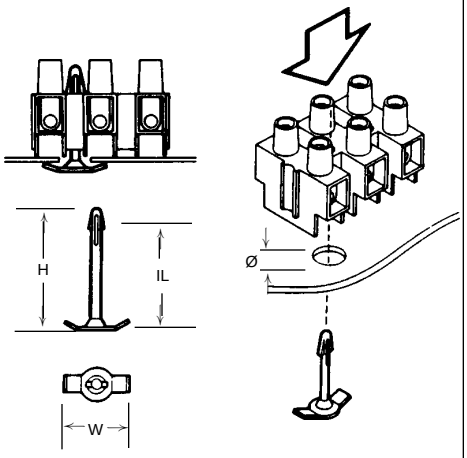

Dimensions mm (in.)				
Mounting Pin Type	**Pin Height (H)**	**Insertion* Length (IL)**	**Panel Hole Dia.**	**Width (W)**
AH46	21.5 (.85)	14.5 (.57)	4.5 (.18)	13.0 (.51)
AH16	24.5 (.96)	19.0 (.75)	5.5 (.22)	13.0 (.51)

*Eurostrip® housing thickness and panel thickness.

* Custom Imprints available, please consult Altech

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Altech:

40.002 40.004 40.012 40.212 40.312 40.412 40.512 40.402 40.403 40.502