

PQ1Kxx3M2ZP Series

Low Output Current, Compact Surface Mount Type Low Power-Loss Voltage Regulators

■ Features


- Compact surface mount package SOT-23L (3.4×2.2×1.2 mm)
- Output current : MAX.300mA
- Low power-loss
(Dropout voltage : MAX.0.7 V at $I_o=300\text{mA}$)
- High ripple rejection (TYP. 70dB)
- Built-in ON/OFF control function

■ Applications

- CD-ROM drives/DVD-ROM drives
- Digital Still Cameras

■ Outline Dimensions

(Unit : mm)

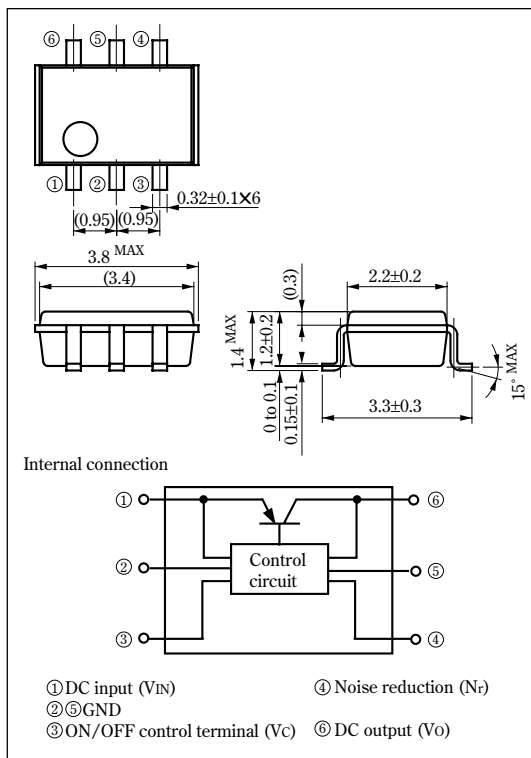

■ Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{in}	9	V
*1 ON/OFF control terminal voltage	V_c	9	V
Output current	I_o	300	mA
*2 Power dissipation	P_D	400	mW
*3 Junction temperature	T_j	150	$^\circ\text{C}$
Operating temperature	T_{opr}	-30 to +80	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$
Soldering temperature	T_{sol}	260(For 10s)	$^\circ\text{C}$

*1 All are open except GND and applicable terminals.

*2 At mounted on PCB

*3 Overheat protection may operate at $125 \leq T_j \leq 150^\circ\text{C}$.

•Please refer to the chapter " Handling Precautions ".

SHARP

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
 Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

■ Electrical Characteristics

(Unless otherwise specified, $V_{in}=V_o(TYP.)+1.0V$, $I_o=30mA$, $V_c=1.8V$, $T_a=25^{\circ}C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	V _O	—	Refer to the table below			V
Load regulation	RegL	I _O =5mA to 300mA	—	35	160	mV
Line regulation	RegI	V _{IN} =V _O (TYP.)+1V to V _O (TYP.)+6V (MAX. 9V)	—	3.0	20	mV
Temperature coefficient of output voltage	TcV _O	I _O =10mA, T _J =–25 to +75°C	—	0.05	—	mV/°C
⊗4 Ripple rejection	RR	—	—	70	—	dB
⊗4 Output noise voltage	V _{no(rms)}	10Hz<f<100kHz, I _O =30mA, C _n =0.1μF	—	30	—	μV
Dropout voltage	V _{I-O}	I _O =300mA, ⊗5	—	—	0.7	V
⊗6 ON-state voltage for control	V _{c(on)}	—	1.8	—	—	V
ON-state current for control	I _{c(on)}	V _c =1.8V	—	5	30	μA
OFF-state voltage for control	V _{c(off)}	—	—	—	0.4	V
Quiescent current	I _q	I _O =0mA	—	—	500	μA
Output OFF-state dissipation current	I _{qs}	V _c =0.2V	—	—	1	μA

*4 Typical value at output voltage is 3.0V type.

*5 Input voltage when output voltage lowers 100m V from the voltage at $V_{in}=V_o(TYP.)+1.0V$.

*6 In case of opening control terminal ③, output voltage turns off.

■ Output Voltage Line-up

($V_{IN}=V_o(TYP.)+1.0V, I_o=30mA, V_c=1.8V, T_a=25^{\circ}C$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
⑦ Output voltage	PQ1K183M2ZP	Vo	—	1.740	1.8	1.860	V
	PQ1K213M2ZP			2.040	2.1	2.160	
	PQ1K253M2ZP			2.440	2.5	2.560	
	PQ1K303M2ZP			2.940	3.0	3.060	
	PQ1K333M2ZP			3.234	3.3	3.366	
	PQ1K343M2ZP			3.332	3.4	3.468	
	PQ1K503M2ZP			4.900	5.0	5.100	

✱7 It is available for every 0.1V (1.3V to 5V)

Fig.1 Test Circuit

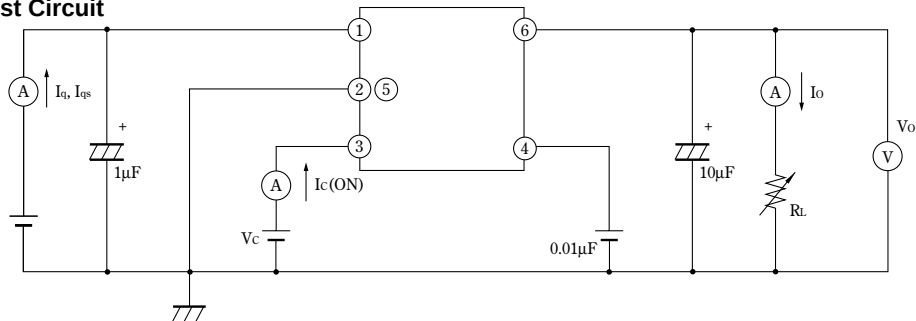


Fig.2 Test Circuit for Ripple Rejection


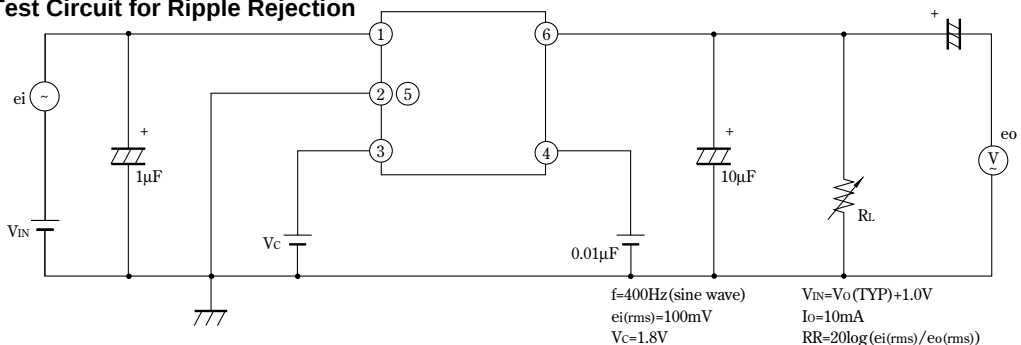


Fig.3 Power Dissipation vs. Ambient Temperature

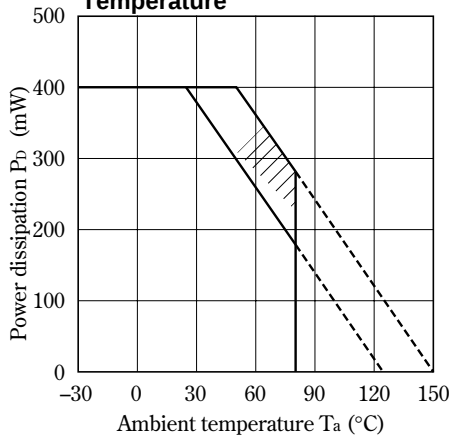

Note) Oblique line portion: Overheat protection may operate in this area.

Fig.5 Output Voltage Fluctuation vs. Junction Temperature (PQ1K333M2ZP) (Typical Value)

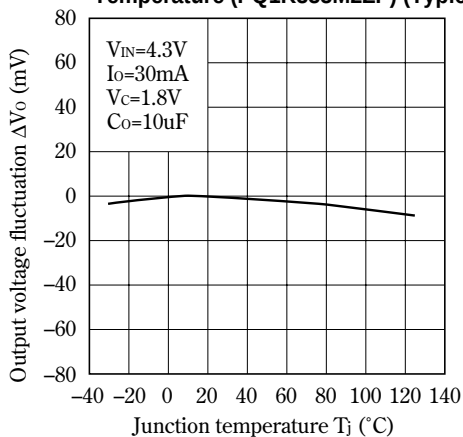


Fig.7 Circuit Operating Current vs. Input Voltage (PQ1K333M2ZP) (Typical Value)

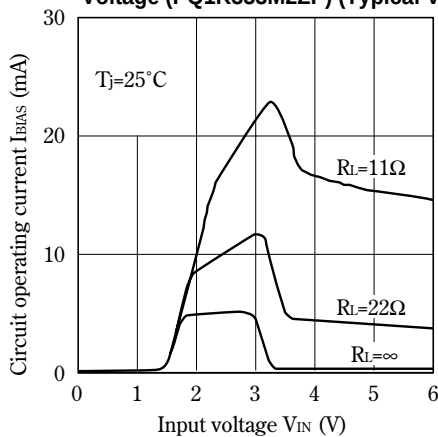


Fig.4 Overcurrent Protection Characteristics (Typical Value)

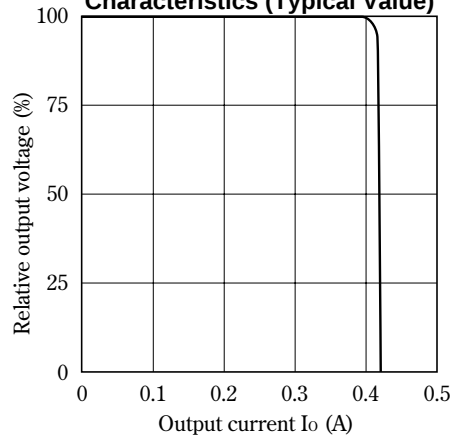


Fig.6 Output Voltage vs. Input Voltage (PQ1K333M2ZP) (Typical Value)

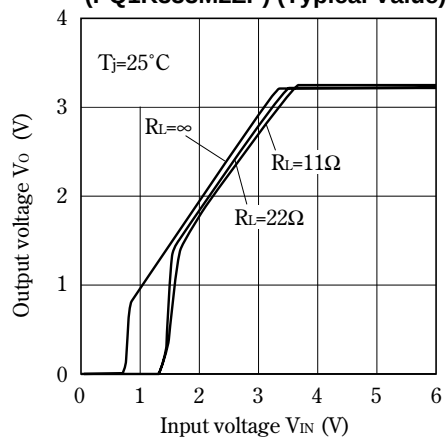


Fig.8 Dropout Voltage vs. Junction Temperature (Typical Value)

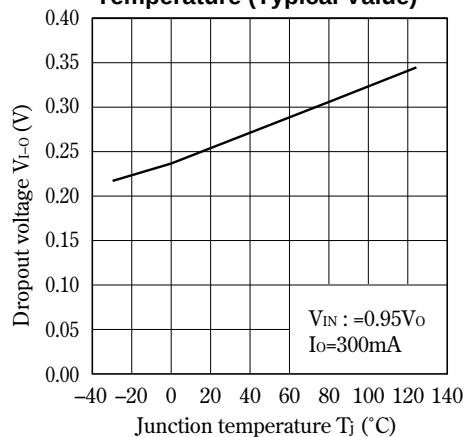


Fig.9 Quiescent Current vs. Junction Temperature

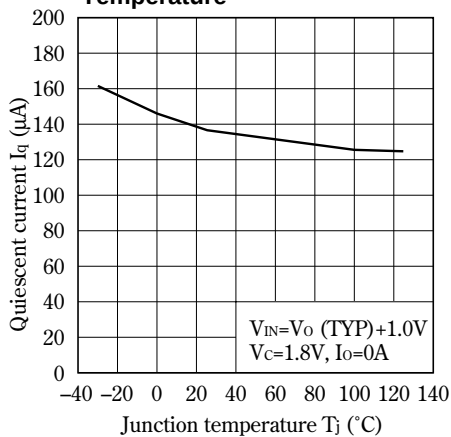


Fig.10 Ripple Rejection vs. Input Ripple Frequency (PQ1K333M2ZP) (Typical Value)

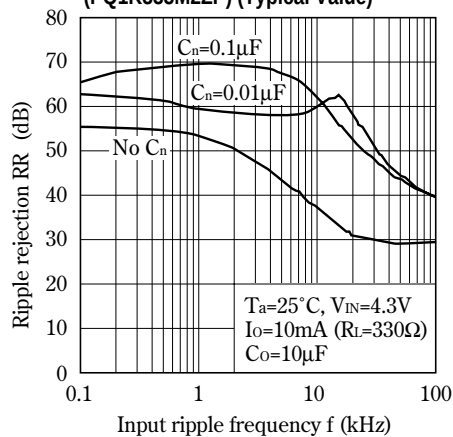


Fig.11 Dropout Voltage vs. Output Current (PQ1K333M2ZP) (Typical Value)



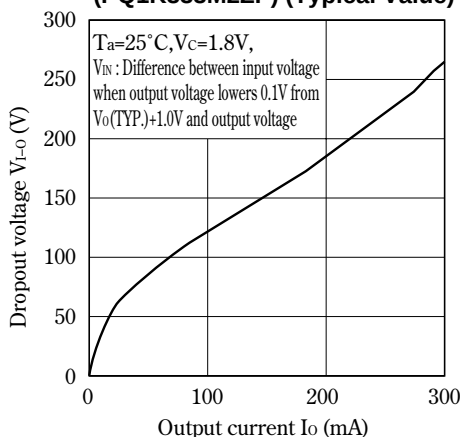


Fig.12 Output Peak Current vs. Junction Temperature (Typical Value)

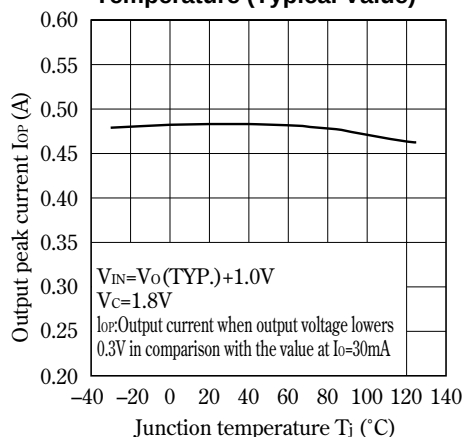

ON/OFF Operation

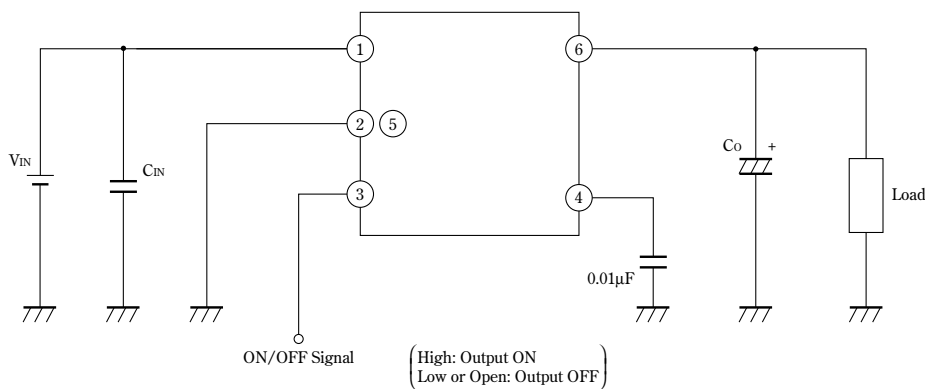

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.