


## SPC560D-DIS Discovery evaluation board

Data brief - production data

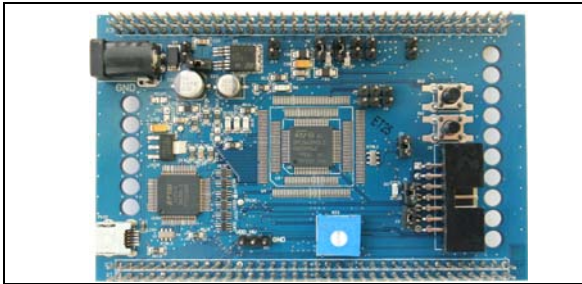

### Features

- SPC560D40L1 32-bit 48 MHz e200z0h CPU, 32-bit Power Architecture® Technology CPU, 256 KB Code Flash in an LQFP64 package.
- On-board USB-JTAG PLS debugger and HW selection mode to use stand-alone JTAG debuggers.
- Board power supply: through external +12 V PSU or from the USB bus (5 V supply voltage).
- Seven LEDs: D6 for 5 V power on, D2 for Reset, D101, D102, D103 for PLS debugger section, D7 and D8 for PC3 and PC2 outputs (for user)
- Two push buttons (reset and user)
- A potentiometers for ADC input (user)
- Two extension headers (2 x 36 pin - 100 mil) for all LQFP64 pins and for quick connection to prototyping boards, additional modules and easy probing.
- JTAG interface (2 x 7 male 100 mil connector)
- USB port (mini -B)
- 16 MHz crystal
- Specification:
  - Board size 100 x 55 mm
  - MCU: SPC560D40L1 - LQFP64
  - 2 extension headers 2 x 36 pin - 100 mil
  - DC connector (+12 V input)
  - Mini USB - B
  - JTAG 2 x 7 - 100 mil connector

### Description

The SPC560D-DIS Discovery is a low cost and quick way to discover SPC56 D line.

Based on SPC56D40L1, the discovery board includes a JTAG debugger from PLS, LEDs, push buttons and extension headers to connect prototyping boards or additional modules.

PLS UDE software is available for free download and includes a perpetual 128 Kbyte debugging/programming license.

Free ready-to-run application firmware examples are available inside SPC5Studio to support quick evaluation and development.

SPC5Studio includes visual configurable code generation engine, board support package (BSP), startup routines, interrupt services, free RTOS (optional) and a full set of low level drivers. SPC5Studio includes HighTec GNU "C" compiler, with a 30-days full free trial support. SPC5Studio is available for free download.

The SPC56 D line is designed to address the specific need of entry level car body applications but as well many other markets where high temperature operation, high reliability, low power stand-by operation with quick wake up and real-time loads diagnostic are required. An E2E Community is available on ST WEB to get ST experts support in getting started quickly with SPC56 microcontrollers.

**Table 1. Device summary**

Order code	Reference
SPC560D-DIS	SPC56D-Discovery with SPC560D40L1

# 1 System requirements, HW and SW resources

## 1.1 System requirements

- Windows PC (2000, XP, Vista)
- USB type A to mini-B cable

## 1.2 Development toolchain

- SPC5Studio (includes Hightec GNU "C" compiler, with a 30-days full free trial support)

## 1.3 Demonstration software

Demonstration software is preloaded in the MCU flash memory for easy demonstration of the SPC560D40L1 in stand-alone mode. For more information and to download the latest version available, please refer to ST web.

## 2 Revision history

**Table 2. Revision history**

<b>Date</b>	<b>Revision</b>	<b>Changes</b>
04-Oct-2013	1	Initial release.
19-Mar-2014	2	Updated Description.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)