



# Series 508 Open Frame Capacitor Collet Sockets with Wire Wrap Pins

## FEATURES:

- Capacitor bypasses unwanted electromagnetic "noise."
- Available with either .1μF or .33μF capacitor, 50V, Z5U temperature coefficient.
- Open frame allows for more efficient utilization of board space and better cooling.
- Compatible with automatic insertion equipment.
- Side-to-side and end-to-end stackable.

## SPECIFICATIONS:

- Body material is black UL 94V-0 Glass-filled 4/6 Nylon.
- Pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- Pin body plating is either 10μ [2.5μm] min. Gold per MIL-G-45204 or 200μ [5.08μm] min. 93/7 Tin/Lead per ASTM B545 or 200μ [5.08μm] min. Tin per ASTM B545 Type 1 over 100μ [2.54μm] min. Nickel per SAE-AMS-QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-01.
- Contact plating is 30μ [7.6μm] min. Gold per MIL-G-45204 over 50μ [1.27μm] min. Nickel per SAE-AMS-QQ-N-290.
- Contact current rating=3 Amps.
- Operating Temp. = -67°F to 221°F [-55°C to 105°C] Tin = -67°F to 257°F [-55°C to 125°C] Gold
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [.46] dia. test lead.
- Accepts leads .015-.025 [.38-.64] in diameter.
- Accepts lead lengths from .100 [2.54] min.

## MOUNTING CONSIDERATIONS:


- Suggested PCB hole size=.045 ± .002 [1.14 ± .05] dia.



Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

## ORDERING INFORMATION

**XX-X508-XXXXX**

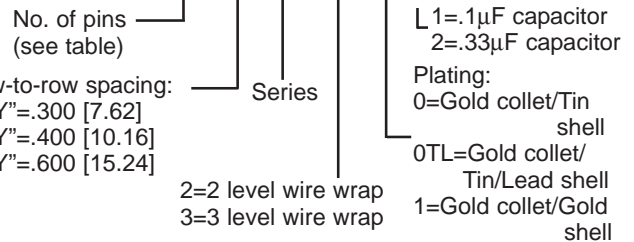

## ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13] unless otherwise specified


"W"=(NO. OF PINS PER ROW) X .100 [2.54]

"X"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

Frame Style	No of Ribs	Centers "Y"	Dim "Z"	Available Sizes
B	2	.300 [7.62]	.400 [10.16]	14, 16, 18, 20
		.400 [10.16]	.500 [12.70]	20, 22, 24
C	3	.300 [7.62]	.400 [10.16]	24, 28
		.600 [15.24]	.700 [17.78]	24, 28, 32, 40

STYLE B (2 RIB)

STYLE C (3 RIB)

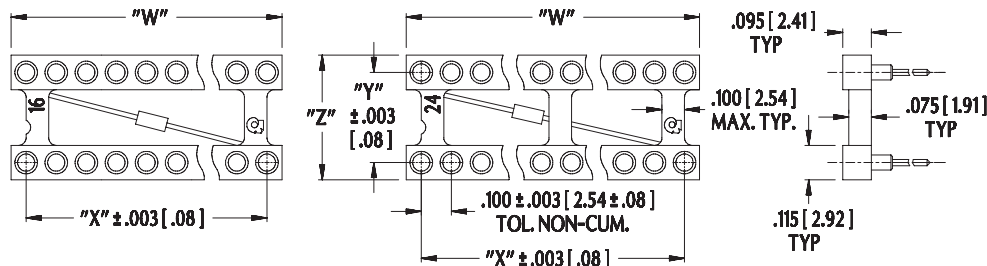

Consult Data Sheet No. 12026 for solder tail pins

Consult Data Sheets 12016 and 12017 for Open Frame Sockets w/out capacitor.

**ARIES**  
 ELECTRONICS, INC.  
<http://www.arieselec.com> • [info@arieselec.com](mailto:info@arieselec.com)

NORTH AMERICA  
 Frenchtown, NJ USA  
 TEL: (908) 996-6841  
 FAX: (908) 996-3891



EUROPE  
 TEL: +44 870 240 0249  
 FAX: +44 871 919 6033  
[europa@arieselec.com](mailto:europa@arieselec.com)



12027  
 REV.D