

# Customer Information Sheet

DRAWING No.: D73064-XX

SHEET 2 OF 2



IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

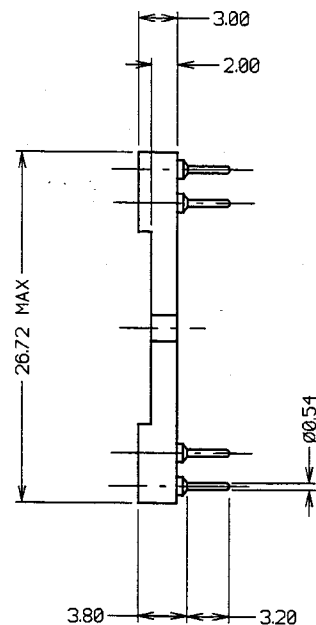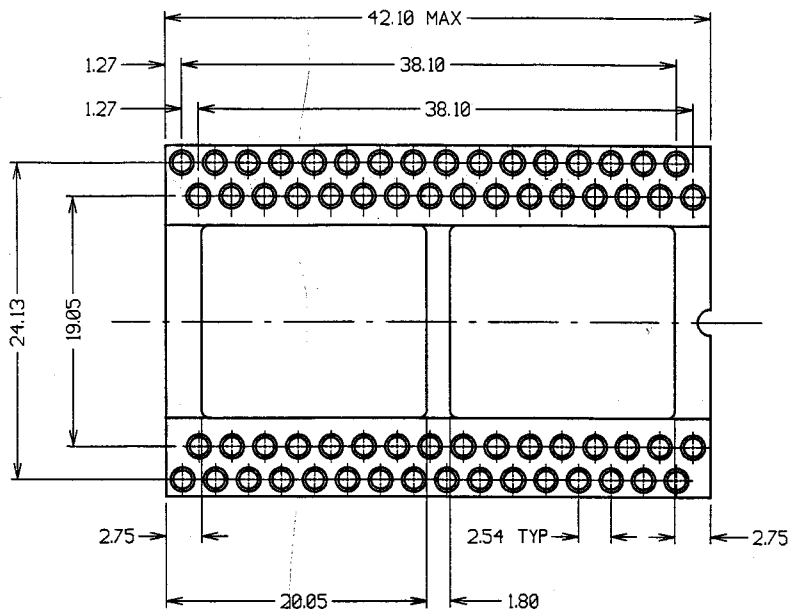

**SPECIFICATION:**

**MATERIAL:**

MOULDING - GLASS-FILLED POLYESTER UL94V-0

CONTACT SHELL - BRASS

CONTACT CLIP - BERYLLIUM COPPER

**FINISH:**

01 - 0.1μ GOLD CLIP, 4μ TIN SHELL

05 - 0.1μ GOLD CLIP, 0.13μ GOLD SHELL

T6 - 1.3μ 90/10 TIN/LEAD CLIP, 4μ TIN SHELL

21 - GOLD FLASH CLIP, 4μ TIN SHELL

**ELECTRICAL:**

CURRENT RATING - 1 AMP MAX

VOLTAGE RATING - 100V AC, 150V DC

CONTACT RESISTANCE - 10 MILLIOHMS MAX

INSULATION RESISTANCE - 10,000 MEGOHMS MIN

DIELECTRIC STRENGTH - 1,000V AC MIN

**MECHANICAL:**

INITIAL INSERTION FORCE - 3N MAX (0.43mm GAUGE)

INITIAL WITHDRAWAL FORCE - 0.5N MIN (0.43mm GAUGE)

DURABILITY - 100 CYCLES MIN

**ENVIRONMENTAL:**

OPERATING TEMPERATURE - -55°C TO +125°C

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C004XX (LATEST ISSUE).

ORDER CODE:

**D73064-XX**

FINISH

01 - GOLD CLIP, TIN SHELL

05 - GOLD CLIP, GOLD SHELL

T6 - 90/10 TIN/LEAD CLIP, TIN SHELL

21 - GOLD FLASH CLIP, TIN SHELL

4	05.01.00	5129
ISS:	DATE	C/NOTE
APPROVED:	<i>[Signature]</i>	
CHECKED:	<i>[Signature]</i>	
DRAWN:	J. KEIR	
CUSTOMER REF.:		
ASSEMBLY ORG.:		

**NOTES:**

1. RECOMMENDED MOUNTING HOLE SIZE = 0.80mm.

<b>HARWIN</b>			THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.	TOLERANCES X. = ±1mm X.X = ±0.25mm X.XX = ±0.10mm X.XXX = ±0.01mm ANGLES = ±1° UNLESS STATED	MATERIAL: SEE ABOVE	TITLE: 64-WAY QUAD IN LINE I.C. ASSEMBLY
HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0056	HARWIN PLC U.K. TEL: 01705 370451 FAX: 01705 314590	HARWIN PTE SINGAPORE TEL: 65 7794909 FAX: 65 7793868				