



	CPC1916Y	Units
Blocking Voltage	100	$V_p$
Load Current	2.5	$A_{rms}$
On-resistance	0.34	$\Omega$

#### Features

- Power SIP Package
- Handle Load Currents Up to  $2.5A_{rms}$
- High Reliability
- No Moving Parts
- Low Drive Power Requirements (TTL/CMOS Compatible)
- Arc-Free With No Snubbing Circuits
- $2500V_{rms}$  Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable

#### Applications

- Industrial Controls
- Motor Control
- Robotics
- Medical Equipment—Patient/Equipment Isolation
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- IC Equipment
- Home Appliances

#### Description


Clare and IXYS have combined to bring OptoMOS technology, reliability and compact size to a new family of high power solid state relays. As part of that family, the CPC1916Y is a 1-Form-A solid state relay. The CPC1916Y employs optically coupled MOSFET technology to provide  $2500V_{rms}$  of input to output isolation. The efficient MOSFET switches and photovoltaic die use Clare's patented OptoMOS architecture while the input is controlled by a highly efficient GaAlAs infrared LED. The combination of low on resistance and high load current handling capabilities makes the relay suitable for a variety of high performance switching applications.

#### Ordering Information


Part #	Description
CPC1916Y	Power SIP Package, 25 per tube

#### Pin Configuration

CPC1916Y Pinout



Switching Characteristics of Normally Open (Form A) Devices



### Absolute Maximum Ratings (@ 25° C)

Parameter	Ratings	Units
Blocking Voltage	100	$V_p$
Reverse Input Voltage	5	V
Input Control Current	50	mA
Peak (10ms)	1	A
Input Power Dissipation <sup>1</sup>	150	mW
Isolation Voltage Input to Output	2500	$V_{rms}$
Operational Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C
Soldering Temperature (10 Seconds Max.)	+260	°C

<sup>1</sup> Derate Linearly 3.33 mw / °C













Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

### Electrical Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Units
<b>Output Characteristics @ 25°C</b>						
Load Current	Continuous free air	$I_L$	-	-	2.5	$A_{rms}$
Peak Load Current	$t \leq 10ms$	$I_{LPK}$	-	-	6	$A_{rms}$
On-Resistance <sup>1</sup>	$I_L = 1.0A$	$R_{ON}$	-	-	0.34	$\Omega$
Off-State Leakage Current	$V_L = 100V$	$I_{LEAK}$	-	-	1	$\mu A$
Switching Speeds						
Turn-On	$I_F = 10mA, V_L = 10V$	$T_{ON}$	-	-	5	ms
Turn-Off	$I_F = 10mA, V_L = 10V$	$T_{OFF}$	-	-	3	ms
<b>Input Characteristics @ 25°C</b>						
Input Control Current	$I_L = 1.0A$	$I_F$	10	-	-	mA
Input Dropout Current	-	$I_F$	0.3	-	-	mA
Input Voltage Drop	$I_F = 5mA$	$V_F$	0.9	1.2	1.4	V
Reverse Input Current	$V_R = 5V$	$I_R$	-	-	10	$\mu A$
<b>Common Characteristics @ 25°C</b>						
Capacitance Input to Output	-	-	-	2	-	pF
<b>Thermal Characteristics @ 25°C</b>						
Thermal Resistance (junction to case)	-	$R_{\theta JC}$	-	1.5	-	°C/W






<sup>1</sup> Measurement taken within 1 second of on time.

**PERFORMANCE DATA\***

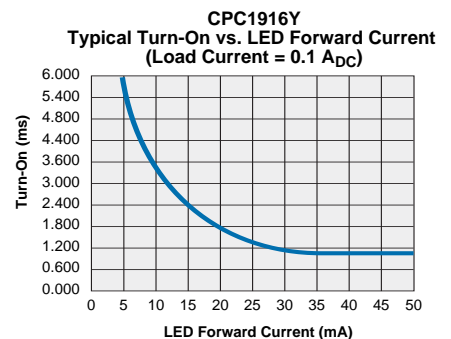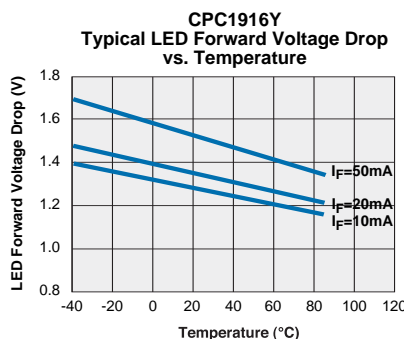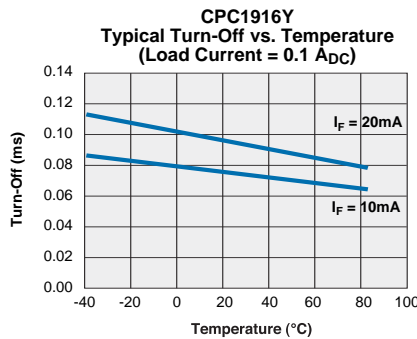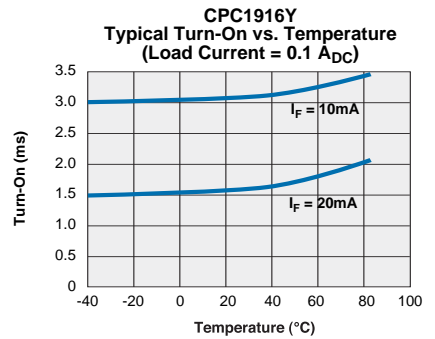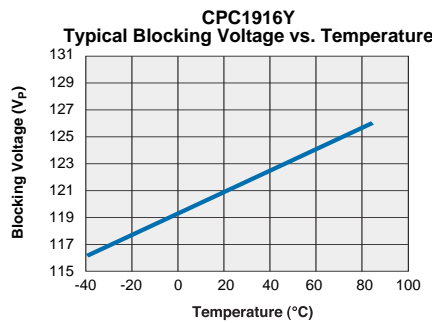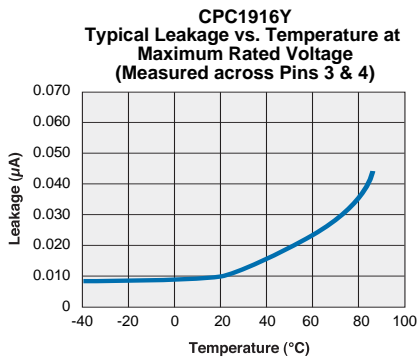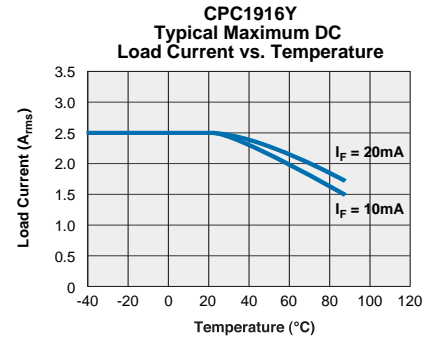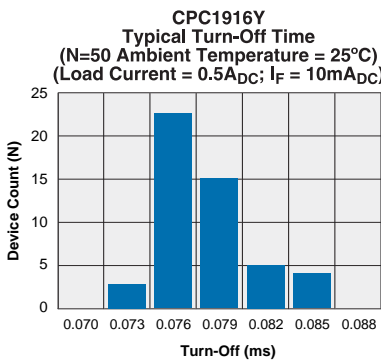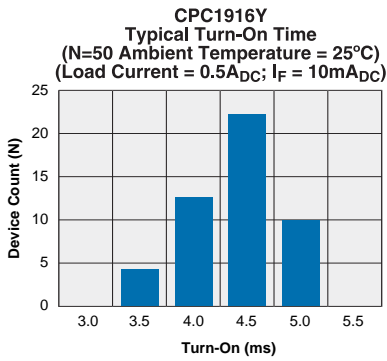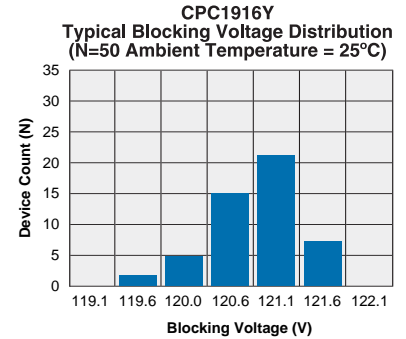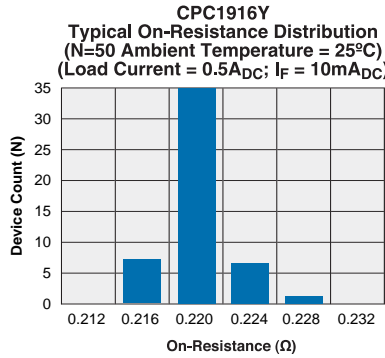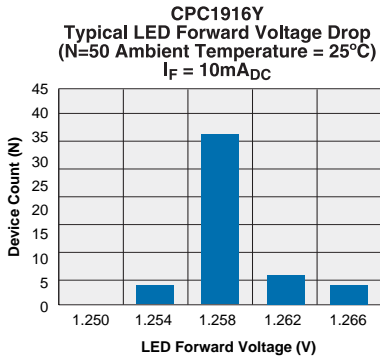

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

PERFORMANCE DATA\*

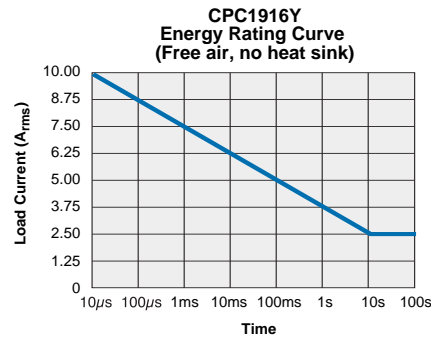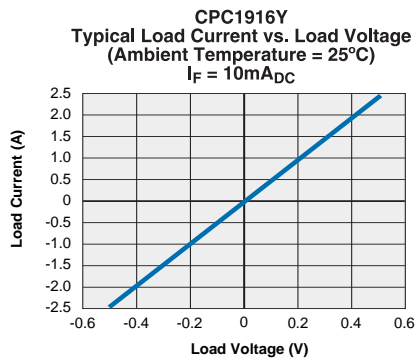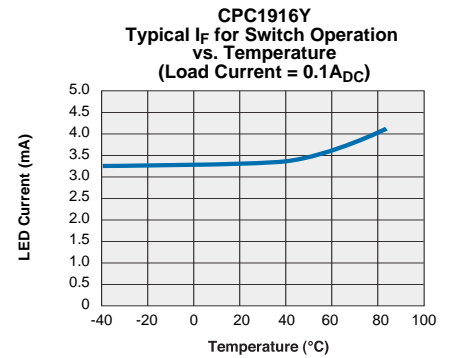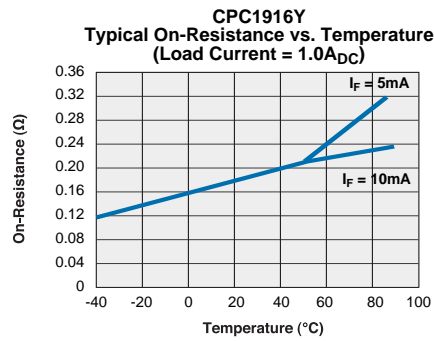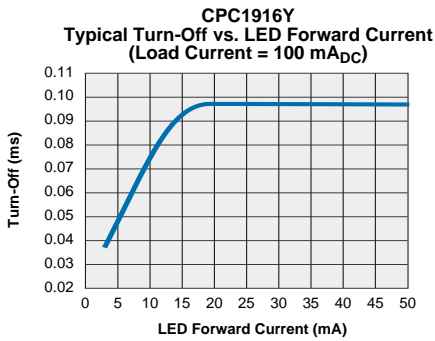

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

