


[PRODUCTS](#)
[CUSTOM CAPABILITIES](#)
[PART BUILDER](#)
[GLOBAL DISTRIBUTION](#)
[ORDER ONLINE](#)

## .250 [6,35] Hex Male/Female Standoffs

8-32 Threads - Stainless • Brass • Aluminum

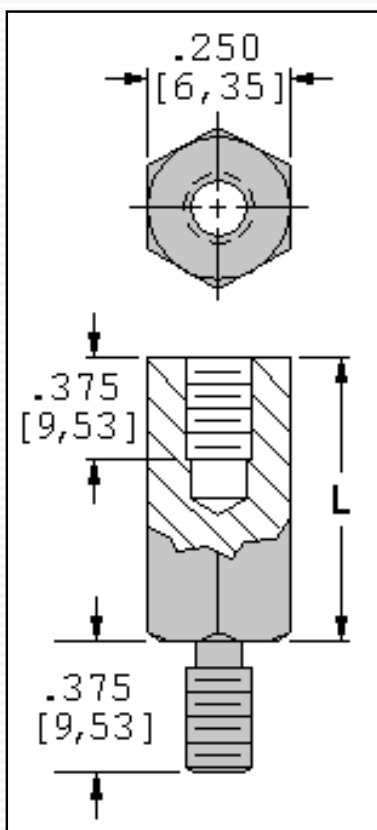


8-32 Threaded Standoffs

| Length<br>"L"                        | Stainless<br>Steel | Brass<br>Nickel<br>Plate | Aluminum<br>Clear<br>Iridite |
|--------------------------------------|--------------------|--------------------------|------------------------------|
| Inches [mm]                          | Cat. No.           | Cat. No.                 | Cat. No.                     |
| †† .375 [9,53]                       | <b>2149</b>        | <b>7220</b>              | <b>8426</b>                  |
| .500 [12,70]                         | <b>2150</b>        | <b>1957</b>              | <b>8427</b>                  |
| .625 [15,87]                         | <b>2151</b>        | <b>1958</b>              | <b>8428</b>                  |
| .750 [19,05]                         | <b>2152</b>        | <b>1959</b>              | <b>8429</b>                  |
| .875 [22,23]                         | <b>2153</b>        | <b>7221</b>              | <b>8430</b>                  |
| 1.000 [25,40]                        | <b>2154</b>        | <b>1960</b>              | <b>8431</b>                  |
| 1.125 [28,58]                        | <b>2155</b>        | <b>7222</b>              | <b>8432</b>                  |
| 1.250 [31,75]                        | <b>2156</b>        | <b>1961</b>              | <b>8433</b>                  |
| 1.375 [34,93]                        | <b>2157</b>        | <b>1962</b>              | <b>8434</b>                  |
| 1.500 [38,10]                        | <b>2158</b>        | <b>1963</b>              | <b>8435</b>                  |
| 1.625 [41,28]                        | <b>2159</b>        | <b>7224</b>              | <b>8436</b>                  |
| 1.750 [44,45]                        | <b>2160</b>        | <b>7225</b>              | <b>8437</b>                  |
| 2.000 [50,80]                        | <b>2161</b>        | <b>1964</b>              | <b>8438</b>                  |
| 2.500 [63,50]                        | —                  | <b>1965</b>              | —                            |
| 3.000 [76,20]                        | —                  | <b>1966</b>              | —                            |
| †† .250 [6,35] Internal Thread Depth |                    |                          |                              |

[Click to Request Samples](#)
[VIEW PRODUCT OVERVIEW](#)

8-32 Threads - Nylon

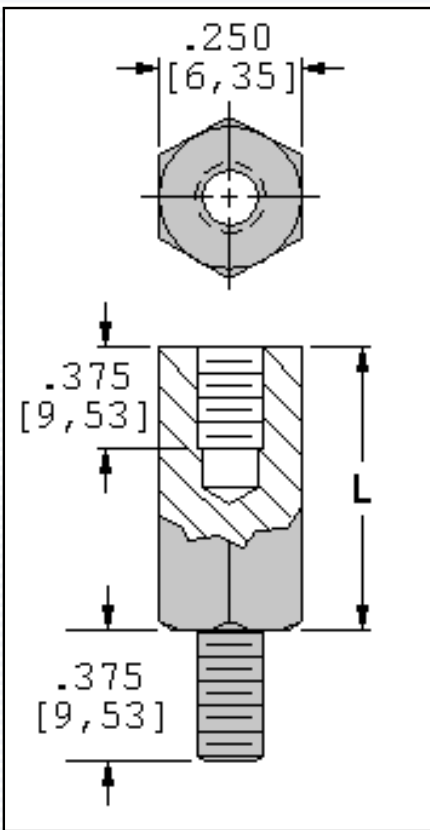

| 8-32 Threaded Standoffs              |             |
|--------------------------------------|-------------|
| Length<br>"L"                        | Nylon       |
| Inches [mm]                          | Cat. No.    |
| † .250 [6,35]                        | <b>4828</b> |
| †† .375 [9,53]                       | <b>4829</b> |
| .500 [12,70]                         | <b>4830</b> |
| .625 [15,87]                         | <b>4831</b> |
| .750 [19,05]                         | <b>4832</b> |
| .875 [22,23]                         | <b>4833</b> |
| 1.000 [25,40]                        | <b>4834</b> |
| 1.125 [28,58]                        | <b>4835</b> |
| 1.250 [31,75]                        | <b>4836</b> |
| 1.375 [34,93]                        | <b>4837</b> |
| 1.500 [38,10]                        | <b>4838</b> |
| 1.625 [41,28]                        | <b>4839</b> |
| 1.750 [44,45]                        | <b>4840</b> |
| 2.000 [50,80]                        | <b>4841</b> |
| † .140 [3,56] Internal Thread Depth  |             |
| †† .250 [6,35] Internal Thread Depth |             |

[Click to Request Samples](#)

[VIEW PRODUCT OVERVIEW](#)