




Designers' Choice

THREADED STANDOFFS



HEX

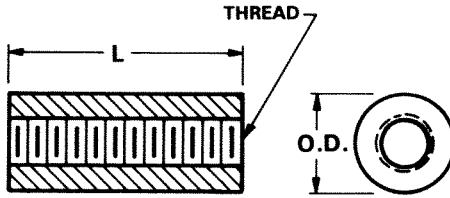

ROUND



MATERIAL

Brass: per ASTM-B16
Aluminum: QQ-A-225/3, Alloy 2011-T3

PLATING

Zinc: ASTM B633
Iridite Finish: MIL-C-5541

| THREAD | O.D. | LENGTH | ALUMINUM IRIDITE FINISH | | BRASS ZINC PLATE | |
|---------------|----------------|---------------|----------------------------|-------------------|---------------------|-------------------|
| | | | HEX CAT. NO. | ROUND CAT. NO. | HEX CAT. NO. | ROUND CAT. NO. |
| 2-56 | .156 (5/32) | 3/16 (.187) | 1797A | 1801A | 1798A | 1802A |
| | | 1/4 (.250) | 1797B | 1801B | 1798B | 1802B |
| | | 5/16 (.312) | 1797C | 1801C | 1798C | 1802C |
| | | 3/8 (.375) | 1797D | 1801D | 1798D | 1802D |
| 4-40 | .187 (3/16) | 1/4 (.250) | 1891 | 2025 | 1450 | 1547 |
| | | 3/8 (.375) | 1892 | 2026 | 1803 | 1864 |
| | | 1/2 (.500) | 1893 | 2027 | 1656 | 1657 |
| | | 5/8 (.625) | 1894 | 2028 | 1804 | 1865 |
| | | 3/4 (.750) | 1895 | 2029 | 1656A | 1657A |
| | | 7/8 (.875) | 1896 | 2030 | 1805 | 1866 |
| | | 1 (1.000) | 1897 | 2031 | 1656B | 1657B |
| 4-40 | .250 (1/4) | 1/4 (.250) | 2201 | 3478 | 1450A | 1547A |
| | | 3/8 (.375) | 2202 | 3479 | 1450B | 1547B |
| | | 1/2 (.500) | 2203 | 3480 | 1450C | 1547C |
| | | 5/8 (.625) | 1808 | 1839 | 1829 | 1867 |
| | | 3/4 (.750) | 2204 | 3481 | 1450D | 1547D |
| | | 7/8 (.875) | 1809 | 1846 | 1830 | 1876 |
| | | 1 (1.000) | 2205 | 3482 | 1450E | 1547E |
| | | 1-1/2 (1.500) | 2206 | 3483 | 1831 | 1877 |
| | | 2 (2.000) | 2207 | 3484 | 1832 | 1878 |
| | | 2-1/2 (2.500) | 2208 | 3485 | 1451A | 1548A |
| 6-32 | .250 (1/4) | 3/8 (.375) | 2209 | 3486 | 1451B | 1548B |
| | | 1/2 (.500) | 2210 | 3487 | 1451C | 1548C |
| | | 5/8 (.625) | 1813 | 1847 | 1451D | 1548D |
| | | 3/4 (.750) | 2211 | 3488 | 1451E | 1548E |
| | | 7/8 (.875) | 1816 | 1848 | 1833 | 1879 |
| | | 1 (1.000) | 2212 | 3489 | 1635 | 1548F |
| | | 1-1/4 (1.250) | 1818 | 1853 | 1636 | 1881 |
| | | 1-1/2 (1.500) | 2213 | 3490 | 1637 | 1882 |
| | | 1-3/4 (1.750) | 1819 | 1855 | 1638 | 1883 |
| | | 2 (2.000) | 2214 | 3491 | 1639 | 1884 |
| | | 2-1/4 (2.250) | 1820 | 1856 | 1642 | 1885 |
| | | 2-1/2 (2.500) | 1825 | 1857 | 1643 | 1886 |
| | | 8-32 | .250 (1/4) | 1/4 (.250) | 2215 | 3492 |
| 3/8 (.375) | 2216 | | | 3493 | 1474B | 1692B |
| 1/2 (.500) | 2217 | | | 3494 | 1474C | 1692C |
| 5/8 (.625) | 1827 | | | 1858 | 1834 | 1887 |
| 3/4 (.750) | 2218 | | | 3495 | 1474D | 1692D |
| 7/8 (.875) | 1828 | | | 1859 | 1836 | 1888 |
| 1 (1.000) | 2219 | | | 3496 | 1474E | 1692E |
| 1-1/2 (1.500) | 2220 | | | 3497 | 1837 | 1889 |
| 2 (2.000) | 2221 | | | 3498 | 1838 | 1899 |
| 8-32 | .375 (3/8) | 3/8 (.375) | 1926A | 2315A | 1452A | 1549A |
| | | 1/2 (.500) | 1926B | 2315B | 1452B | 1549B |
| | | 5/8 (.625) | 1926C | 2315C | 1452C | 1549C |
| | | 3/4 (.750) | 1926D | 2315D | 1452D | 1549D |
| | | 1 (1.000) | 1926E | 2315E | 1452E | 1549E |

NOTE: Spacers over 1.000 long are tapped .375 deep each end.