


PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	1.10 [.043]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]

L11206H121R-10


UNCONTROLLED
DOCUMENT

ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	120		
Minimum	90		
Maximum	150	0.15	800 mA

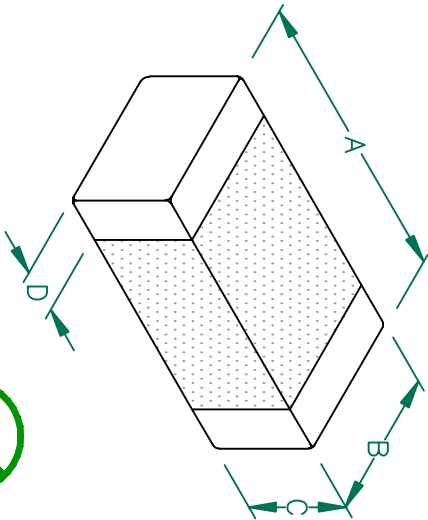


- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
 2. TERMINATION FINISH IS 100% TIN.
 3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.


Z vs FREQUENCY
IMPEDANCE UNDER DC BIAS

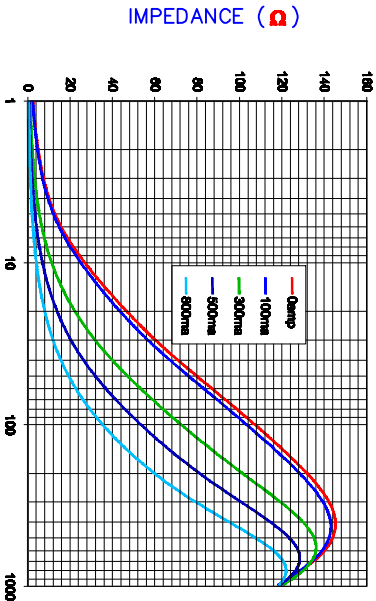

|Z|, R, AND X vs. FREQUENCY

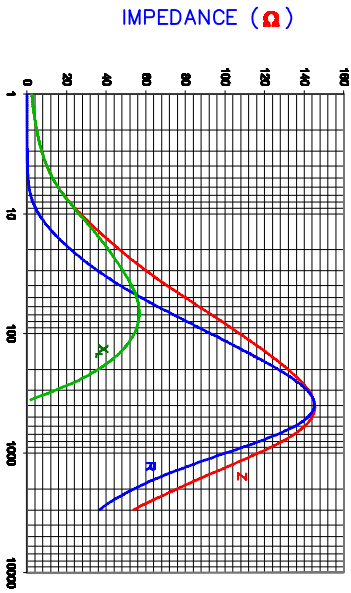


LAND PATTERNS FOR REFLOW SOLDERING

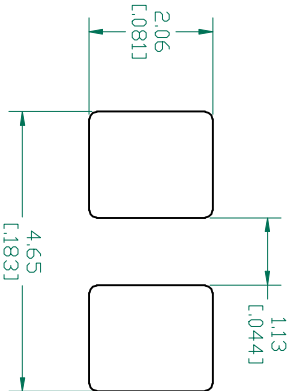

(For wave soldering, add 0.762 (0.030) to this dimension)

RECOMMENDED SOLDERING CONDITIONS

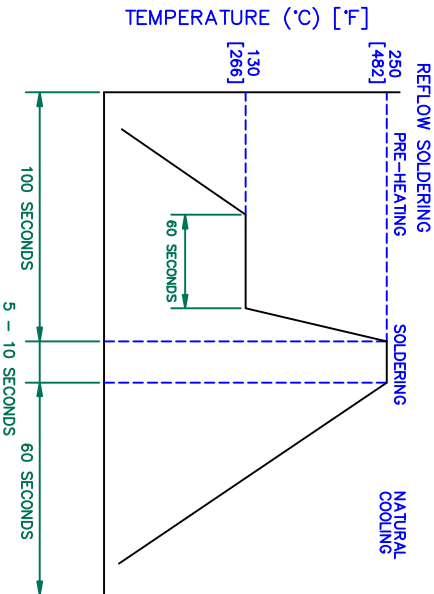

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

DIMENSIONS ARE IN mm [INCHES]			
REV	DATE	INT	DESCRIPTION
B	04/05/04	TMB	CORRECT LANDPATTERN DIMS ADD ROHS 06/28/06 JPK
A	04/05/04	TMB	ORIGINAL DRAFT
REV	DATE	INT	DESCRIPTION
PROJECT/PART NUMBER: L11206H121R-10			
DATE: 04/05/04			
CND # L11206H121R-10-B			
REV: B			
PART TYPE: CO-FIRE			
SCALE: NTS			
TOL # -			
SHEET: 2 of 2			
DRAWN BY: TMB			

