




SMSC[®]
SUCCESS BY DESIGN



EVB-USB2534BC-01 Evaluation Board User Manual

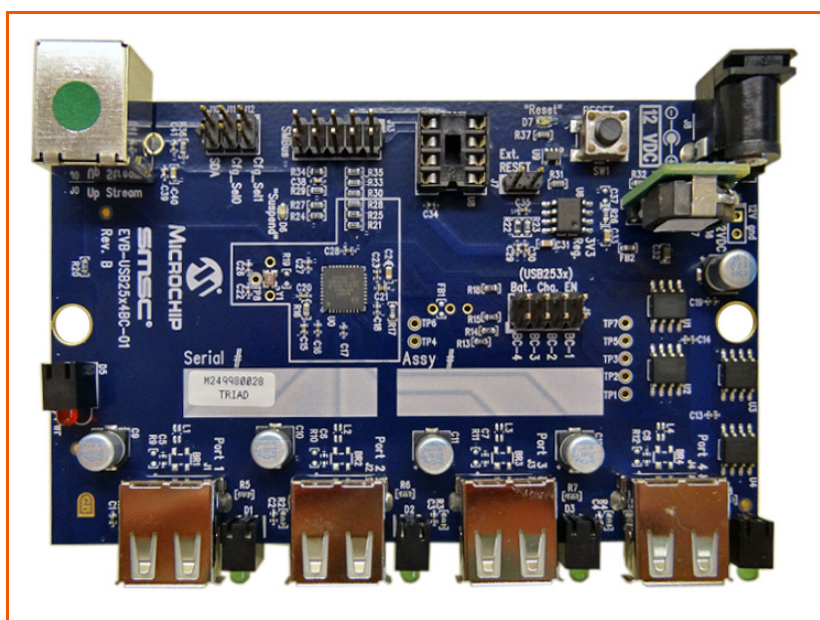

Copyright © 2013 SMSC or its subsidiaries. All rights reserved.

Circuit diagrams and other information relating to SMSC products are included as a means of illustrating typical applications. Consequently, complete information sufficient for construction purposes is not necessarily given. Although the information has been checked and is believed to be accurate, no responsibility is assumed for inaccuracies. SMSC reserves the right to make changes to specifications and product descriptions at any time without notice. Contact your local SMSC sales office to obtain the latest specifications before placing your product order. The provision of this information does not convey to the purchaser of the described semiconductor devices any licenses under any patent rights or other intellectual property rights of SMSC or others. All sales are expressly conditional on your agreement to the terms and conditions of the most recently dated version of SMSC's standard Terms of Sale Agreement dated before the date of your order (the "Terms of Sale Agreement"). The product may contain design defects or errors known as anomalies which may cause the product's functions to deviate from published specifications. Anomaly sheets are available upon request. SMSC products are not designed, intended, authorized or warranted for use in any life support or other application where product failure could cause or contribute to personal injury or severe property damage. Any and all such uses without prior written approval of an Officer of SMSC and further testing and/or modification will be fully at the risk of the customer. Copies of this document or other SMSC literature, as well as the Terms of Sale Agreement, may be obtained by visiting SMSC's website at <http://www.smsc.com>. SMSC is a registered trademark of Standard Microsystems Corporation ("SMSC"). Product names and company names are the trademarks of their respective holders.

The Microchip name and logo, and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SMSC DISCLAIMS AND EXCLUDES ANY AND ALL WARRANTIES, INCLUDING WITHOUT LIMITATION ANY AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND AGAINST INFRINGEMENT AND THE LIKE, AND ANY AND ALL WARRANTIES ARISING FROM ANY COURSE OF DEALING OR USAGE OF TRADE. IN NO EVENT SHALL SMSC BE LIABLE FOR ANY DIRECT, INCIDENTAL, INDIRECT, SPECIAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES; OR FOR LOST DATA, PROFITS, SAVINGS OR REVENUES OF ANY KIND; REGARDLESS OF THE FORM OF ACTION, WHETHER BASED ON CONTRACT; TORT; NEGLIGENCE OF SMSC OR OTHERS; STRICT LIABILITY; BREACH OF WARRANTY; OR OTHERWISE; WHETHER OR NOT ANY REMEDY OF BUYER IS HELD TO HAVE FAILED OF ITS ESSENTIAL PURPOSE, AND WHETHER OR NOT SMSC HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

1 Overview

The SMSC USB2534 is a Low-Power, Full-Featured, OEM configurable, Hi-Speed USB 2.0 compliant hub with four downstream ports, each capable of supporting battery charging. The EVB-USB2534BC-01 Revision B Evaluation Board demonstrates a standalone hub application with the features listed below, advanced power saving options, and configurable port assignments.

1.1 Features

- 36-pin QFN RoHS compliant package.
- Four USB 2.0 downstream hub ports with individual port power and over-current sense (OCS).
- Hi-Speed (480 Mbps), Full-Speed (12 Mbps), and Low-Speed (1.5 Mbps) compatible.
- USB Battery Charging is supported on all downstream USB ports up to 2 A.
- Multi-Transaction Translator is enabled.
- Supports internal default hub configuration. Optionally supports configuration from external EEPROM.
- Low cost 4-Layer space saving design with two outer signal layers, a power inner layer, and a ground inner layer.
- Individual port over-current sensing.
- Individual port power control with LEDs for port power indication.
- Self-powered operation.
- Operates from a single voltage (12.0 VDC, regulated) external power supply.
- External supply provides up to 6 A of 5.0 VDC for system use and USB downstream power through an onboard 5 VDC regulator.
- Onboard MCP1725 3.3 VDC regulator provides power to the USB2534 circuits and RESETn control.
- LED indicator for “Suspend” hub state (optional).
- EMI suppression provided by selection of capacitors and inner power/ground PCB layers.
- ESD component footprints provided (optional).
- Single crystal clock source.
- Schematics, layout, and bill of materials are available to minimize new product development time.

1.2 General Description

The EVB-USB2534BC-01 is an evaluation and demonstration platform featuring the USB2534 USB 2.0 Hub on a 4-layer RoHS compliant printed circuit board.

The EVB-USB2534BC-01 is designed to demonstrate the unique features of this device using a low-cost PCB implementation with individual port power control for the downstream USB 2.0 ports. All downstream USB 2.0 ports include a high current port power controller to fully support USB battery charging as a high current walk up port. (Note: Do not exceed 6 A total current consumption from 5 VDC.)

The EVB-USB2534BC-01 is designed to support internal default configuration settings and an external I²C^{®1} EEPROM (optional) for custom configured functionality. A location is provided for an external I²C EEPROM device for configuration at U8. [Figure 2.1](#) and [Figure 2.2](#) show the top and bottom level silk screen and copper layers.

¹.I²C is a registered trademark of Philips Corporation.

2 Hardware Configuration

2.1 Hardware Description

The EVB-USB2534BC-01 includes two onboard regulators. One generates 5 VDC from an external 12 VDC regulated power supply. This supplies power to the downstream USB ports and to the 3.3 VDC regulator. The second is an MCP1725, which generates 3.3 VDC for the hub device circuitry and also performs voltage supervisor and RESETn functions. The USB2534 generates its own 1.2 VDC for internal use with on-chip 1.2 VDC regulators. The internal 1.2 VDC regulator to the oscillator and the PLL is turned off during suspend to minimize suspend current. Downstream port power is distributed by four independent power switches at up to 2 A per port. (Note: Do not exceed 6 A total current consumption from 5 VDC.). Upstream and downstream port connectors have USB 2.0 compliant decoupling and a separate shield ground.

2.1.1 Port Assignment

Downstream ports are numbered 1 through 4. The USB2534 allows any or all of the downstream ports to be configured for high current battery USB charging, and the EVB-USB2534BC-01 is designed to demonstrate this feature.

In the default configuration, battery charging can be independently configured for each port with the Battery Charging Strapping header. Battery charging can also be configured using an external configuration, as described below.

2.1.2 USB2534 Configuration

Default: The EVB-USB2534BC-01 has been set up to support an internal default configuration as determined by the state of the CFG_SEL1, and CFG_SEL0 pins immediately after reset. The vendor ID, product ID, language ID, device ID, and other choices have been set using ROM code defaults.

EEPROM Option: The EVB-USB2534BC-01 can load configuration from an external two-wire, I²C EEPROM (U8). The EEPROM must be installed and the configuration option resistors on the CFG_SEL1 and CFG_SEL0 pins changed to enable this option. The EEPROM may be pre-programmed before installation, or be programmed via the USB Host. This option allows access to all USB2534 configuration registers and ID strings, providing detailed functional analysis and exercise as desired. The EVB-USB2534BC-01 is compatible with I²C EEPROMs from several manufacturers. The memory capacity must be at least 512 bytes.

2.1.3 Powered State LED

An optional LED (D5) indicates when +5 VDC and +3.3 VDC power is present.

2.1.4 RESETn LED

An optional LED (D7) indicates when the RESETn signal is driven low and the USB2534 is held in the Reset state.

2.1.5 Port Power LEDs

D1, D2, D3, and D4 indicate when 5 VDC port power is available to the associated downstream USB port(s).

2.1.6 Suspend LED

An optional LED (D5) indicates the active state of the hub.

2.1.7 Connector Description

The EVB-USB2534BC-01 provides a set of standard USB style connectors, one of type B for the upstream port and four of type A for downstream ports. Power is supplied via a 2.5 mm power jack. [Table 2.1](#) lists all of the connectors. For more details on the pinout of these connectors, please refer to the EVB-USB2534BC-01 schematics.

Table 2.1 Connector Description

CONNECTOR	TYPE	DESCRIPTION
J0	USB B	Upstream USB Port 0
J1	USB A	Downstream USB Port 1
J2	USB A	Downstream USB Port 2
J3	USB A	Downstream USB Port 3
J4	USB A	Downstream USB Port 4
J5	1x2 header	Battery Charging Strap Selector
J6	1x2 header (not populated)	Optional Ext. +12 VDC supply header
J7	1x2 header	External Reset Control
J8	Power Jack 2.5 mm	+12 VDC Regulated Power Supply
J10	1x2 header	I2C & SMBus Enable
J11, J12	1x2 headers	Configuration
J13	2x5 header	SMBus IF connection

2.1.8 Layout Considerations

The EVB-USB2534BC-01 is designed on four PCB layers - two signal layers and two supply layers. The PCB layer stackup is shown in [Table 2.2](#). All signals are routed on the top and bottom layers, while the internal layers are ground and power. Note that the differential signals from the USB2534 neatly fan out to match the upstream and downstream port placement, thus simplifying routing of these critical signals.

Table 2.2 PCB layer stack

Component Side	
Solder mask	
Layer 1	1.9 - 2.8 mil, finished
Pre-preg	4.25 mil, +/- 0.25 mil FR-4
Layer 2 -- GND	1.3 mil (nominal)
Core	~24 mil FR-4
Layer 3 -- POWER	1.3 mil (nominal)
Pre-preg	4.25 mil, +/- 0.25 mil FR-4
Layer 4	1.9 - 2.8 mil, finished
Solder mask	
Solder Side	

Component side top layer is shown in Figure 2.1 with silk screen information to identify component locations.

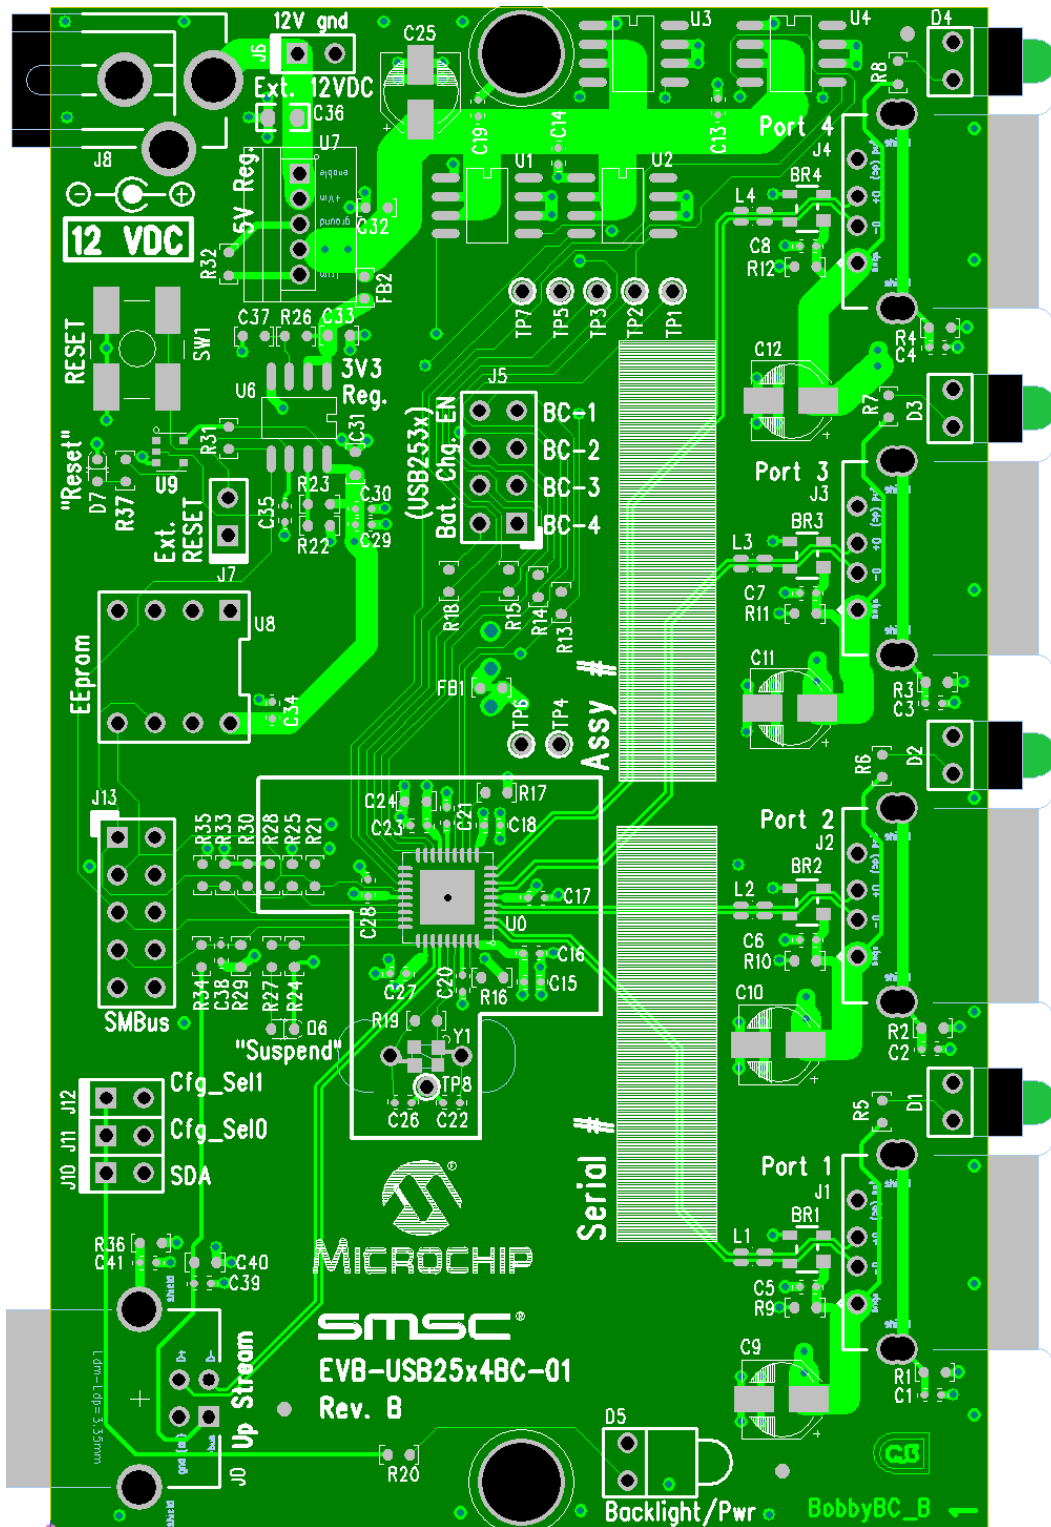


Figure 2.1 EVB-USB2534BC-01 Top Layer - Component Side

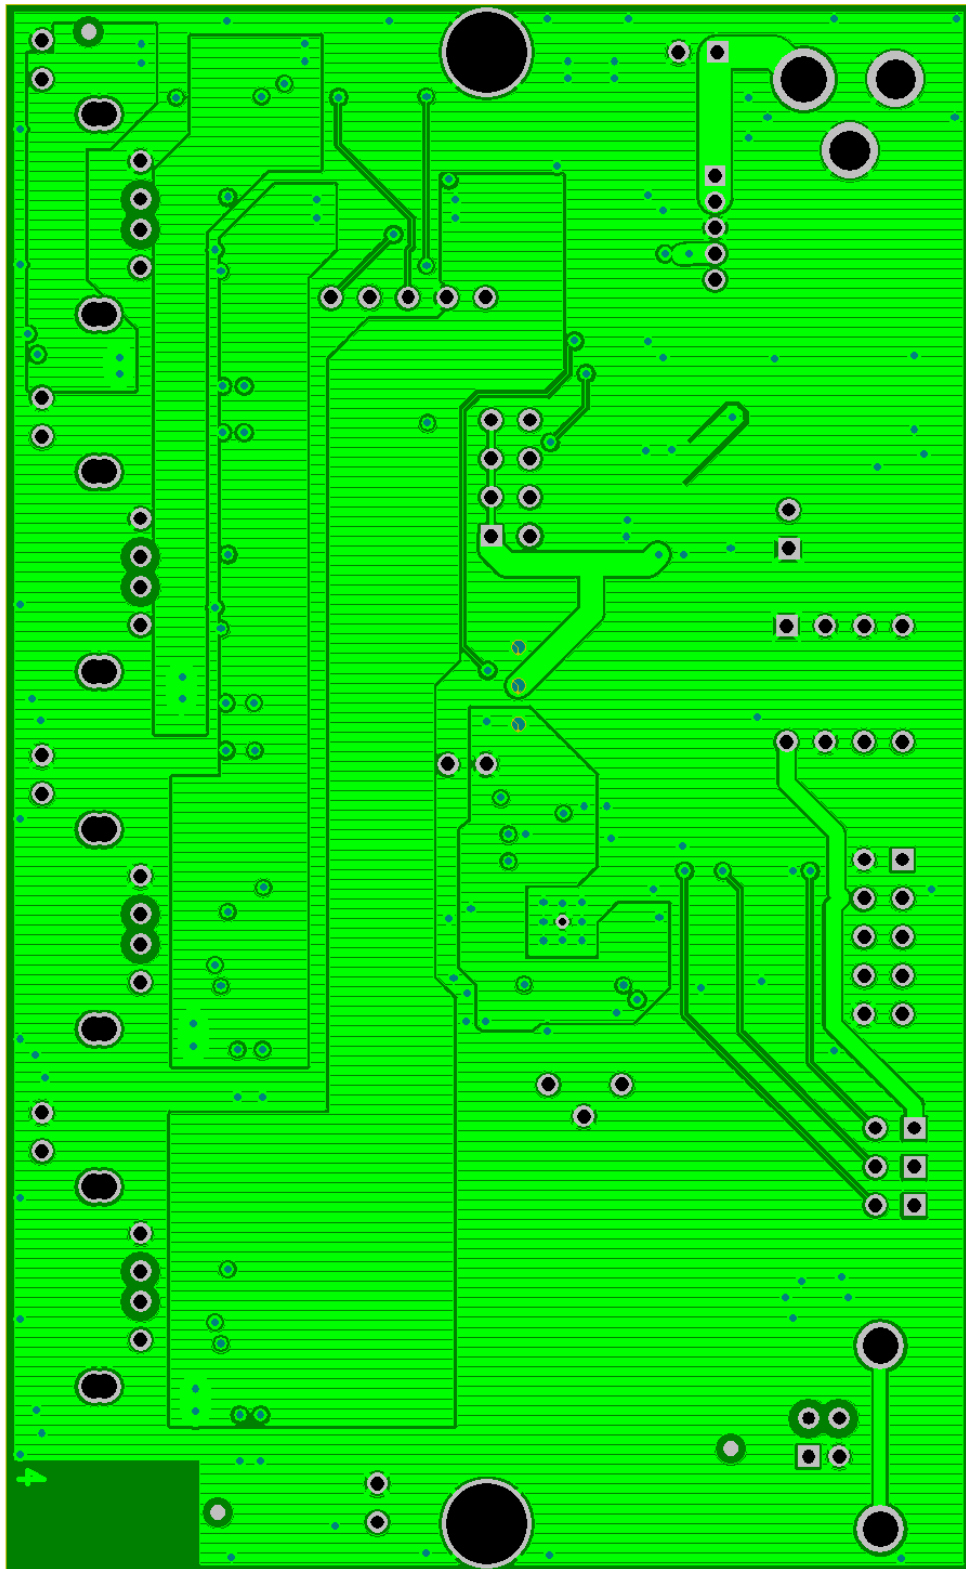


Figure 2.2 EVB-USB2534BC-01 Bottom Layer - Solder Side

3 User Manual Revision History

Table 3.1 Customer Revision History

REVISION LEVEL & DATE	SECTION/FIGURE/ENTRY	CORRECTION
Rev. 1.0 (06-24-13)	All	Initial Release