

VS-PPC-F2-MSTB-MNNA-1C-SPSA5

Order No.: 1405248

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1405248>

MSTB panel mounting frame, IP67, for push-pull interlocking, metal, with integrated contact insert for conductor connection, spring-cage connection, 24 V, for round mounting cutout, with seal, without mounting screws

**PROFI
NET****Commercial data**

GTIN (EAN)	 4 046356 334808
sales group	D560
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 362 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
12/14/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	5
Locking type	Push Pull
Connection method	Spring-cage conn.

Conductor cross-section	0.75 mm ² ... 2.5 mm ²
Connection cross-section AWG	18 ... 13
Color	silver
Ambient temperature (operation)	-40 °C ... 70 °C

Material data


Inflammability class acc. to UL 94	V0
Housing material	Zinc die-cast
Housing surface material	Nickel-plated
Contact carrier material	PA
Contact material	Copper alloy
Contact surface material	Gold over nickel
Material	Metal
Sealing material	NBR
Seal material	NBR
Degree of protection	IP65/67

Electrical characteristics


Number of positions	5
Pollution degree	2

Diagrams/Drawings

Dimensioned drawing

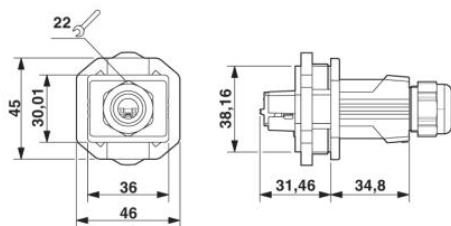

Push-Pull MSTB panel mounting frame

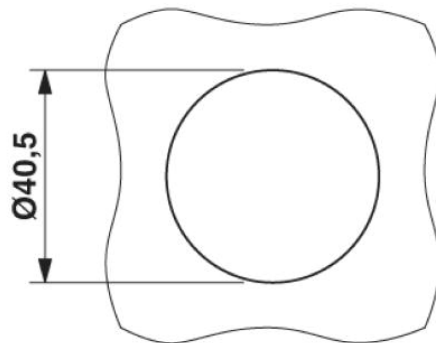

Panel cutout

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;