

Housing - HC-ADV-B16-SHFH-2STM32-EEE - 1408850


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON ADVANCE B16 box mounting base, for M6 screw locking, salt-water-resistant aluminum, with 2 x M32 thread, without surface coating



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 583459
GTIN	4046356583459

Technical data

Dimensions

Height	72 mm
Width	45 mm
Length	125.5 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
	IP68 (0.2 bar/24 h)
	IP69K
Degree of protection of housing (NEMA)	4 (NEMA 250)
	4X (NEMA 250)
	6P (NEMA 250)
	12 (NEMA 250)
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Size	B16
Housing type	Box mounting bases
Color	gray aluminum

Housing - HC-ADV-B16-SHFH-2STM32-EEE - 1408850


Technical data

General

Locking type	Screw locking
No. of cable outlets	2
Cable outlet	lateral
Screw connection	none
Type of the screw connection	2x M32
Housing material	Die-cast aluminum, corrosion resistant
Housing surface material	uncoated
Connection	To ensure optimum shielding, any insulating powder coating must be removed from the housing support area on the control cabinet panel

Drawings

Dimensional drawing

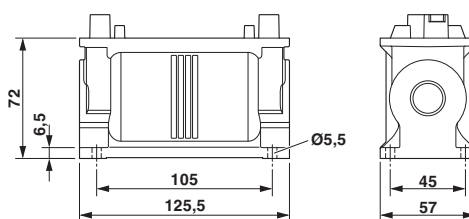

Dimensional drawing

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>