

HC-B 24-TMB-100/O1STM40G-EMV

Order No.: 1604573



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604573>

HEAVYCON ADVANCE EMV sleeve housing B24, with bayonet locking, height 100 mm, with 1x M40 thread, straight cable outlet

Commercial data

GTIN (EAN)	4017918948252
Note	Made-to-order
sales group	D201
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.493025 KG
Catalog page information	Page 479 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
Design	B24
Height	100 mm
Width	57 mm
Length	152 mm


Housing type	Sleeve housings
Locking type	Bayonet locking
Cable exit	Straight
Type of the screw connection	1x M40
Degree of protection	IP65/67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC coating, silver
Seal material	NBR, conductive
Material lock	High-grade steel
Material grip body interlock	PA-GF
Length of the assembly cutout	112 mm
Width of the assembly cutout	35 mm
Connection	If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding.

Accessories

Item	Designation	Description
Assembly		
1604641	HC-B-BF	Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking
General		
1690969	HC-B 24-TMB-SD-IP65	HEAVYCON ADVANCE IP65 protective cover B24, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm
1604654	HC-B-BF-SET	Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers

Diagrams/Drawings

Dimensioned drawing

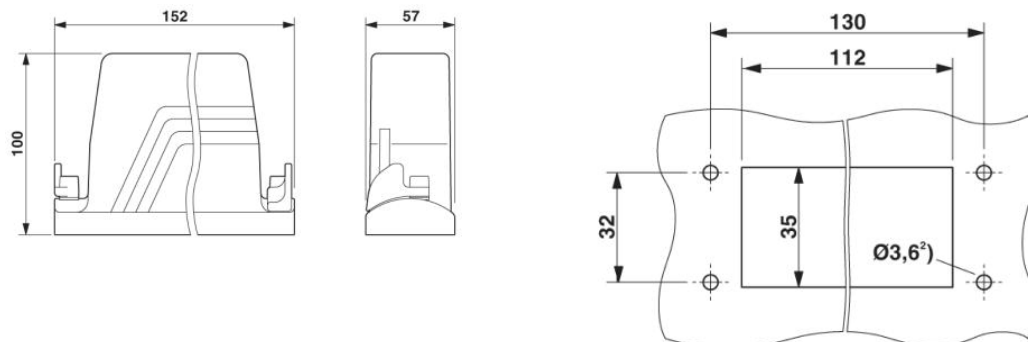

Panel cutout

²⁾ When self-tapping Torx screws are used
(Torx20, M4)

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;