

HC-B 16-TMQ-76/O1STM40S

Order No.: 1644753

The illustration shows the version HC-B 16-TMQ-76/O1STM32G



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644753>

HEAVYCON sleeve housing B16, with double locking latch, height 76 mm, without support 1x M40, lateral conductor exit

Commercial data

GTIN (EAN)	 4 017918 907785
Note	Made-to-order
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 582 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/18/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	76 mm
Width	43 mm
Length	94 mm

Housing type	Sleeve housings
Locking type	With double locking latch
No. of cable exits	1
Cable exit	Lateral
Pg screw connection	None
Type of the screw connection	1x M40
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

Diagrams/Drawings

Dimensioned drawing

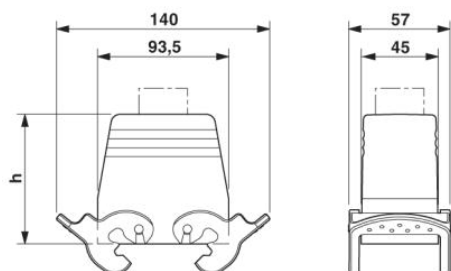


Illustration shows the article without double locking latch

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;