

VS-PC-2XHCS-200-SCRJ/SCRJ-1


Order No.: 1654934



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1654934>

Assembled fiber optic cable, break-out cable, HCS fiber 200/230 µm, SCRJ/IP20 on SCRJ/IP20, for installation inside control cabinets, length: 1 m



Commercial data	
GTIN (EAN)	 4 046356 028905
Note	Made-to-order
sales group	D523
Pack	1 pcs.
Customs tariff	85447000
Catalog page information	Page 215 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
04/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics	
Number of positions	2
Connection profile	SCRJ according to DIN EN 50377-6-1
Fiber type	HCS fiber
Fiber	200/230 µm


Ferrule diameter	2.50 mm
Number of fibers	2
Insertion/withdrawal cycles	≥ 1000
External cable diameter	Twin conductor (3.9 x 6.8 mm)
Type of cable	Break-out cable
Smallest bending radius, fixed installation	50 mm
Smallest bending radius, movable installation	50 mm
Length of cable	1 m
Ambient temperature (operation)	-40 °C ... 70 °C
	-20 °C ... 70 °C
	-20 °C ... 70 °C

Material data

Housing material	PBT
Outer sheath, material	TPE-O
External sheath, color	orange
Ferrule material	Copper alloy
Ferrule holder color	Red
Degree of protection	IP20


Diagrams/Drawings

Dimensioned drawing

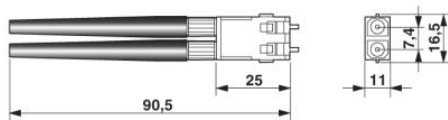


SCRJ plug connector IP20

Schematic diagram

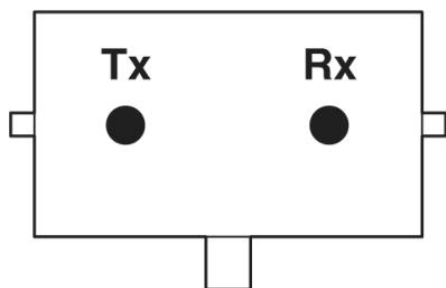

Pin assignment plug SCRJ

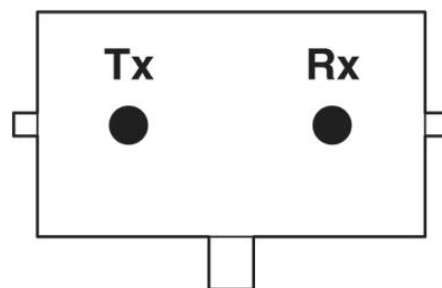

Pin assignment plug SCRJ

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;