

# VS-PC-2X-POF-980-SCRJ/FSMA-1


Order No.: 1657106



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1657106>

Assembled FO cable, break-out cable, polymer fiber 980/1000 µm, SCRJ/IP20 on FSMA/IP20, for installation inside the control cabinets, the conductor is suitable for the UV-protected outside insert, length: 1 m



Commercial data	
GTIN (EAN)	 4 046356 100168
Note	Made-to-order
sales group	D523
Pack	1 pcs.
Customs tariff	85447000
Catalog page information	Page 214 (PC-2009)

#### Product notes

WEEE/RoHS-compliant since:  
04/26/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Mechanical characteristics	
Number of positions	2
Connection profile	SCRJ according to DIN EN 50377-6-1
Fiber type	Polymer Fiber


Fiber	980/1000 µm
Ferrule diameter	2.50 mm
Number of fibers	2
Insertion/withdrawal cycles	≥ 1000
External cable diameter	Twin conductor (2.2 x 4.4 mm)
Type of cable	Break-out cable
Smallest bending radius, fixed installation	30 mm
Smallest bending radius, movable installation	30 mm
Length of cable	1 m
Ambient temperature (operation)	-30 °C ... 70 °C
	-20 °C ... 60 °C
	-20 °C ... 70 °C

**Material data**

Housing material	PBT/nickel silver
Outer sheath, material	PE
External sheath, color	black
Ferrule material	Copper alloy
Ferrule holder color	Blue
Degree of protection	IP20


**Diagrams/Drawings**

Dimensioned drawing

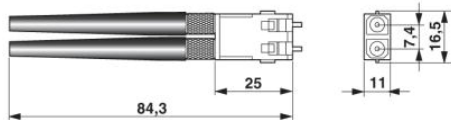

SCRJ plug connector IP20

Schematic diagram

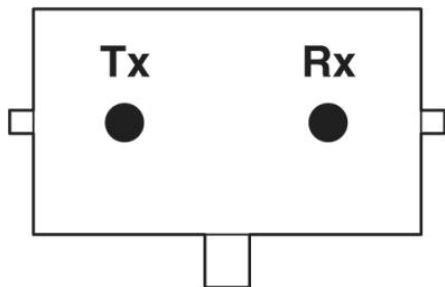

Pin assignment plug SCRJ

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2012 Phoenix Contact  
Technical modifications reserved;