


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

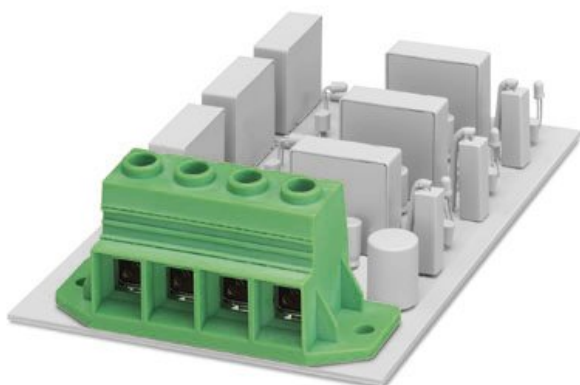

PCB terminal block with mounting flange, nominal current: 125 A, rated voltage: 1000 V, pitch: 15.0 mm, no. of positions: 2, mounting: Soldering, type of connection: Screw connection, connection direction from the conductor to the PCB: 0°

The illustration shows a 4-position version

Order No.	1932494
Ord designation	MKDSP 25/ 2-15,00-F
EAN	4017918902025
Pack	25 Pcs.
Customs tariff	85369010
Catalog page information	Page 245 (CC-2005)

► Product notes

WEEE/RoHS-compliant since: 07/15/2005



► Technical data

Dimensions / positions

Pitch	15 mm
Number of positions	2
Pin dimensions	1,2 x 1,2 mm
Hole diameter	1.6 mm
Screw thread	M 5
Tightening torque, min	2.5 Nm

Technical data

Insulating material group	I
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	125 A
Nominal voltage U_N	1000 V
Nominal cross section	25 mm ²
Maximum load current	125 A (with 35 mm ² conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	B7
Stripping length	18 mm

Connection data

Conductor cross section, rigid min.	0.5 mm ²
Conductor cross section, rigid max.	35 mm ²
Conductor cross section flexible min.	0.5 mm ²
Conductor cross section, flexible max.	25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	1 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	25 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	25 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	2
2 conductors with same cross section, solid min.	0.5 mm ²
2 conductors with same cross section, solid max.	6 mm ²
2 conductors with same cross section, flexible, min.	0.5 mm ²
2 conductors with same cross section, flexible max.	6 mm ²
2 conductors with same cross section, flexible, ferrules without plastic sleeve min.	0.5 mm ²
2 conductors with same cross section, flexible, ferrules without plastic sleeve, max.	4 mm ²
2 conductors with same cross section, flexible, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with identical cross section, flexible TWIN ferrules with plastic sleeve, max.	6 mm ²

► Certificates

Certificate logos



CUL


Nominal voltage U_N	600 V
Nominal current I_N	125 A
AWG/kcmil	20-10
Nominal voltage U_N	600 V
Nominal current I_N	125 A
AWG/kcmil	8-2

UL


Nominal voltage U_N	600 V
Nominal current I_N	125 A
AWG/kcmil	20-10
Nominal voltage U_N	600 V
Nominal current I_N	125 A
AWG/kcmil	8-2

► Drawings

Drilling diagram

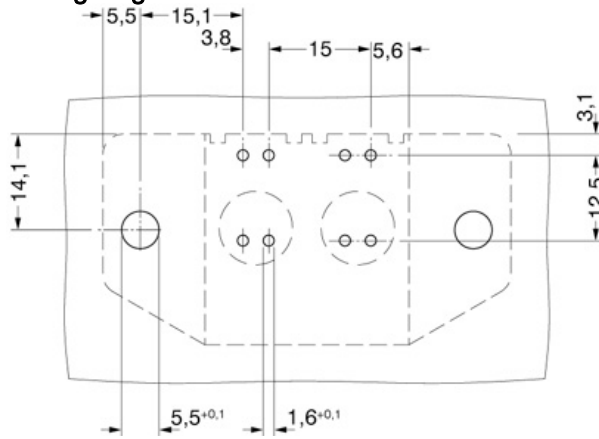

Dimensioned drawing

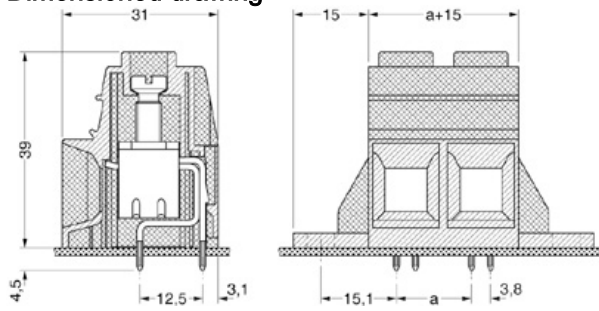

► Accessories

Item	Designation	Description
Marking		
0811192	SK 15/5:UNBEDRUCKT	Marker card, unprinted, with 12 pcs., 10-section marker strips, self-adhesive, color: White
0811202	ZBF 15:UNBEDRUCKT	Zack strip, flat, unprinted, 5-section, divisible, for labeling by the customer
Plug/Adapter		
0201647	RPS	Reducing plug, for transition from 4 mm diameter test plug socket, insulation: gray
Tools		
1205079	SZS 1,0X6,5	Screwdriver, bladed, matches all screw terminal blocks with a connection cross section of over 16 mm ² , blade: 1.0 x 6.5 mm



► Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;