


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

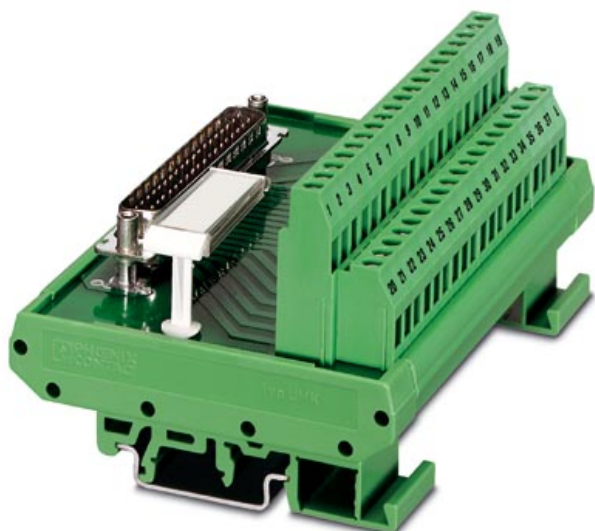

VARIOFACE module, with screw connection and D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, 37-pos.

Order No.	2281115
Ord designation	FLKM-D37 SUB/S
EAN	4017918054564
Pack	5 Pcs.
Customs tariff	85369010
Catalog page information	Page 216 (IF-2005)

► Technical data

General data

Nominal voltage U_N	125 V
Max. current carrying capacity per branch	2.5 A
Number of positions	37
Length	77 mm
Width	101.3 mm
Height	58.5 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Standards/regulations	IEC 60664
Standards/regulations	IEC 60664 A
Standards/regulations	DIN VDE 0110
Standards/regulations	DIN VDE 0160 (in parts)

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC/ DIN VDE
Type of connection	Screw connection
Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section, flexible max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	D-SUB connection
Type of connection	Pluggable

► Certificates

CUL


Comments	Field wiring
Nominal voltage U_N	125 V
Nominal current I_N	2.5 A
AWG/kcmil	30-12

UL

Comments	Field wiring
Nominal voltage U_N	125 V
Nominal current I_N	2.5 A
AWG/kcmil	30-12

► Drawings

Schematic diagram

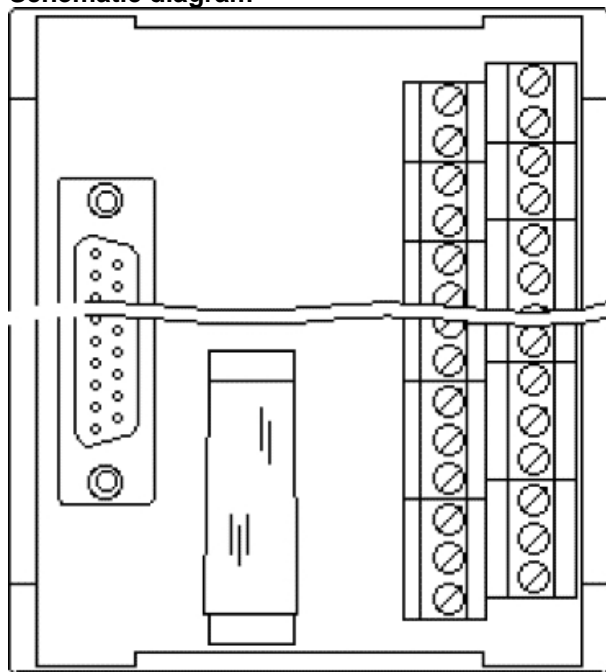

Approval logo





► **Address**

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;