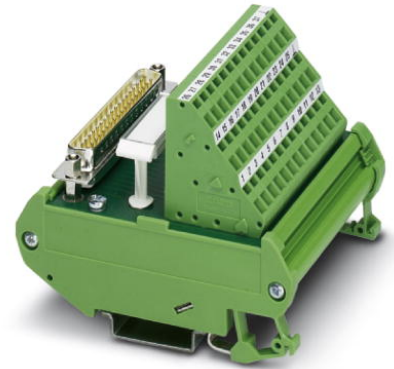


**FLKMS-D37 SUB/S/ZFK3DS/PE**

Order No.: 2295965

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2295965>

VARIOFACE module, with spring-cage connection and D-Subminiature pin strip, for mounting on NS 35/7,5 or NS 32, 37-pos.

**Commercial data**

GTIN (EAN)	4017918464530
sales group	I091
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1977 KG

**Product notes**WEEE/RoHS-compliant since:  
07/06/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
Number of positions	37
Width	86.8 mm
Depth	78.8 mm

Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Test voltage	800 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 664/IEC 664 A
	DIN VDE 0110
	DIN VDE 0109-11, draft
Pollution degree	2
Surge voltage category	II

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Connection 2	D-SUB connection
Type of connection	Pluggable
Number of positions	37

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;