


FLKM 10/ZFKDS

Order No.: 2302887

The illustration shows a 40-position version

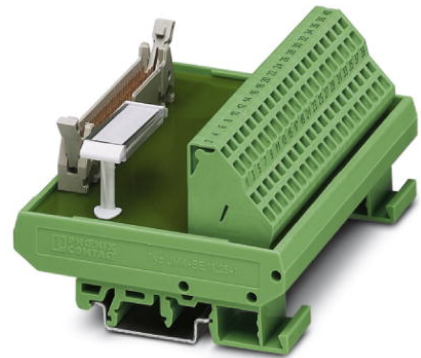

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2302887>

Standard 1:1 FLK module, with spring-cage connection and flat-ribbon cable plug connector, no. of positions 10



Commercial data	
GTIN (EAN)	4017918941406
Note	Made-to-order
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.0714 KG
Catalog page information	Page 280 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
03/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	< 50 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	10

Width	34 mm
Height	51 mm
Depth	77 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

Connection data

Connection 1	PCB connection
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Connection 2	Flat-ribbon cable connection
Type of connection	Pluggable


Accessories

Item	Designation	Description
Cable/conductor		
2299204	FLK 10/EZ-DR/ 50/KONFEK	Round cable set, with two 10-pos. socket strips, (1:1 connection), cable length: 0.5 m
2299217	FLK 10/EZ-DR/ 100/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 1 m
2299220	FLK 10/EZ-DR/ 150/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 1.5 m
2299233	FLK 10/EZ-DR/ 200/KONFEK	Round cable set, with two 10-pos. socket strips, (1:1 connection), cable length: 2 m
2299246	FLK 10/EZ-DR/ 300/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 3 m
2299259	FLK 10/EZ-DR/ 400/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 4 m

2299262	FLK 10/EZ-DR/ 600/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 6 m
2299275	FLK 10/EZ-DR/ 800/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 8 m
2299288	FLK 10/EZ-DR/1000/KONFEK	Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 10 m
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

Diagrams/Drawings

Circuit diagram

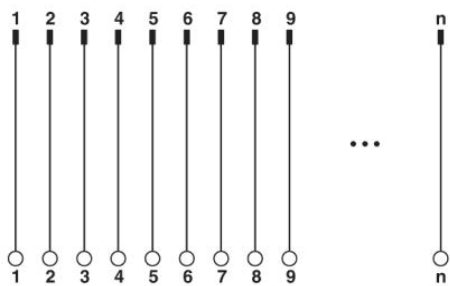

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;