


Interface module - FLKM 40/ZFKDS - 2302942

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Standard 1:1 FLK module, with spring-cage connection and flat-ribbon cable connector, no. of positions 40

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 941451
GTIN	4017918941451

Technical data

Dimensions

Width	113 mm
Height	77 mm
Depth	51 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	< 50 V AC
	60 V DC
Max. perm. current (per branch)	1 A
Number of positions	40
Status display	No
Mounting position	any
Degree of protection	IP20

Connection data for connection 1

Connection name	Field level
-----------------	-------------

Interface module - FLKM 40/ZFKDS - 2302942

Technical data

Connection data for connection 1

Connection method	Spring-cage connection
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	40

Supported controller

Controller	ALLEN-BRADLEY SLC 500
- suitable I/O card	1746 OB 32
	1746 OV 32
	1746 IB 32
	1746 IV 32

Standards and Regulations


Standards/regulations	IEC 60664
	DIN EN 50178
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV
Insulation	Functional insulation
Degree of pollution	2
Overvoltage category	II

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Circuit diagram

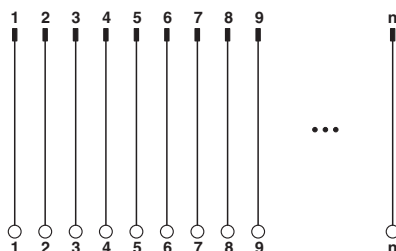

Interface module - FLKM 40/ZFKDS - 2302942

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>