

Passive module - FLKM-2KS40/YCS/ZFKDS - 2314752

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Universal interface module with 1:1 connection between the 40-pos. system connection and the spring-cage connection.



RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356155601

Technical data

Dimensions

Width	100 mm
Height	126 mm
Depth	68 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	24 V DC ±10 %
Max. perm. current (per branch)	100 mA
Number of positions	40
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection method	Spring-cage connection
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²

Passive module - FLKM-2KS40/YCS/ZFKDS - 2314752

Technical data

Connection data for connection 1

Conductor cross section AWG	24 ... 12
-----------------------------	-----------

Connection data for connection 2

Connection name	Controller level
Connection method	Yokogawa KS-compatible
Torque	0.5 Nm
Number of connections	1
Number of positions	40
Note	Usable system cables: Phoenix Contact YUC40, Yokogawa KS1

Supported controller

Controller	YOKOGAWA CS3000 CentumVP
- suitable I/O card	AAI543
	AAI141
	AAI143
	AAI835
	AAI841
	AAI135
	AAR181
	AAT141
	AAV141
	AAV142
	AAB841
	AAV542
Controller	YOKOGAWA STARDOM
- suitable I/O card	NFAI141
	NFAI43
	NFAI543
	NFAI135
	NFAP135
	NFAV141
	NFAV142
	NFAV542
	NFAB841
	NFAI841
	NFAI835

Standards and Regulations

Standards/regulations	DIN EN 50178
Degree of pollution	2
Overvoltage category	III

Environmental Product Compliance

Passive module - FLKM-2KS40/YCS/ZFKDS - 2314752


Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Dimensional drawing

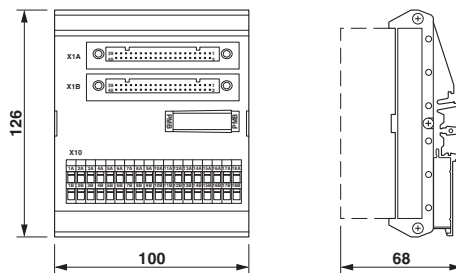

Passive module - FLKM-2KS40/YCS/ZFKDS - 2314752

Circuit diagram

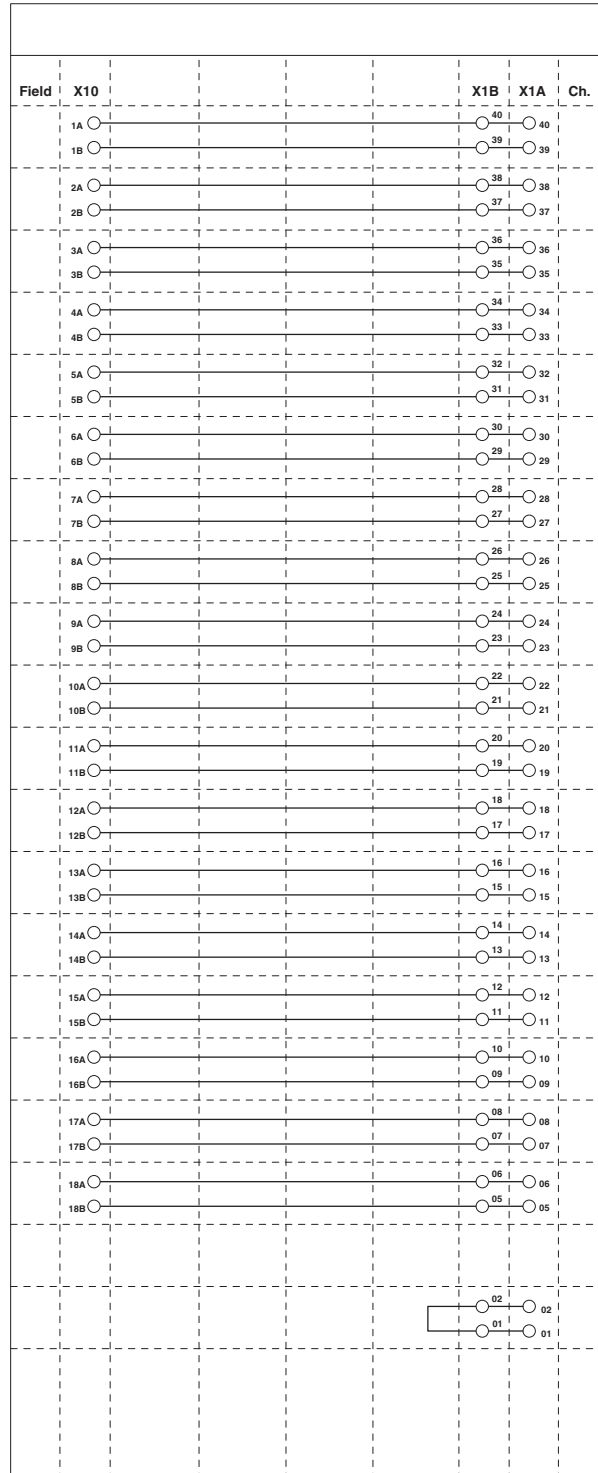

Passive module - FLKM-2KS40/YCS/ZFKDS - 2314752

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>