


**VIP-3/SC/FLK26**

Order No.: 2315052



VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 26-pos.

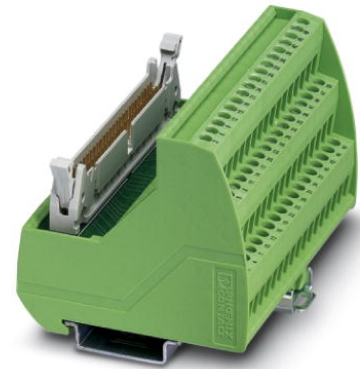

| Commercial data          |                    |
|--------------------------|--------------------|
| GTIN (EAN)               | 4046356312882      |
| sales group              | I500               |
| Pack                     | 1 pcs.             |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.1456 KG          |
| Catalog page information | Page 279 (IF-2009) |

## Product notes

WEEE/RoHS-compliant since:  
09/02/2008



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****General data**

|   |            |
|---|------------|
| Nominal voltage $U_N$                     | 60 V AC/DC |
| Max. current carrying capacity per branch | 1 A        |
| Number of positions                       | 26         |
| Width                                     | 57.1 mm    |

|   |                  |
|---|------------------|
| Height                                  | 62 mm            |
| Depth                                   | 69 mm            |
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position                       | Any              |
| Standards/regulations                   | IEC 60664        |
|   | DIN EN 50178     |
|   | IEC 62103        |
| Pollution degree                        | 2                |
| Surge voltage category                  | II               |

**Connection data**

|  |                     |
|--|---------------------|
| Connection 1                           | PCB connection      |
| Connection in acc. with standard       | IEC / EN            |
| Type of connection                     | Screw connection    |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>   |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 24                  |
| Conductor cross section AWG/kcmil max  | 12                  |
| Stripping length                       | 8 mm                |
| Screw thread                           | M 3                 |

**Certificates / Approvals**

Certification

CSA, CUL, UL

**CSA**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 125 V |
| Nominal current $I_N$ | 1 A   |
| AWG/kcmil             | 30-12 |

**CUL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 125 V |
| Nominal current $I_N$ | 1 A   |
| AWG/kcmil             | 30-12 |

**UL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 125 V |
| Nominal current $I_N$ | 1 A   |
| AWG/kcmil             | 30-12 |

**Accessories**

| Item                   | Designation              | Description  |
|------------------------|--------------------------|--|
| <b>Cable/conductor</b> |                          |  |
| 2299385                | FLK 26/EZ-DR/ 50/KONFEK  | Round cable set, with two 26-pos. socket strips, (1:1 connection), cable length: 0.5 m   |
| 2299398                | FLK 26/EZ-DR/ 100/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 1 m  |
| 2299408                | FLK 26/EZ-DR/ 150/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 1.5 m  |
| 2299411                | FLK 26/EZ-DR/ 200/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 2 m  |
| 2299424                | FLK 26/EZ-DR/ 300/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 3 m  |
| 2299437                | FLK 26/EZ-DR/ 400/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 4 m  |
| 2299440                | FLK 26/EZ-DR/ 600/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 6 m  |
| 2299453                | FLK 26/EZ-DR/ 800/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 8 m  |
| 2299466                | FLK 26/EZ-DR/1000/KONFEK | Round cable set, with two 26-pos. socket strips (1:1 connection), cable length: 10 m   |
| 2295059                | FLK EZ-DR.../.../...     | Round cable, with preassembly, not shielded, variable cable length   |
| 2318693                | VIP-CAB-FLK26-0,14/...   | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable |
| 2318622                | VIP-CAB-FLK26/0,14/0,5M  | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m    |

|         |                         |   |
|---------|-------------------------|---|
| 2318635 | VIP-CAB-FLK26/0,14/1,0M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m   |
| 2318648 | VIP-CAB-FLK26/0,14/1,5M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m |
| 2318651 | VIP-CAB-FLK26/0,14/2,0M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m   |
| 2318664 | VIP-CAB-FLK26/0,14/3,0M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m   |
| 2318677 | VIP-CAB-FLK26/0,14/4,0M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m   |
| 2318680 | VIP-CAB-FLK26/0,14/6,0M | Assembled round cable with two molded 26-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m   |

**General**

|         |             |  |
|---------|-------------|--|
| 5147777 | BLUEMARK X1 | Printers with UV technology for printing plastic labels in UniCard format. |
|---------|-------------|--|

**Marking**

|         |                    |  |
|---------|--------------------|--|
| 0818111 | UC-TM 4            | UniCard sheets, for labeling terminal blocks using a Zack marker strip groove, 120-section, can be labeled with BLUEMARK X1 and CMS-P1-PLOTTER, color: White                     |
| 0818085 | UC-TM 6            | UniCard sheets, for labeling terminal blocks using Zack marker strip groove, 80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White                              |
| 0811862 | ZB 22:UNBEDRUCKT   | Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White |
| 0809793 | ZB 5,08:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack   |

**Diagrams/Drawings**

Circuit diagram

