


IB IL 24 FLM-PAC

Order No.: 2736903

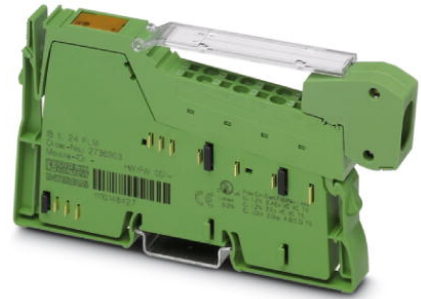

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2736903>

Inline branch terminal for coupling a Fieldline Modular local bus M12 or M8 at the end of an Inline station, conversion of Inline local bus physical structure to the Fieldline local bus physical structure

Commercial data	
GTIN (EAN)	4046356079204
sales group	K413
Pack	1 pcs.
Customs tariff	85389091
Weight/Piece	0.0884 KG
Catalog page information	Page 249 (AX-2009)

Product notes

WEEE/RoHS-compliant since: 11/27/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interface	
Fieldbus system	Lokalbus
Name	Inline local bus
Type of connection	Inline data jumper
Transmission speed	500 kBit/s

Fieldbus system	Fieldline Modular M8 + M12 Lokalbus
Name	Fieldline Modular M8 local bus
Type of connection	Inline shield connector
Transmission speed	500 kBit/s
Transmission physics	Copper

Inline potential routing

Communications voltage U_L	7.5 V DC
Current consumption from U_L	110 mA
Segment power supply voltage U_S	24 V DC (nominal value)
Current consumption from U_S	max. 6 A (Fieldline Modular M8 local bus, with both-side supply; maximum 3 A for go and return line each)
	max. 55 mA (internal)

General data

Width	12.2 mm
Height	134 mm
Depth	71.5 mm
Weight	43 g
Mounting type	DIN rail
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % (On average, 85% occasionally)
Permissible humidity (storage/transport)	75 % (On average, 85% occasionally)
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Class of protection	Class 3 as per VDE 0106, IEC 61440

Certificates / Approvals



Certification	CUL, UL
Certification Ex:	CUL-EX LIS, UL-EX LIS


Accessories

Item	Designation	Description
Cable/conductor		
2806286	IBS RBC METER-T	Remote bus cable, by the meter, for fixed routing
2723123	IBS RBC METER/F-T	Remote bus cable, by the meter, for applications demanding flexibility


General		
2727747	IB IL 24 SEG/F	Inline segment terminal block, without accessories, 24 V DC, with fuse
2861373	IB IL 24 SEG/F-PAC	Inline segment terminal block, complete with accessories (connector and labeling field), 24 V DC, with fuse

Diagrams/Drawings

Connection diagram

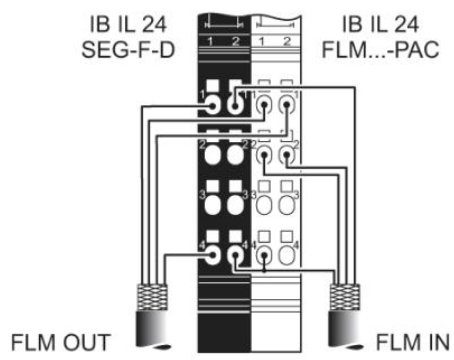

Dimensioned drawing

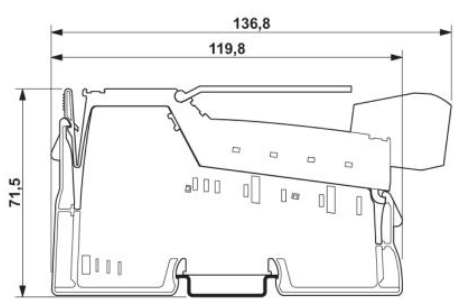

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;