

## Surge protection device - DT-UFB-IB-RB0 - 2800056

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Attachment plug with surge protection for 5-conductor remote bus input. Connection: 9-pos. D-SUB socket - plug. Can alternatively be snapped onto DIN rails. Incl. 1 m cable with 9-pos. D-SUB connection.




### Your advantages

- ✓ 9-pos. D-SUB connection
- ✓ Adapter type
- ✓ DIN rail mounting possible by removing the cap
- ✓ D-SUB cable included
- ✓ For remote bus modules (remote bus OUT - RBO)



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 462723
GTIN	4046356462723

### Technical data

#### Dimensions

Height	110 mm
Width	25 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

#### General

Housing material	Zinc die-cast
Color	silver/black
Standards for clearances and creepage distances	IEC 60664-1
	VDE 0110-1

# Surge protection device - DT-UFB-IB-RB0 - 2800056

## Technical data

### General

Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
Type	Attachment plug for DIN rail mounting
Number of positions	5
Direction of action	Line-Line & Line-Ground/Shield

### Protective circuit

IEC test classification	B2
	C1
	C2
	C3
	D1
VDE requirement class	B2
	C1
	C2
	C3
	D1
Maximum continuous voltage $U_c$	5.8 V DC
Rated current	$\leq 180$ mA (25 °C)
Operating effective current $I_c$ at $U_c$	$\leq 1$ $\mu$ A
Residual current $I_{PE}$	$\leq 5$ $\mu$ A
Nominal discharge current $I_n$ (8/20) $\mu$ s (line-line)	$\leq 5$ kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (line-earth)	$\leq 5$ kA
Total discharge current $I_{total}$ (8/20) $\mu$ s	10 kA
Output voltage limitation at 1 kV/ $\mu$ s (line-earth) spike	$\leq 700$ V
Output voltage limitation at 1 kV/ $\mu$ s (line-line) static	$\leq 15$ V
Output voltage limitation at 1 kV/ $\mu$ s (line-earth) static	$\leq 700$ V
Output voltage limitation at 1 kV/ $\mu$ s (line-signalground) static	$\leq 15$ V
Residual voltage at $I_n$ (line-line)	$\leq 25$ V
Residual voltage at $I_n$ (line-earth)	$\leq 55$ V
Residual voltage at $I_n$ (line-signalground)	$\leq 25$ V
Voltage protection level $U_p$ (line-line)	$\leq 16$ V (B2 - 100 A)
	$\leq 20$ V (C1 - 500 A)
	$\leq 60$ V (C2 - 1 kA)
	$\leq 60$ V (C2 - 5 kA)
Voltage protection level $U_p$ (line-earth)	$\leq 700$ V (B2 - 100 A)
	$\leq 700$ V (C1 - 500 A)
	$\leq 700$ V (C2 - 5 kA)
Response time $t_A$ (line-line)	$\leq 1$ ns
Response time $t_A$ (line-earth)	$\leq 100$ ns
Input attenuation aE, sym.	typ. 0.5 dB ( $\leq 5$ MHz / 150 $\Omega$ )

# Surge protection device - DT-UFB-IB-RB0 - 2800056

## Technical data

### Protective circuit

	typ. 0.6 dB ( $\leq 10$ MHz / 100/150 $\Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 100 Ohm system	$\geq 100$ MHz
Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system	$\geq 100$ MHz
Capacity (line-line)	typ. 20 pF
Resistance in series	typ. 7 $\Omega$
Surge protection fault message	none
Impulse durability (line-line)	C1 - 1 kV/500 A C2 - 10 kV/5 kA B2 - 4 kV/100 A
Impulse durability (line-earth)	B2 - 4 kV/100 A C1 - 1 kV/500 A C2 - 10 kV/5 kA D1 - 1 kA

### Connection data

Connection method	D-SUB-9
Connection method IN	D-SUB-9 socket
Connection method OUT	D-SUB-9 connector
Connection technology	Remote bus output

### Connection, equipotential bonding


Connection method	Cable connection
-------------------	------------------

### Standards and Regulations


Standards/regulations	IEC 61643-21
	DIN EN 61643-21
Standards/specifications	DIN EN 61643-21 2002
	IEC 61643-21 2000

## Drawings

Dimensional drawing

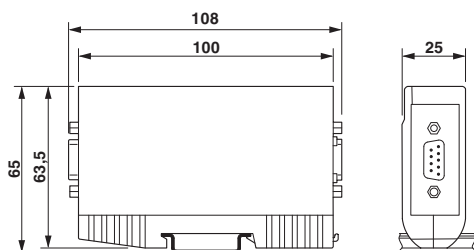

Circuit diagram

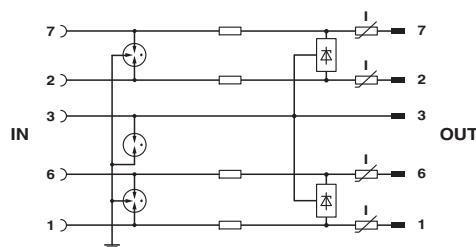

## Surge protection device - DT-UFB-IB-RB0 - 2800056

### Approvals

Approvals

---

Approvals


EAC

---

Ex Approvals

---

### Approval details

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>