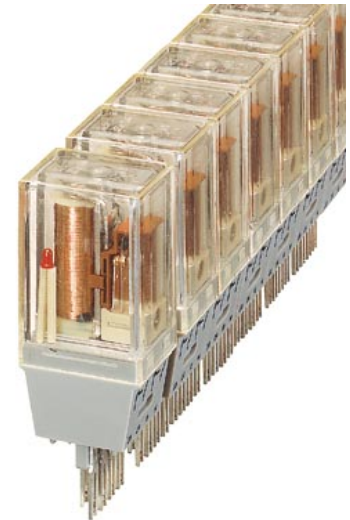


ST-REL4-HG 24/ 1- 1

Order No.: 2851011

The illustration shows version ST-REL 4-HW 24/1-1

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2851011>

Relay connector, equipped with Hengstler miniature round relay, contacts (AgCdO+Au): small to large loads, 2 N/O contacts, input voltage 24 V DC, with light indicator, can be plugged on basic termination blocks

| Commercial data | |
|--------------------------|-------------------|
| GTIN (EAN) | 4017918078584 |
| Note | Made-to-order |
| sales group | G015 |
| Pack | 10 pcs. |
| Customs tariff | 85364190 |
| Weight/Piece | 0.06781 KG |
| Catalog page information | Page 83 (IF-2002) |

Product notes

WEEE/RoHS-compliant since:
02/09/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

| | |
|---|--|
| Nominal input voltage U_N | 24 V DC |
| Input voltage range in reference to U_N | 0.8 ... 1.1 |
| Nominal input current at U_{IN} | 21 mA |
| Typical response time | 15 ms (with DC) |
| Typical release time | 25 ms (with DC) |
| Operating voltage display | Yes |
| Name of protection | Damping diode, polarity protection |
| Protective circuit/component | Damping diode, polarity protection diode |

Contact side

| | |
|---------------------------------------|--|
| Contact type | Single contact, 2 N/O contact |
| Contact material | Silver cadmium oxide (AgCdO), 10 µm hard gold-plated |
| Maximum switching voltage | 250 V AC/DC |
| Maximum inrush current | 6 A |
| Limiting continuous current | 6 A |
| Interrupting rating (ohmic load) max. | 120 W (for 24 V DC) |
| | 180 W (for 48 V DC) |
| | 105 W (for 60 V DC) |
| | 60 W (for 110 V DC) |
| | 90 W (for 220 V DC) |
| | 1250 VA (for 250 V AC) |

General data

| | |
|--|-----------------------------------|
| Width | 27 mm |
| Height | 66.5 mm |
| Depth | 33 mm |
| Test voltage relay winding/relay contact | 2 kV AC (50 Hz, 1 min) |
| Test voltage N/O contact/N/O contact | 2.5 kV AC (50 Hz, 1 min) |
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Operating mode | 100% operating factor |
| Service life mechanical | Approx. 10^7 cycles |
| Standards/regulations | DIN VDE 0110b, Gr. C for 250 V DC |
| | DIN VDE 0160 (in relevant parts) |

Certificates / Approvals



Certification


GOST

Additional products

| Item | Designation | Description |
|----------------|--------------|---|
| General | | |
| 2777056 | UDK-RELG 4 | Basic termination blocks with test connection on both sides and double connections with the same potential for NS 32 and NS 35/7,5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos. |
| 2820149 | URELG 4 | Basic termination blocks with screw connection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos. |
| 2820712 | URELG 4-PMTK | Basic termination blocks with test connection on both sides and knife disconnection for NS 32 and NS 35/7,5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos. |
| 2829920 | ZFK-RELG 4 | Basic termination blocks with spring-cage connection for NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 4-pos. |

Diagrams/Drawings

Circuit diagram

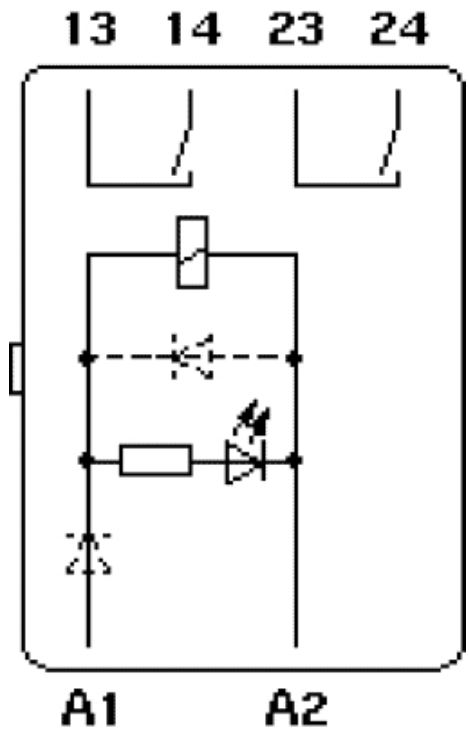

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;