

# IBS IL 24 BK-LK/45-PAC

Order No.: 2862165



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2862165>

INTERBUS bus coupler, with fiber optic connection with a 45 degree angle, 24 V DC, complete with accessories (connector and labeling field)



Commercial data	
GTIN (EAN)	4017918894658
sales group	K410
Pack	1 pcs.
Customs tariff	85389091
Weight/Piece	0.3085 KG
Catalog page information	Page 247 (AX-2009)

#### Product notes

WEEE/RoHS-compliant since:  
08/26/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

#### Technical data

##### General data

Width	85 mm
Height	119.8 mm
Depth	71.5 mm

Weight	210 g
Note on weight specifications	Without plug
Mounting type	DIN rail
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % ... 85 %
Permissible humidity (storage/transport)	75 % ... 85 %
Air pressure (operation)	80 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Test section	7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply/functional earth ground 500 V AC 50 Hz 1 min

#### Interface

Fieldbus system	Lokalbus
Name	Inline local bus
Type of connection	Inline data jumper
Transmission speed	500 kBaud
Fieldbus system	INTERBUS
Name	INTERBUS remote bus
Type of connection	4x F-SMA angled connectors
Transmission speed	500 KBit/s
Transmission physics	FO
Name	Supply
Type of connection	8-pos. Inline connector

#### Power supply for module electronics

Type of connection	Inline connectors
Supply voltage	24 V DC (via Inline connector)
Range of supply voltages	19.2 V DC ... 30 V DC (including ripple)
Current consumption	max. 1.25 A (with max. number of connected I/O terminal blocks)

#### Inline potential routing

Communications voltage $U_L$	7.5 V DC $\pm 5\%$
Power supply for $U_L$	max. 2 A DC (observe derating)
I/O supply voltage $U_{ANA}$	24 V DC -15% / +20%
Power supply for $U_{ANA}$	max. 0.5 A DC (observe derating)

## Certificates / Approvals



Certification GOST

## Accessories

Item Designation Description

### Assembly

Item	Designation	Description
1201442	E/UK	End clamp, for assembly on NS 32 or NS 35/7,5 DIN rail

### Marking


0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm

### Plug/Adapter

2727608	IB IL SCN-8-CP	Inline connector, colored
---------	----------------	---------------------------


## Diagrams/Drawings

Connection diagram

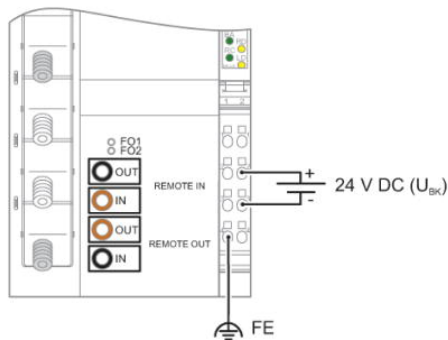


Block diagram

---

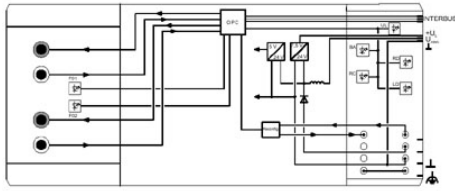

Dimensioned drawing

---

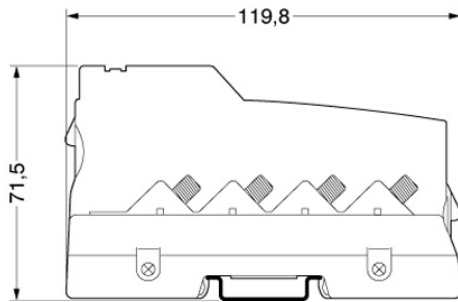

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;