

Antenna - RAD-ISM-900-ANT-OMNI-RPSMA - 2885676

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Omnidirectional antenna, 900 MHz, gain: 2 dBi, polarization: linear, degree of protection: IP55, connection: RSMA (male)

Why buy this product

- ✓ For freely mobile applications
- ✓ For multipoint or mesh connections

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 148962
GTIN	4046356148962

Technical data

Ambient conditions

Degree of protection	IP55
Ambient temperature (operation)	-20 °C ... 65 °C

General

Frequency range	900 MHz
	900 MHz
Horizontal beamwidth	360 °
Vertical beamwidth	NA
Polarization	Linear vertical
Impedance	50 Ω
Gain	2 dBi
Connection method	RSMA (male)
Material	Polyurethane (Antenna housing)


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Antenna - RAD-ISM-900-ANT-OMNI-RPSMA - 2885676

Schematic diagram

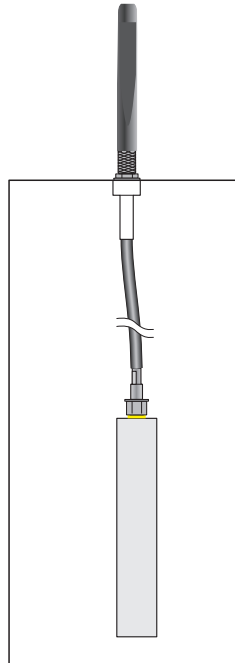

Installation example

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>