

RAD-80211-XD/HP

Order No.: 2900046




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2900046>

High power WLAN wireless transceiver (transmitter and receiver) with Ethernet, RS-232, RS-485/RS-422 interface, for 2400 MHz ISM band



Ethernet

Commercial data

GTIN (EAN)	 4 046356 462105
Note	Made-to-order
sales group	H172
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 675 (IF-2011)

Product notes

WEEE/RoHS-compliant since:
11/03/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Wireless set

Set contents	1 transceiver
--------------	---------------

Wireless path

Direction	Bi-directional
-----------	----------------

Frequency range	2.4032 GHz ... 2.4799 GHz
Transmission power	400 mW

Serial interface

Name	RS-232
Data rate	300 ... 57,6 kBit/s
Connection method	9-pos. D-SUB (female connector)
File format/coding	Asynchronous
Data flow control/protocols	RTS/CTS
Name	RS-485/RS-422
Data rate	300 ... 57,6 kBit/s
Connection method	COMBICON plug-in screw terminal block

Supply

Supply voltage	24 V DC
Supply voltage range	12 V DC ... 30 V DC
Typical current consumption	230 mA
Max. current consumption	280 mA
Nominal power consumption	5.52 W

General data

Width	45 mm
Height	99 mm
Depth	115 mm
Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C
Degree of protection	IP20
Mounting position	Any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Housing material	Polyamide PA non-reinforced
Conformance	FCC Directive, Part 15.247 ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²

Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals

Certification Ex: CUL-EX LIS, UL-EX LIS


Accessories

Item	Designation	Description
Antennas		
2867461	RAD-ISM-2400-ANT-OMNI-2-1	Omni-directional antenna, IP65 degree of protection, linear vertical, 2 dBi gain, cable length 1.5 m, MCX (male) connection, impedance 50 Ω, apex angle h/v 360°/75°
2885919	RAD-ISM-2400-ANT-OMNI-6-0	Omni-directional antenna, degree of protection IP55, 6 dBi gain, linear vertical, N (female), impedance 50 ohms, apex angle h/v 360°/30°
2867623	RAD-ISM-2400-ANT-OMNI-9-0	Omni-directional antenna, IP65 degree of protection, 9 dBi gain, linear vertical, N (female) connection, impedance 50 ohms, apex angle h/v 360°/15°
2867610	RAD-ISM-2400-ANT-PAN- 8-0	Panel antenna, degree of protection IP55, 8 dBi gain, linear vertical, SMA (female), impedance 50 ohms, apex angle h/v 75°/70°
2867885	RAD-ISM-2400-ANT-PAR-19-0	Parabolic antenna, IP65 degree of protection, 19 dBi gain, linear vertical, N (female) connection, impedance 50 Ω, apex angle h/v 17°/11°
2885702	RAD-ISM-2400-ANT-VAN- 3-1-MCX	Omni-directional antenna with vandalism protection, gain 3 dBi, degree of protection IP55, cable length 1.5 m, MCX connection (male), apex angle h/v 360°/85°, corresponding material available for panel mounting.
General		
2885838	RAD-ISM-2400-DATA-CONFIG-KIT	Configuration set, consisting of configuration software RAD Link 3.1, Quick Start Guide and User Manual in printed form and interface cable (D-SUB9 to USB)

2885472	RAD-SOL-SET-24-100	24 V / 100 Wp solar system for worldwide use. Consisting of a solar panel, prewired control cabinet with charge controller, solar batteries, fuses, surge protection and assembly material (including mast clips).
---------	--------------------	--

Diagrams/Drawings

Block diagram

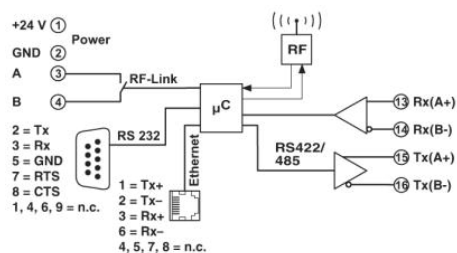

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;