

Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and male D-SUB miniature pin strip, for mounting on NS 35 rails, 37-pos.

Your advantages

- ✓ These VARIOFACE modules are used in combination with the relevant front adapters



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356545082

Technical data

Dimensions

Width	101 mm
Height	65.5 mm
Depth	45.1 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	25 V AC
	60 V DC
Max. perm. current (per branch)	2 A
Number of positions	37
Status display	No
Mounting position	any

Connection data for connection 1

Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

Technical data

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

Supported controller

Controller	HONEYWELL Experion PKS C300/C-Series
- suitable I/O card	TDIL01 (non-redundant)
	TDIL11 (redundant)
	TDOB01 (non-redundant)
	TDOB11 (redundant)
	TAIX01 (non-redundant)
	TAIX11 (redundant)
	TAOX01 (non-redundant)
	TAOX11 (redundant)

Standards and Regulations

Standards/regulations	DIN EN 50178
Flammability rating according to UL 94	V0


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

Circuit diagram

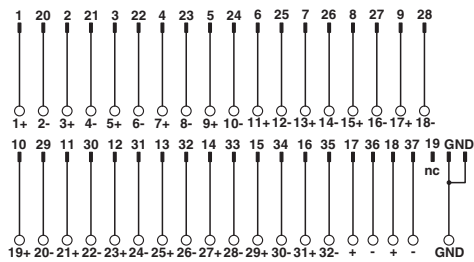

Connection scheme VIP-2/SC/D37SUB/M/SO

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	--	--------------------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>