


Interface module - VIP-2/PT/D15SUB/F/LED - 2904264

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with psh-in connection and D-subminiature socket strip, for mounting on NS 35 rails, with LED, 15-pos.

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 813419 |
| GTIN | 4046356813419 |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 52 mm |
| Height | 72.1 mm |
| Depth | 46.6 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|---------------------------------|---------|
| Max. perm. operating voltage | 24 V DC |
| Max. perm. current (per branch) | 2 A |
| Number of positions | 15 |
| Status display | LED |
| Mounting position | any |

Connection data for connection 1

| | |
|-------------------|--------------------|
| Connection name | Field level |
| Connection method | Push-in connection |
| Stripping length | 8 mm |

Interface module - VIP-2/PT/D15SUB/F/LED - 2904264

Technical data

Connection data for connection 1

| | |
|----------------------------------|--|
| Conductor cross section solid | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 26 ... 14 |

Connection data for connection 2

| | |
|-----------------------|--------------------|
| Connection name | Controller level |
| Connection method | D-SUB socket strip |
| Number of connections | 1 |
| Number of positions | 15 |

Standards and Regulations


| | |
|----------------------------------|--------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| Rated surge voltage | 1.2 kV |
| Degree of pollution | 2 |
| Overvoltage category | II |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Circuit diagram

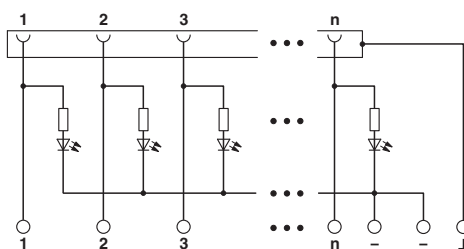

Approvals

Approvals

Approvals


CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized


Ex Approvals


Interface module - VIP-2/PT/D15SUB/F/LED - 2904264

Approvals

Approval details

| | | | |
|----------------------------|---|---|---------|
| CSA |  | http://www.csagroup.org/services-industries/product-listing/ | 2122203 |
| Nominal voltage UN | | 24 V | |
| Nominal current IN | | 2 A | |
| mm ² /AWG/kcmil | | 26-14 | |

| | | | |
|----------------------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| Nominal voltage UN | | 24 V | |
| Nominal current IN | | 2 A | |
| mm ² /AWG/kcmil | | 26-14 | |

| | | | |
|----------------------------|---|---|---------------|
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| Nominal voltage UN | | 24 V | |
| Nominal current IN | | 2 A | |
| mm ² /AWG/kcmil | | 26-14 | |

| | | |
|-----|---|--------------------------|
| EAC |  | RU C- DE.A*30.B.01742 |
|-----|---|--------------------------|

| | |
|------------------|---|
| cULus Recognized |  |
|------------------|---|

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>