



Extract from the online catalog

UM 25-D15SUB/S/FRONT/Q

Order No.: 2959599

The illustration shows the version UM 25-D 9SUB/B/FRONT/Q



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959599>

VARIOFACE SLIM LINE, with screw connection and D-subminiature pin strip, for assembly at a right angle on NS 35/7.5, 15 positions

Commercial data	
EAN	4017918086244
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1452 KG
Catalog page information	Page 287 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
08/11/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	125 V AC/DC
Max. current carrying capacity per branch	1 A (data valid for 100% coincidence factor)
Number of positions	15
Width	25 mm
Height	45 mm

UM 25-D15SUB/S/FRONT/Q Order No.: 2959599
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959599

Depth	147 mm
Ambient temperature (operation)	-10 °C ... 50 °C
Ambient temperature (storage/transport)	-10 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min)
Mounting position	Any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

Certificates / Approvals




Certification

GOST

UM 25-D15SUB/S/FRONT/Q Order No.: 2959599
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959599>

Drawings

Circuit diagram

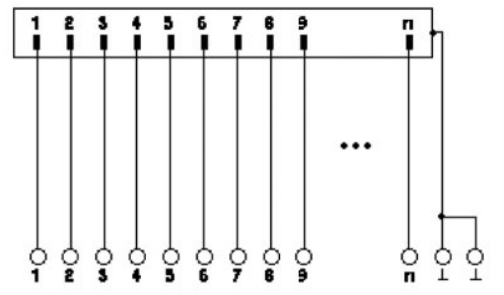

onlinecomponents.com

UM 25-D15SUB/S/FRONT/Q Order No.: 2959599
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959599>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com