

Active module - UM-2KS50/32RM/MR/21/SPT/CS - 2968519


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



32-channel relay module for Yokogawa ADV 551 and ADV 561 digital output modules. Redundant system connection, spring-cage connection on the field side. Pluggable relays with status indicator (LED) per channel.



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 340625
GTIN	4046356340625

Technical data

Dimensions

Width	506 mm
Height	126 mm
Depth	64 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Typical input current at U_N	9 mA
Typical response time	5 ms
Typical release time	7 ms
Protective circuit/component	Damping diode
	Damping diode
	Fuse
Operating voltage display	Green LED

Active module - UM-2KS50/32RM/MR/21/SPT/CS - 2968519

Technical data

Input data

Status display/channel	Yellow LED
------------------------	------------

Output data

Contact type	1 PDT
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V AC/DC
Limiting continuous current	4 A (see derating curve)
Min. switching current	100 mA
Interrupting rating (ohmic load) max.	96 W (at 24 V DC)
	20 W (at 48 V DC)
	18 W (at 60 V DC)
	23 W (at 110 V DC)
	40 W (at 220 V DC)
	1000 VA (for 250 V AC)

General

No. of channels	32
Mechanical service life	approx. 2×10^7 cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data for connection 1

Connection name	Field level
Connection method	Spring-cage connection
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	Yokogawa KS-compatible
Torque	0.5 Nm
Number of connections	2
Number of positions	50
Note	Usable system cables: Phoenix Contact YUC50, Yokogawa AKB331

Supported controller

Corresponding control	YOKOGAWA CS3000 CentumVP
Corresponding I/O card	ADV551
	ADV561
Corresponding control	YOKOGAWA STARDOM

Active module - UM-2KS50/32RM/MR/21/SPT/CS - 2968519

Technical data

Supported controller

Corresponding I/O card	NFDV551
	NFDV561

Standards and Regulations

Standards/regulations	DIN EN 50178
Rated surge voltage	4 kV (Basic insulation between output contact current paths)
	6 kV (Safe isolation and reinforced insulation between input circuit and output contact paths)
Degree of pollution	2
Overvoltage category	III


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Active module - UM-2KS50/32RM/MR/21/SPT/CS - 2968519

Circuit diagram

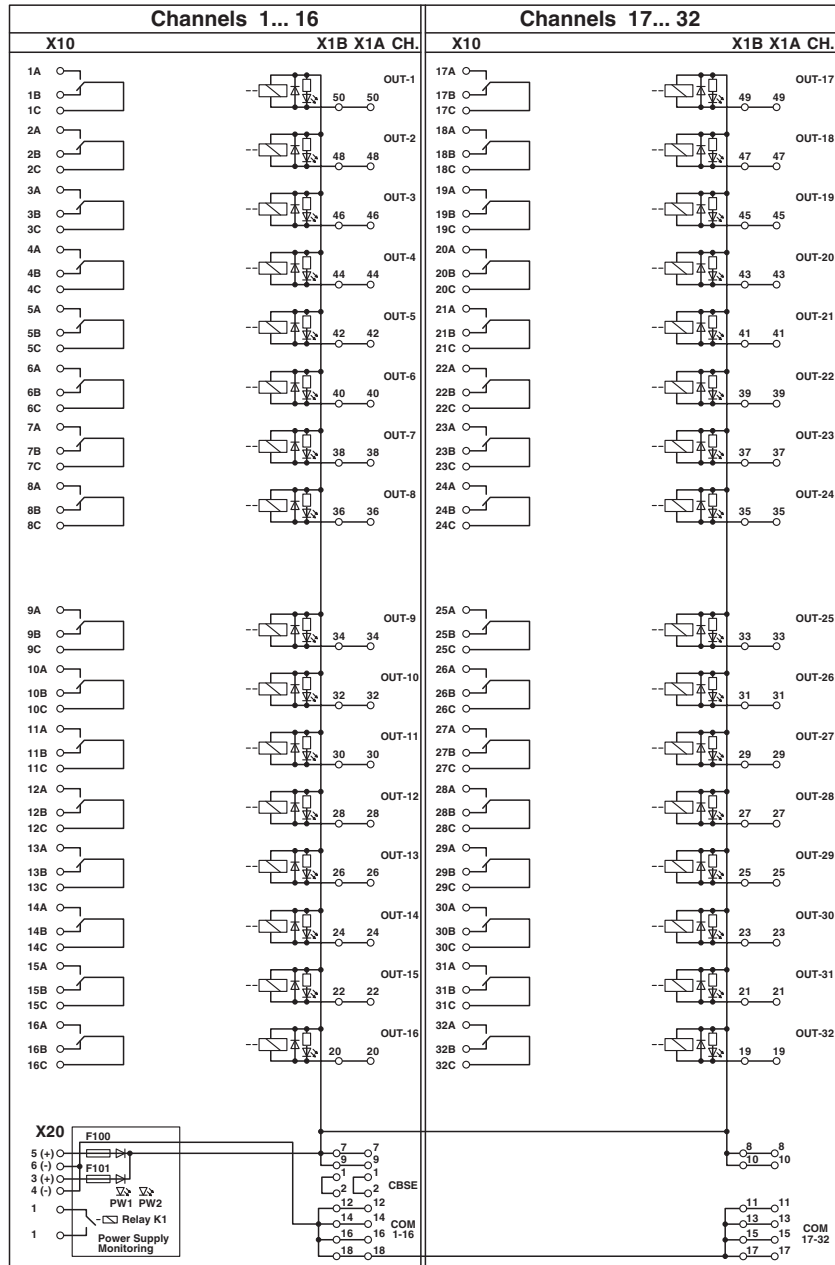

Approvals

Approvals

Approvals

EAC

Active module - UM-2KS50/32RM/MR/21/SPT/CS - 2968519

Approvals

Ex Approvals

Approval details

EAC



RU C-
DE.A*30.B.01742

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>