

# AI 70 -20 YE

Order No.: 3201848

The figure shows the version AI 1-6 YE



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201848>

Ferrule, Length: 37 mm, Color: yellow

## Commercial data

|                          |                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | <br>4 017918 156923 |
| sales group              | B250                                                                                                  |
| Pack                     | 25 pcs.                                                                                               |
| Customs tariff           | 85369010                                                                                              |
| Catalog page information | Page 305 (CL2-2011)                                                                                   |

## Product notes

WEEE/RoHS-compliant since:  
08/01/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General

|               |                                                   |
|---------------|---------------------------------------------------|
| Note          | Ferrules are not included in DIN 46228-4: 1990-09 |
| Length (b)    | 37 mm                                             |
| Color         | yellow                                            |
| Material      | E-CU                                              |
| Sleeve length | 20 mm                                             |

|                                              |         |
|----------------------------------------------|---------|
| Inner dimension of the insulating collar (d) | 16 mm   |
| Ferrule diameter                             | 12.7 mm |
| Insulating collar thickness                  | 0.6 mm  |
| Sleeve wall thickness                        | 0.35 mm |

Certificates / Approvals




Certification

CSA, CSAus-COMP

Diagrams/Drawings

Dimensioned drawing

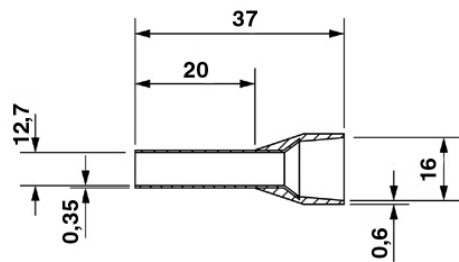

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;