

Ferrule - AI-WM 1-8 RD - 3240544

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Ferrule with insulating collar that can be labeled. When using the magazine, the ferrules can be labeled with BLUEMARK.

Why buy this product

- Ferrules can be labeled with BLUEMARK
- Corresponding crimping pliers from the TOOL fox tool range can be found in the CLIPLINE catalog, part 2
- Crimping and marking in one step
- Highly resistant and optimum printing quality thanks to modern UV printing technology
- Electrogalvanized
- Ferrules made from electrolytic copper

Key Commercial Data

Packing unit	780 STK
Minimum order quantity	780 STK
GTIN	 4 046356 528146
GTIN	4046356528146

Technical data

Dimensions

Length (b)	29.5 mm
Width (a)	4.6 mm
Sleeve length	8 mm
Inner dimension of the insulating collar (d)	3 mm
Ferrule diameter	1.8 mm
Sleeve wall thickness	0.15 mm
Inner diameter (f)	1.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

Ferrule - AI-WM 1-8 RD - 3240544

Technical data

Ambient conditions

Short-term temperature	120 °C
Max. permanent temperature	105 °C (-40°C no load / 0°C dynamic load)

General

Color	red
Components	free from silicone and halogen
Flammability rating according to UL 94	HB
Material	E-CU
Coating	tin-plated (galvanic)

Standards and Regulations


Flammability rating according to UL 94	HB
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

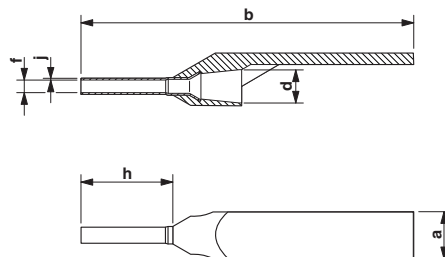

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approval details

Ferrule - AI-WM 1-8 RD - 3240544

Approvals

EAC		7500651.22.01.00246
-----	---	---------------------

EAC		EAC-Zulassung
-----	---	---------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>