

Passive module - UM-DELTA V/D/SI/BFI/TP - 5603257

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Fuse module with shield connection terminals and fuse failure display (for digital cards of the Delta V control system)

Your advantages

- ✓ These system-specific interface modules for DeltaV modules are used in combination with the relevant system cables



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 955014
GTIN	4017918955014

Technical data

Dimensions

Width	61 mm
Height	126 mm
Depth	71 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	24 V DC
Max. perm. current (per branch)	50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Number of positions	16
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection

Passive module - UM-DELTA V/D/SI/BFI/TP - 5603257

Technical data

Connection data for connection 1

Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	16
Pitch	2.54 mm

Supported controller

Controller	Emerson Delta V
- suitable I/O card	VE4001S2T2B3
	VE4001S2T2B3 Series 2
	VE4001S2T1B3
	VE4002S1T1B3
	VE4002S1T2B3
	VE4002S1T2B3 Series 2

Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	IEC 60664
	DIN EN 50178


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Passive module - UM-DELTA V/D/SI/BFI/TP - 5603257

Circuit diagram

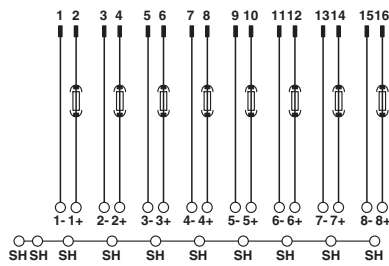

Connection scheme UM-DELTA V/D/SI/BFI/TP

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		24 V	
Nominal current IN		2 A	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		24 V	
Nominal current IN		2 A	

EAC		EAC-Zulassung
-----	--	---------------

cULus Recognized	
------------------	--

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>