


FEATURES:

- ✓ Flexible test lead sets are a perfect interface for multimeters configured with 4 mm sheathed safety jacks.
- ✓ Test leads comply with IEC 1010-2-031.
- ✓ Plug and housing are molded directly to the cable in an integral one piece design and the wire is double crimped for a long lasting connection.
- ✓ Multi-leaf banana spring is beryllium copper, nickel plated for extended insertion cycle life and low contact resistance.
- ✓ High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.
- ✓ Test leads can mate to a broad assortment of Pomona test probes, alligators, spade lugs, etc.

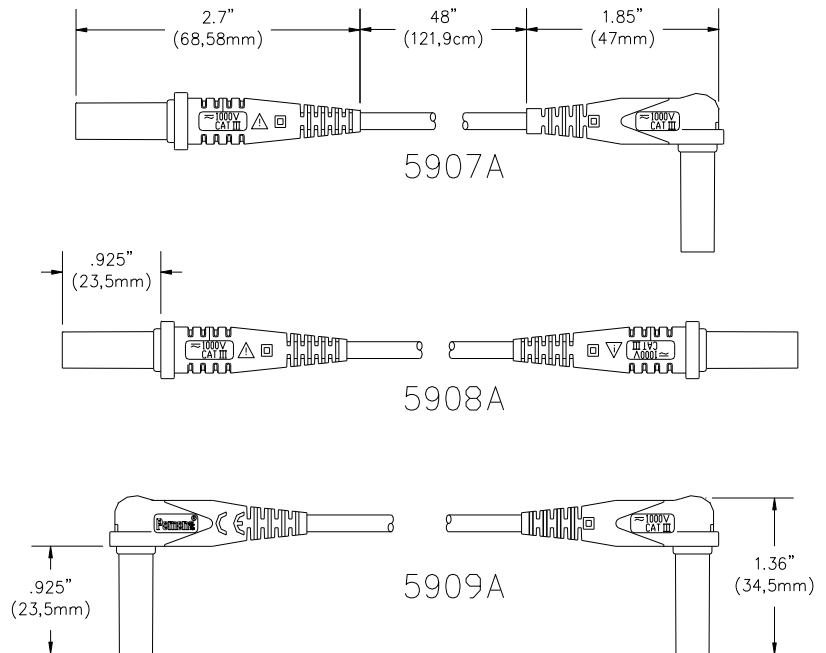

MATERIALS:

Plug: Brass, Nickel plated

Spring: Beryllium Copper, Nickel plated

Insulator: Santoprene

Wire: 18 AWG

Wire Insulation: Silicone, O.D. 0.144" Nom.

RATINGS:

IEC 1010 2-031, Category III, P2 Compliant

Operating Temperature: -4° to +131°F (-20 to +55°C)

Operating Voltage: 1,000 VRMS/DC Max.

Current: 10 Amperes Max.

ORDERING INFORMATION:

Standard length is 48" (121,9cm)*

Model: 5907A (set includes one red and one black lead - ideal for hand-held multimeters)

Model: 5908A (set includes one red and one black lead - ideal for bench multimeters)

Model: 5909A (set includes one red and one black lead - ideal for special right angle access applications)

* For custom lengths, contact Technical Support at technicalsupport@pomonatest.com.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)

For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com