


Typ EI30/18 2,3 VA

Additional product range*

EN 61558, EN 60950
Potted under vacuum
Two-chamber bobbin
Temperature class t_a 70° C/B
Short-circuit-proof 

- * Other primary and secondary voltages on request
- * Other temperature classes on request
- * Weight 0.112 kg
- * Packaging unit: 25 pieces
- * Frequency 50/60Hz
- * Class 2 available on request

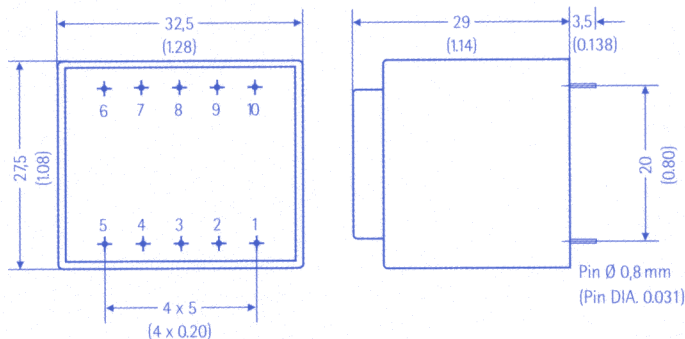

View of pins
Dimensions in mm
Inches equivalents in
parentheses

CE

Primary	Pin	Secondary	No-Load Voltage	Pin	Types Ref. No.	Approvals
2x 115 V	1-2/4-5	6 V 384 mA	10,00 V	7-9	BV 030-6797.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	9 V 256 mA	13,80 V	7-9	BV 030-6800.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	12 V 192 mA	18,60 V	7-9	BV 030-6803.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	15 V 154 mA	23,80 V	7-9	BV 030-6806.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	18 V 128 mA	27,80 V	7-9	BV 030-6809.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	24 V 96 mA	34,70 V	7-9	BV 030-6815.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	2 x 6 V 192 mA	2 x 9,90 V	6-7/9-10	BV 030-6820.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	2 x 9 V 128 mA	2 x 14,00 V	6-7/9-10	BV 030-6823.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	2 x 12 V 96 mA	2 x 17,50 V	6-7/9-10	BV 030-6826.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	2 x 15 V 77 mA	2 x 24,40 V	6-7/9-10	BV 030-6829.0 T	1 · 2 · 3 · 4 · 5 · 10 · 11
2x 115 V	1-2/4-5	2 x 18 V 64 mA	2 x 29,30 V	6-7/9-10	BV 030-6832.0	3 10
2x 115 V	1-2/4-5	2 x 24 V 48 mA	2 x 35,80 V	6-7/9-10	BV 030-6838.0	3 10

Specifications subject to change without notice.

Approval
symbol



TRANS era - there is competence behind it
Electronics Inc.

Transera Electronics Inc., 7 Colby Court, Waterloo, Ontario N2V 1Y9, Canada, Phone +519-885-5040, Fax +519-885-55 52
www.trans-era.com, sales@trans-era.com