


DS-068-R Series - Metal Can Type Vertical PCB Mount DIN Socket

8 Pin Through hole vertical PCB mount
RoHS compliant (suffix -R)

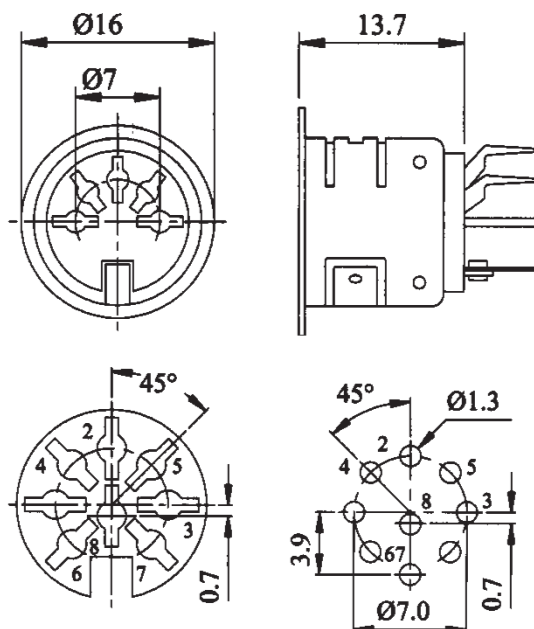

Specification:

Insulator Material:	PBT UL94V-0 Black
Contact Material:	Brass - Tin plated
Can Material:	Copper Alloy -Ni Plated
Current Rating:	20V DC, 2.0 Amps
DWV:	500V AC for 1 minute
Insulation Resistance:	100M Ω min. @ 250V DC
Contact Resistance:	60m Ω to 100m Ω Max (after durability test)
Operating Temperature:	-25°C to +85°C