


## Plug-in units with trapeziform extractor handle, type 1 – front panel, U-profile, shielded

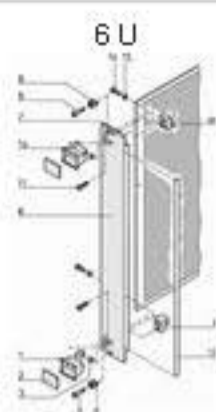

Product illustrations are exemplary illustrations and can deviate from supplied products.

Part no.: 20848-496

### Features:


- At 6 U the board position can be offset by 1 HP to the right by swapping the top and bottom board supports; thus space is created for SMD components on the left (solder) side; for board thickness 1.6 mm only



### Technical Information:

Height	Width
6 U	8 HP

### Downloads:

3D PDF (STEP/DWG/DXF/PDF) (Log in required) 

User Manual (Log in required)

User Manual (Log in required)

To gain access to the additional information you must log in.  
If you do not yet have a user name, you may register here.

### Delivery comprises: kit

Item	Qty	Description
1	1	Extractor handle, trapezium shape, PPE, grey, bottom
1a	1	Extractor handle, trapezium shape, PPE, grey, top
2	2	Identification plate, Al, 1.5 mm, anodised, cut edges plain
3	2	Bearing female connector, Ms
4	1	Printed board bracket, Zn, die-cast, bottom
4a	1	Printed board bracket, Zn, die-cast, top
6	1	U front panel for extractor handle in trapezium shape, anodised front, conductive rear
7	2	Alignment pin, pressed-in, stainless steel
8	2	Sleeve, PA, grey, up to 7 HP front panel width
8	4	Sleeve, PA, grey, from 8 HP front panel width
9	2	Pozidrive collar screw, St, nickel-plated, M2.5 × 12.3, up to 7 HP front panel width
9	4	Pozidrive collar screw, St, nickel-plated, M2.5 × 12.3, from 8 HP front panel width
11	2	Raised countersunk screw, M2.5 × 8
12	1	EMC textile gasket
13	2	Washer, A2.7, DIN 125
14	2	Pozidrive flathead screw, St, nickel-plated, M2.5 × 10

Add to basket

