



Fuseholder open design Type OG



0031.8001



Cover
0853.9561

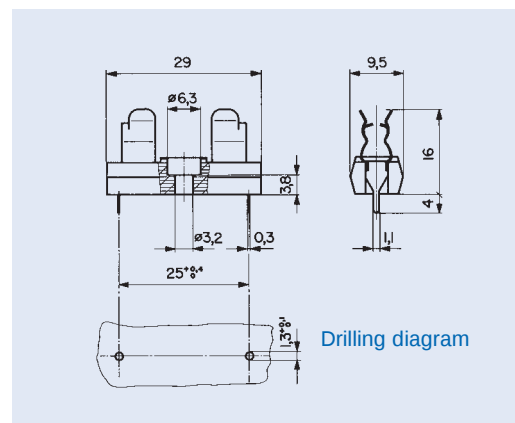

- PCB-terminals, tin-plated

Technical data

- Rated voltage: 250 V
- Rated current: 10 A
- Rated power acceptance at ambient air temperature T_a 23 °C:
without cover: 2,5 W
with cover: 2 W
- Power acceptance at higher T_a :
see derating curves
Take note of the information
on pages 215–219
- Allowable ambient air
temperatures T_a : -40 °C to +85 °C
- Contact resistance: 5 mΩ
- Dielectric strength: 4 kV, 50 Hz,
1 Min. between metal board and
terminals
- Materials
socket: thermoset, UL 94V-0
clips: copper-alloy, tin-plated



Standards

IEC 60127-6
EN 60127-6
UL 512, CSA C22.2-39

Approvals

 UL (10 A/250 V)
 CSA (10 A/250 V)

Derating curves

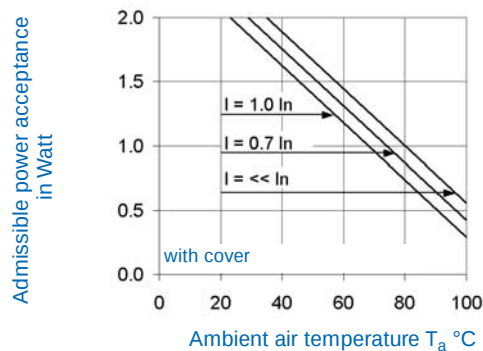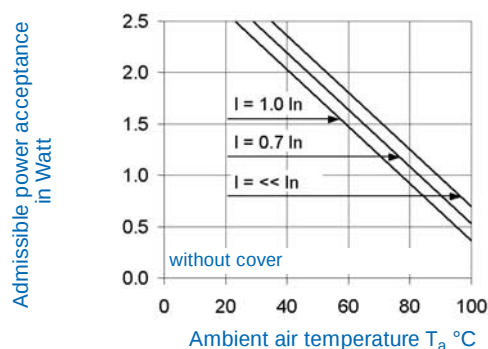

Order No.		
0031.8001	Fuseholder, black	
0853.9561	Cover	More technical data see page 183

FUSEHOLDERS

PCB mount

OG

for 5 × 20 mm

Fuseholder open design Type OG

through hole mounting




with straight terminals

0751.0052/62



with "kicked" terminals

0751.0110



Technical data

- Rated voltage: 250 V*
- Rated current: 6,3 A: 0751.0052/62
0751.0110
- Rated power acceptance at ambient air temperature T_a 23 °C:
2,5 resp. 2,0 W*
- Power acceptance depending on the ambient air temperature T_a :
see derating curves
Additional information
see pages 215–219
- Allowable ambient air temperatures
 T_a : -40 °C to +85 °C
- Contact resistance: 5 mΩ*
- Clip-Material: bronze or brass,
tin-plated


*between 2 clips

Standards



IEC 60127-6
EN 60127-6
UL 512

Approvals

UL: 0751.0052 (6,3 A/250 V)

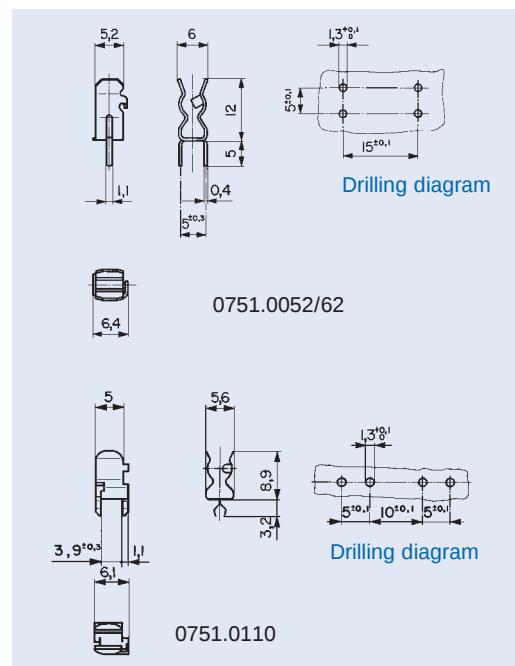

Derating curves

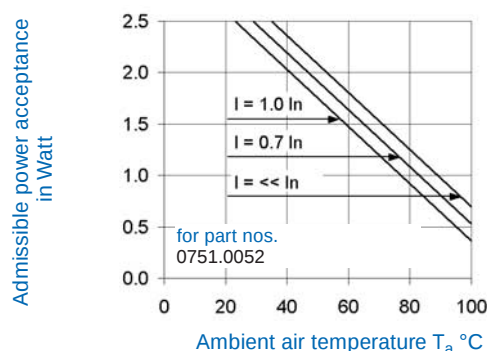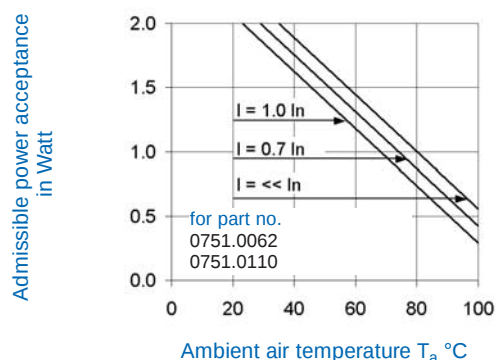

Order No.		Terminals
0751.0052	Clip, bronze, tin-plated	straight
0751.0062	Clip, brass, tin-plated	
0751.0110	Clip, brass, tin-plated	"kicked"