

Main product characteristics

$I_{F(AV)}$	10 A
V_{RRM}	45 V
V_F	0.57 V


Features and Benefits

- Very small conduction losses
- Negligible switching losses
- Extremely fast switching
- Low forward voltage drop
- Insulated package: TO-220FPAC
Insulating voltage = 2000V DC
Capacitance = 12 pF
- Avalanche capability specified

Description

Single chip Schottky rectifier suited for Switch Mode Power Supply and high frequency DC to DC converters.

This device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

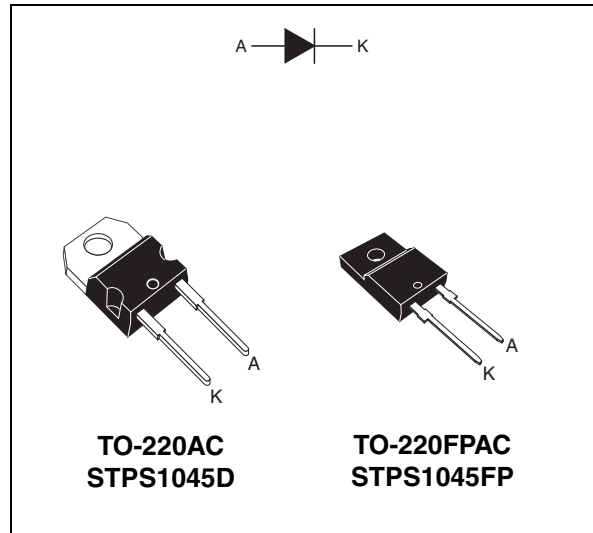

1 Characteristics

Table 1. Absolute Ratings (limiting values)

Symbol	Parameter		Value	Unit	
V_{RRM}	Repetitive peak reverse voltage		45	V	
$I_{F(RMS)}$	RMS forward voltage		30	A	
$I_{F(AV)}$	Average forward current $\delta = 0.5$	TO-220AC	$T_c = 150^\circ\text{C}$	10	A
		TO-220FPAC	$T_c = 145^\circ\text{C}$		
I_{FSM}	Surge non repetitive forward current		$t_p = 10\text{ ms}$ sinusoidal	180	A
	Repetitive peak reverse current		$t_p = 2\ \mu\text{s}$ $F = 1\ \text{kHz}$	1	A
P_{ARM}	Repetitive peak avalanche power		$t_p = 1\ \mu\text{s}$ $T_j = 25^\circ\text{C}$	4000	W
T_{stg}	Storage temperature range		-65 to + 175		$^\circ\text{C}$
T_j	Maximum junction temperature		175		$^\circ\text{C}$
dV/dt	Critical rate of rise of reverse voltage		10000		$\text{V}/\mu\text{s}$

Table 2. Thermal resistances

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	Junction to case	TO-220AC	2.2	$^\circ\text{C}/\text{W}$
		TO-220FPAC	4.5	

Table 3. Static electrical characteristics

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			100	μA
		$T_j = 125^\circ\text{C}$				15	mA
$V_F^{(2)}$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 20\ \text{A}$			0.84	V
		$T_j = 125^\circ\text{C}$	$I_F = 20\ \text{A}$			0.72	
		$T_j = 125^\circ\text{C}$	$I_F = 10\ \text{A}$			0.60	

1. Pulse test: $t_p = 5\ \text{ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\ \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 0.42 \times I_{F(AV)} + 0.015 I_{F(RMS)}^2$$

2 Package Information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 Nm
- Maximum torque value: 0.70 Nm

Figure 12. TO-220AC dimensions


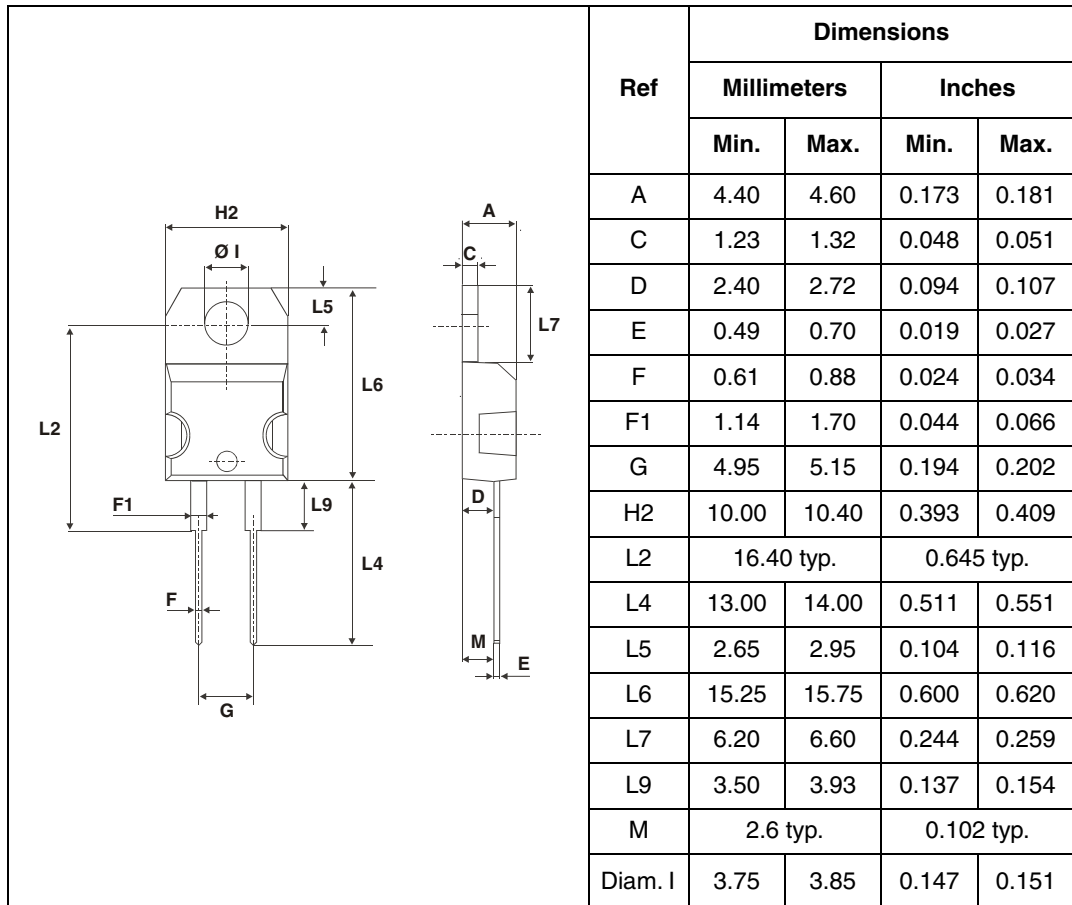


Figure 13. TO-220FPAC dimensions

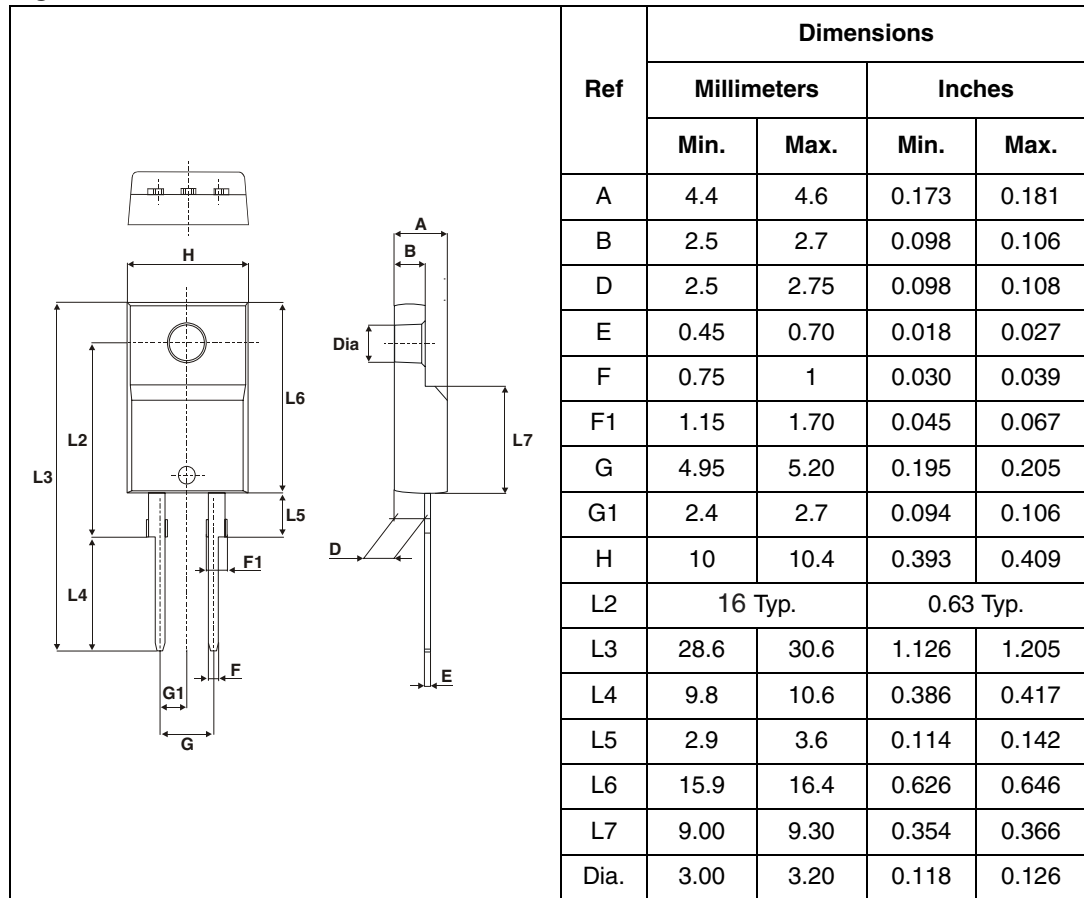

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark.

3 Ordering Information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS1045D	STPS1045D	TO-220AC	1.86 g	50	Tube
STPS1045FP	STPS1045FP	TO-220FPAC	1.9 g	50	Tube

4 Revision history

Date	Revision	Description of Changes
Jul-2003	5D	Last release.
22-Mar-2007	6	Removed ISOWATT package.