



- Industry Standard 2" x 1" Footprint
- Six Sided Shielding
- Safety Agency Certifications
- 9-36V or 18-75VDC Input

PXD30W Series

Single and Dual output 30W
DC-DC converters

Key Market Segments & Applications

- Telecom
- Datacom
- Process Control

PXD30W Features and Benefits

Features

- Safety Certification
- Wide range input
- Six sided shielding

Benefits

- Easier system approvals
- Less parts to inventory
- Reduced radiated noise

Specifications	Single Output	Dual Output
ITEMS		
Max Output Power		30W
Voltage Accuracy		±1%
Voltage Adjustment	±10%	None
Minimum Load		None
Line Regulation		±0.2%
Load Regulation	±0.5%	±1%
Cross Regulation (25% to 100%)	-	±5%
Ripple and Noise	<5.1V output: 100mV, 12-15V output: 150mV	
Start up time	30ms	
Remote on/off	Positive Logic: ON: Open or 3-12V, OFF Short or <1.2V Negative Logic: ON: Short or <1.2V, OFF: Open or 3-12V	
Temperature Coefficient	<+/-0.02%/°C	
Operating Temperature	-40°C to +85°C, derating necessary above 50°C	
Maximum Case Temperature	+105°C (Overtemperature Protection +115°C)	
Storage Temperature	-55°C to +125°C	
Thermal Shock	MIL-STD-810F	
Relative Humidity (non condensing)	5 to 95%	
Transient Response (25% step load change)	250µs recovery	
Overvoltage Protection (Zener clamp)	5V: 6.2V, 12V: 15V, 15V: 18V	
Overcurrent and Short Circuit Protection	Typically at 150%, hiccup with self recovery	
Input Surge Voltage (Maximum for 100ms)	24V input: 50V, 48V input: 100V	
Reflected input ripple (peak to peak)	20mA	
Isolation Voltage	1600VDC minimum	
Isolation Resistance	10 ⁹ Ω minimum	
Isolation Capacitance (max)	1500pF	
Typical Switching Frequency (Fixed)	430kHz	
MTBF (BELLCORE TR-NWT-000332)	3,163,000 hours	
Vibration	MIL-STD-810F	
Conducted and Radiated Emissions (1)	EN55022 Level A	
Immunity (2)	EN61000-4-2, -3, -4, -5, -6 Pref Criteria A	
Safety Agency Certifications	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark	
Size mm (L x W x H)	50.8 x 25.4 x 10	
Weight (g)	30.5	
Warranty (yrs)	3	

Model Selector					
Output Volt (V)	Output Curr (A)	Output Power (W)	Input Volt (V)	Model	Eff.(%)
Single Outputs					
3.3V	7.5A	24.75W	9 - 36VDC	PXD30-24WS3P3	86%
3.3V	7.5A	24.75W	18 - 75VDC	PXD30-48WS3P3	86%
5V	6.0A	30W	9 - 36VDC	PXD30-24WS05	88%
5V	6.0A	30W	18 - 75VDC	PXD30-48WS05	88%
12V	2.5A	30W	9 - 36VDC	PXD30-24WS12	89%
12V	2.5A	30W	18 - 75VDC	PXD30-48WS12	90%
15V	2.0A	30W	9 - 36VDC	PXD30-24WS15	89%
15V	2.0A	30W	18 - 75VDC	PXD30-48WS15	91%
Dual Outputs					
±5V	±3.0A	30W	9 - 36VDC	PXD30-24WD05	88%
±5V	±3.0A	30W	18 - 75VDC	PXD30-48WD05	88%
±12V	±1.25A	30W	9 - 36VDC	PXD30-24WD12	87%
±12V	±1.25A	30W	18 - 75VDC	PXD30-48WD12	88%
±15V	±1.0A	30W	9 - 36VDC	PXD30-24WD15	87%
±15V	±1.0A	30W	18 - 75VDC	PXD30-48WD15	88%


Specification Notes:

- (1) With external ceramic capacitor (24V: 4.7uF, 48V: 2.2uF) connected across input pins
- (2) For EN61000-4-4 & -5 compliance fit external electrolytic capacitor (24V: 330uF, 48V: 220uF) connected across input pins

Options	Single Output	Dual Output
Suffix	Function	Function
No Suffix	Positive Logic & Output Trim	Positive Logic (No trim function)
N	Negative Logic & Output Trim	Negative Logic (No trim function)

Add suffix for N option, Example PXD30-48WS12-N


Outline Drawing PXD30W Series

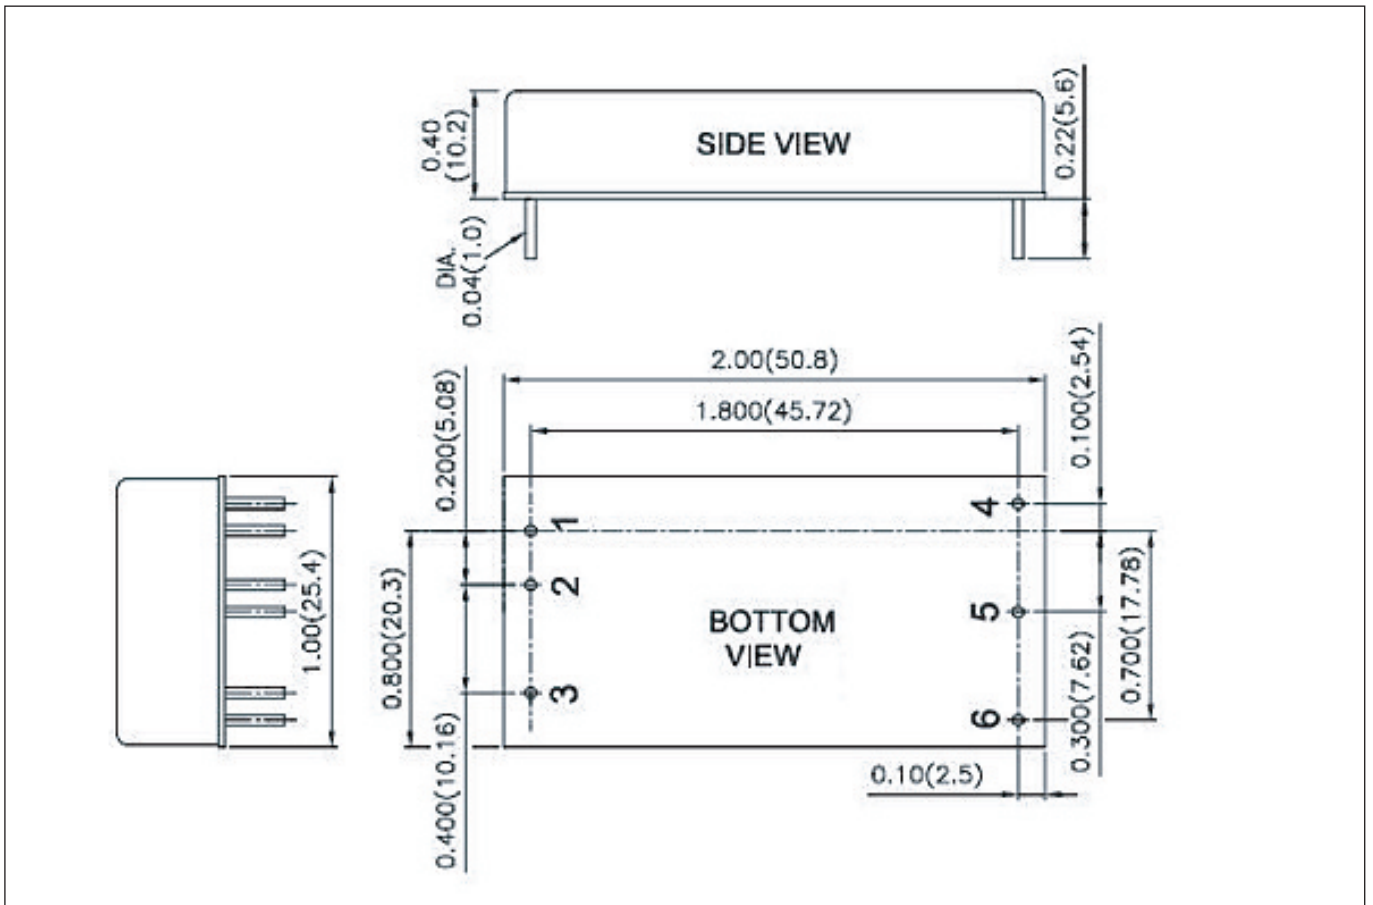

Pinout

Pin#	Function	
	Single Output	Dual Output
1	+ Input	+ Input
2	- Input	- Input
3	Remote On/Off	Remote On/Off
4	+ Output	+ Output
5	- Output	Common
6	Trim	- Output

Derating Curve PXD30W Series

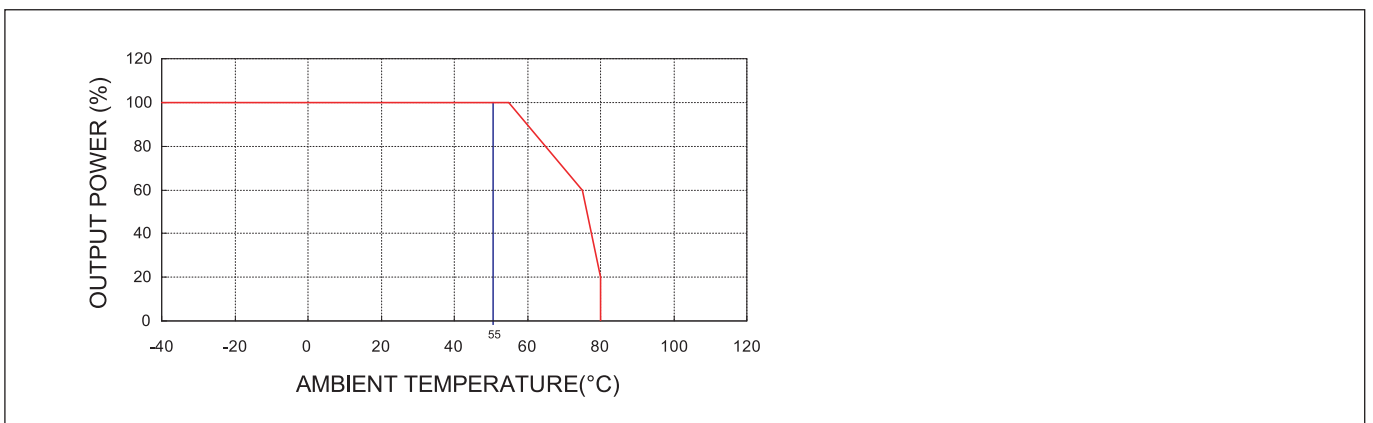



TDK-Lambda France SAS

3 Avenue du Canada
 Parc Technopolis
 Bâtiment Sigma
 91940 les Ulis
 France
 Tel: +33 1 60 12 71 65
 Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Via Giacomo Matteotti 62
 20092 Cinisello Balsamo (MI)
 Italy
 Tel: +39 02 61 29 38 63
 Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
 77855 Achern
 Germany
 Tel: +49 7841 666 0
 Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Aredstrasse 22
 2544 Leobersdorf
 Austria
 Tel: +43 2256 655 84
 Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Eichtalstrasse 55
 8634 Hombrechtikon
 Switzerland
 Tel: +41 44 850 53 53
 Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Haderslevvej 36B
 DK-6000 Kolding
 Denmark
 Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Kingsley Avenue
 Ilfracombe
 Devon EX34 8ES
 United Kingdom
 Tel: +44 (0) 12 71 85 66 66
 Fax: +44 (0) 12 71 86 48 94
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

1 Alexander Yanai
 Segula
 Petah-Tikva
 Israel
 Tel: +9 723 902 4333
 Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:
 Tel: +7 (495) 665 2627
Technical Support:
 Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.emea.lambda.tdk.com/ru

Local Distribution

