

Distributed by:

JAMECO[®]
ELECTRONICS


www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		, 19 .			LOC	DIST	P	F	REVISIONS						
© COPYRIGHT 19		BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.			G		14	ZONE			LTR	DESCRIPTION	DATE	APPD			
													T	REV PER 063A-0498-01		160CT01	JR/TM

AMP
WIRE RANGE

26-22 AWG
STRANDED

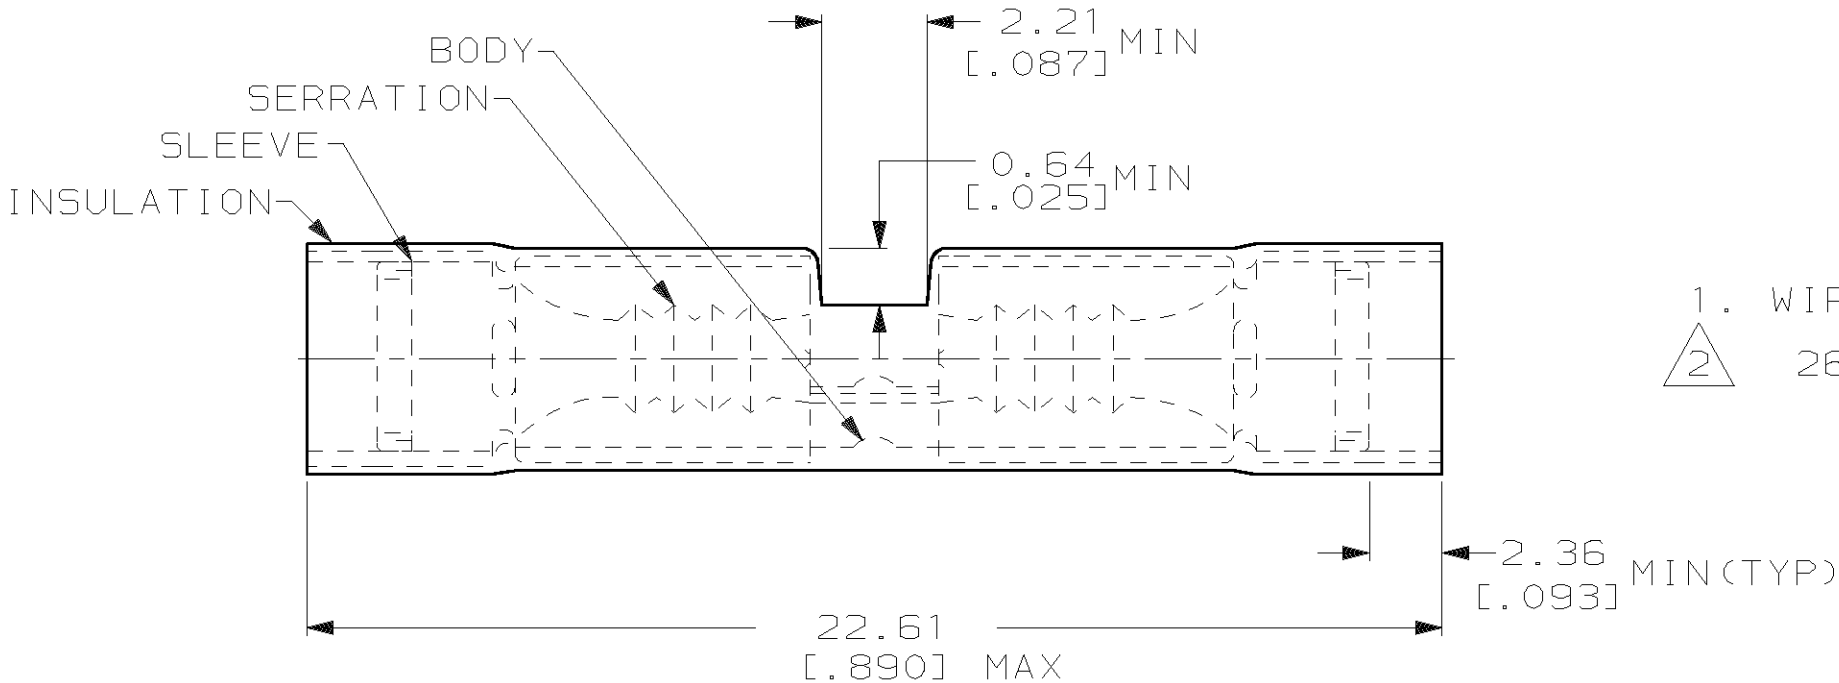

1. WIRE INSULATION DIA 1.27 [.050] TO 2.08 [.082]
2. 26-22 COMMERCIAL

Jameco Part Number 303167

-	4000	ON TAPE, REEL	△ 2-323994-1
-	50	LOOSE PIECE, BOX	△ 8-323994-2
-	50	LOOSE PIECE	△ 2-323994-2
26-24 M7928/5-1 CLASS 1 & 2	50		323994

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 105°C	MILITARY P/N & CLASS PER MIL-T-7928		QTY	PACKAGE TYPE		PART NO		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: —	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± — ANGLES ± —	DR 9-28-93 S.S. GOULDEN	CHK 9-28-93 R. HERSEY	AMP AMP Incorporated Harrisburg, PA 17105-3608				
	FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111									
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		FINISH TIN PLATE PER MIL-T-10727	PRODUCT SPEC —	APPLICATION SPEC —	WEIGHT —	SIZE	CAGE CODE	DRAWING NO	
								B	00779	C-323994	
								SCALE	NTS	SHEET	1 OF 1