


1045658 -1 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

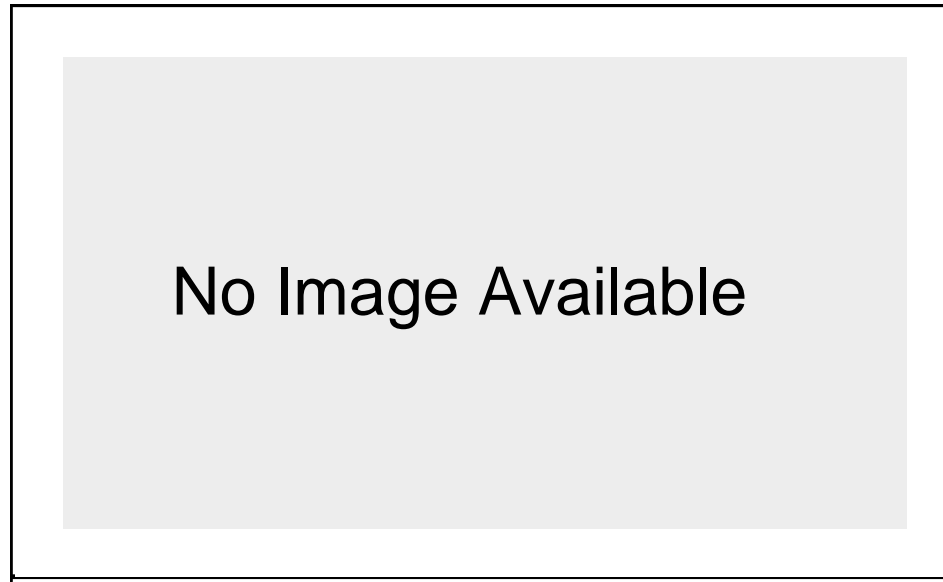

1045658 -1

[Active](#)

SSMA RF Connectors

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Connector
- ? Jack
- ? Mount Type = Bulkhead
- ? Body Style = Straight
- ? Mount Style = Front Mount

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [OSSM BULKHEAD JACK RECEPTACLE HERMETICALLY SEALED](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? Product Type = Connector
- ? Gender = Jack
- ? Body Style = Straight
- ? Termination Style = Pin Terminal
- ? Center Contact = With
- ? Dielectric Material = TFE Fluorocarbon
- ? Gasket Material = Soft Copper

Electrical Characteristics:

- ? Frequency = DC - 26.5 GHz
- ? Impedance (Nominal) (?) = 50
- ? Insulation Resistance (M?) = 5,000

Body Related Features:

- ? Mount Type = Bulkhead
- ? Mount Style = Front Mount
- ? Hermetically Sealed = Yes
- ? Gasket = With
- ? Gasket Style = Formable
- ? Contact Extension = With
- ? Contact Extension Length (mm [in]) = 1.10 [0.040]

Contact Related Features:

- ? Contact Finish = Gold Over Copper
- ? Contact Material = Beryllium Copper

Housing Related Features:

- ? Housing Material = Stainless Steel
- ? Housing Finish = Passivated

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? Terminate To = Printed Circuit Board

Other:

- ? Brand = Tyco Electronics