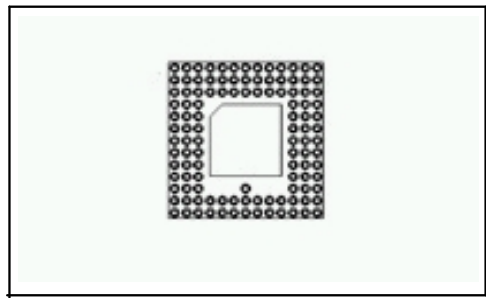


- 4

Active

Not Reviewed for ELV/RoHS Compliance

- ? Very Low Insertion Force
- ? Number of Positions = 114
- ? PCB Mount Style = Thru Hole
- ? Grid Size = 13x13
- ? Grid Spacing = Standard: 2.54 x 2.54 mm

[View all Features](#)

[Check Pricing & Availability](#)
[Search for Tooling](#)
[Product Feature Selector](#)
[Contact Us About This Product](#)

Product Drawings:

? [OPEN FRAME 13 X 13, 114 SOCKETS](#) (PDF, English)

? None Available

? None Available

? None Available

? None Available

? None Available

? Product Line Information

? Socket Pattern

? Tooling

List all Documents

(Please use the Product Drawing for all design activity)

- ? Insertion Force = Very Low
- ? Number of Positions = 114
- ? PCB Mount Style = Thru Hole
- ? Grid Size = 13x13
- ? Grid Spacing (mm [in]) = Standard: 2.54 x 2.54
[.100 x .100]
- ? Chip Compatibility = Other
- ? Frame Style = Open
- ? Sleeve Material = Brass
- ? Heat Sink Attachment = Without
- ? Profile = Standard

? Termination Post Length (mm [in]) = 2.84
[0.112]

? Socket Identifier = None

? Pick and Place Cover = None

- ? Contact Style = Stamped + Formed
- ? Contact Material = Beryllium Copper
- ? Contact Mating Area Plating = Gold (30) 24c
- ? Contact Termination Area Plating = Tin Lead over Nickel

- ? Housing Color = Black
- ? Housing Material = Glass - Filled Thermoplastic Polyester
- ? Housing Flammability Rating = UL 94V -0
- ? Housing Material Temperature = High

? RoHS/ELV Compliance = Not reviewed for ELV/RoHS compliance

? Lead Free Solder Processes = Not reviewed for lead free solder process

? Application = Production

? Packaging Method = Tube

? Brand = AMP