





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
3		CHANGE HD LENGTH TO 3.70MM	22JUL2019	WY	SZ
4		CHANGE SCREW HOLE TO 1.50MM	02AUG2019	WY	SZ
5		UPDATE SIGNAL PIN SEQUENCE	16AUG2019	WY	SZ
6		UPDATE SIGNAL PIN SEQUENCE OF E1	19MAR2020	WY	SZ

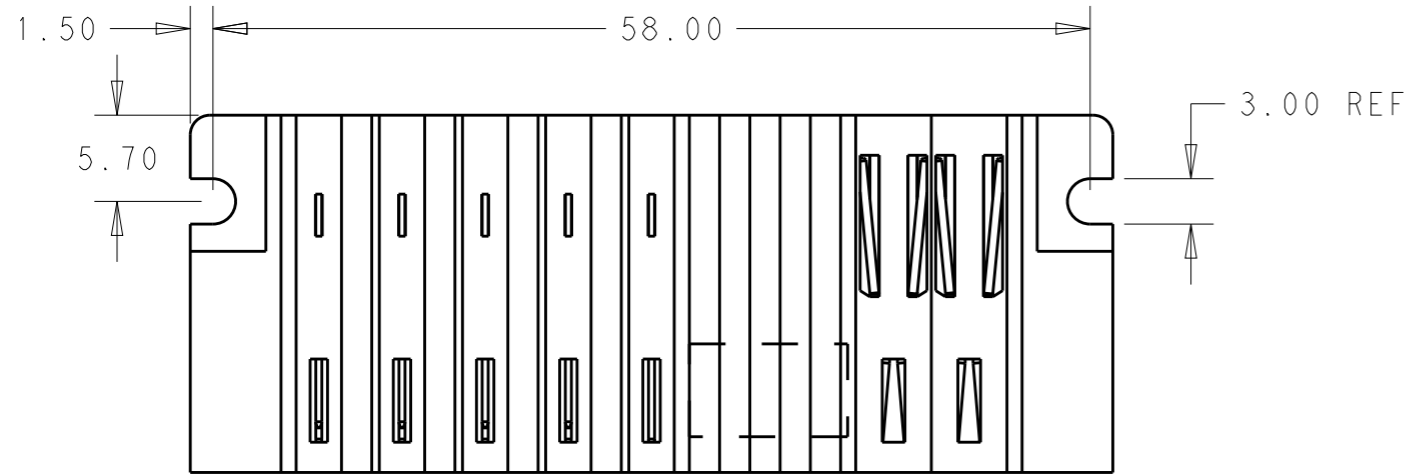

- 1 "TE", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL:  
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-O  
SIGNAL CONTACT - COPPER ALLOY  
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.003 HOLE.

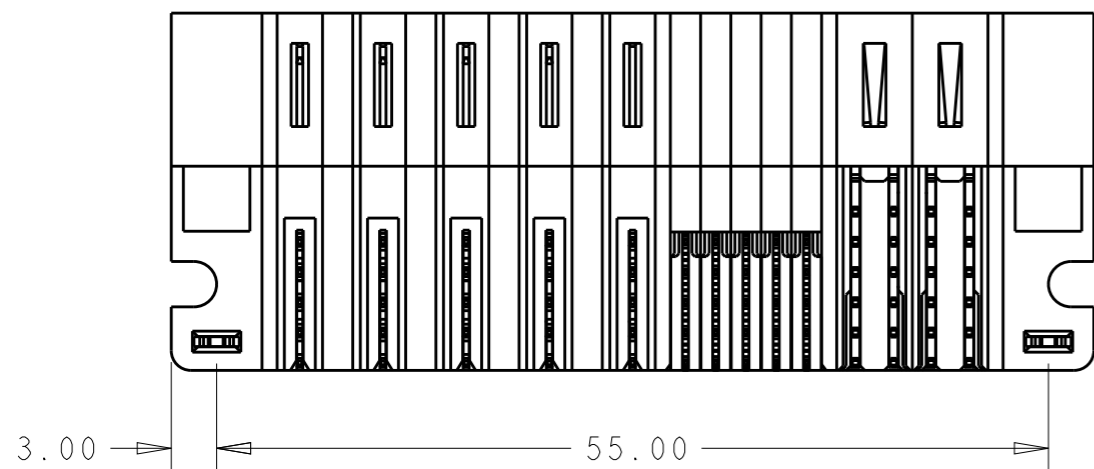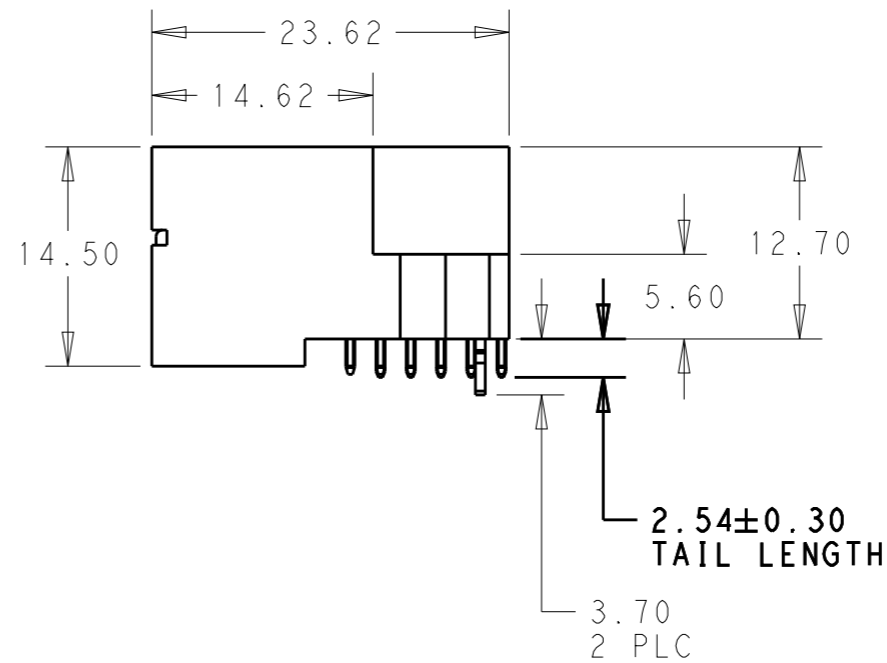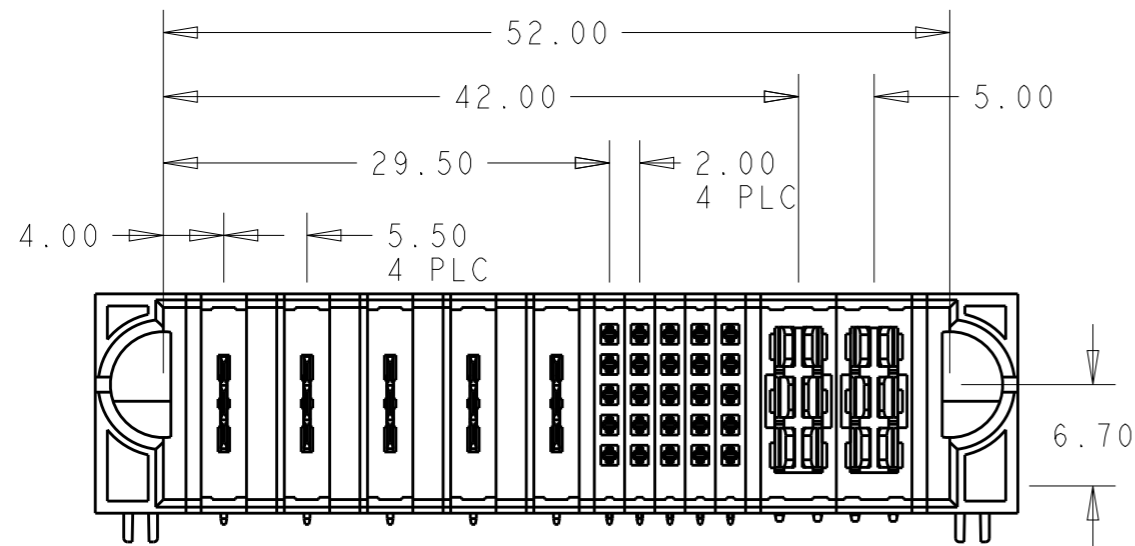

5LP + 25S + 2P	1-2334530-2
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	17JUN2019	 TE Connectivity	NAME RIGHT ANGLE HEADER, SOLDER MULTI-BEAM PLUS
DIMENSIONS: mm		CHK	17JUN2019		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	17JUN2019		
0 PLC ±- 1 PLC ±- 2 PLC ±0.15 3 PLC ±0.05 4 PLC ±- ANGLES ±-		PRODUCT SPEC	-		
MATERIAL	FINISH	APPLICATION SPEC	-	SIZE	A3
2	3	WEIGHT	-	CAGE CODE	00779
CUSTOMER DRAWING		RESTRICTED TO	-	DRAWING NO	1-2334530-2
		SCALE	1:1	SHEET	1 OF 2
		REV	6		

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


REVISIONS

© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

PART NUMBER	ROWS	LOW POWER					SIGNAL					POWER	
		LP1	LP2	LP3	LP4	LP5	1	2	3	4	5	P1	P2
1-2334530-2	E	LM	LM	LM	LM	LMF	P5	PF5	PF5	PL5	PL5	TM	TN
	D						P4	P4	P4	P4	P4		
	C						P3	P3	P3	P3	P3		
	B						P2	P2	P2	P2	P2		
	A						P1	P1	P1	P1	P1		

5LP+25S+2P

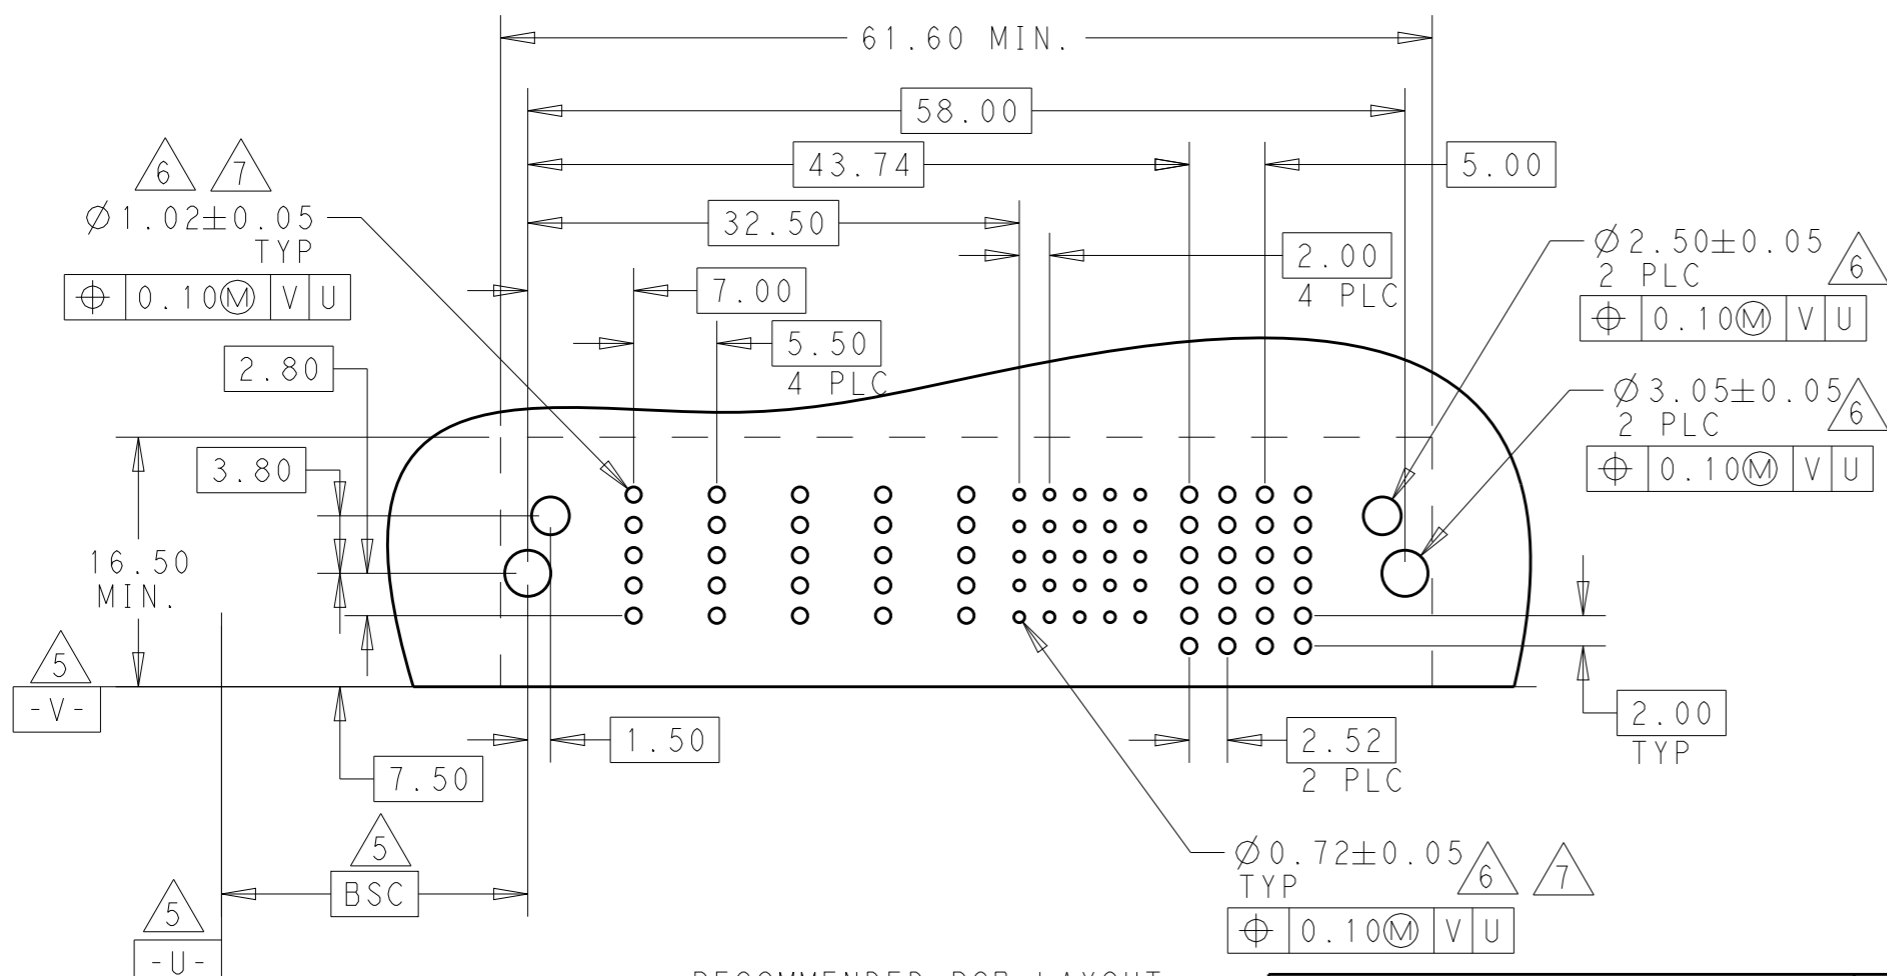

MLBF SOLDER TYPE SIGNAL CONTACT, ROW E	PL5
MFBL SOLDER TYPE SIGNAL CONTACT, ROW E	PF5
STD SOLDER TYPE SIGNAL CONTACT, ROW E	P5
STD SOLDER TYPE SIGNAL CONTACT, ROW D	P4
STD SOLDER TYPE SIGNAL CONTACT, ROW C	P3
STD SOLDER TYPE SIGNAL CONTACT, ROW B	P2
STD SOLDER TYPE SIGNAL CONTACT, ROW A	P1
STD LOWER POWER CONTACT	LM
STD SOLDER POWER CONTACT, RIGHT	TN
STD SOLDER POWER CONTACT, LEFT	TM
HOUSING	HOUSING
HOLD DOWN, MULTI-BEAM	HD
DESCRIPTION	IDENTIFIER

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±0.15
	3 PLC ±0.05
	4 PLC ±-
	ANGLES ±-
MATERIAL	FINISH

DWN WY	17JUN2019
CHK WY	17JUN2019
APVD S7	17JUN2019
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

TE Connectivity		NAME	
		RIGHT ANGLE HEADER, SOLDER MULTI-BEAM PLUS	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1-2334530-2	-
SCALE 1:1		SHEET 2 OF 2	REV 6